


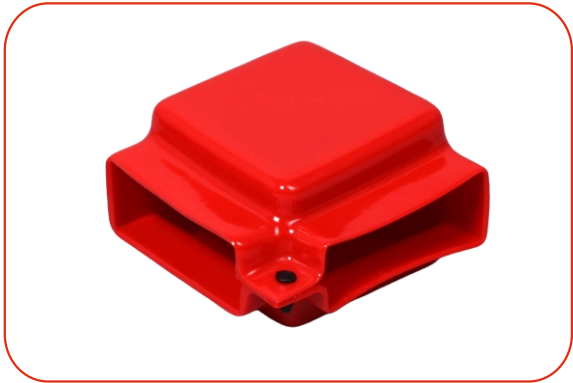

Busbar Insulation Covers are cold-applied flexible electrical insulating shrouds for busbar and switchgear connections up to 36kV. These pliable boots can be installed, removed or replaced in few minutes. The covers are designed to protect and insulate energized busbar connections from flash-overs due to accidental contact.

Made from high-quality Polyvinyl Chloride (PVC) material, to provide excellent electrical insulation and to withstand higher operating temperature continuously.

It provides the reduction in air clearance, which helps in designing compact panels; thereby reducing the material costs by saving in busbar lengths, sheet metal components, etc.

KEY FEATURES AND BENEFITS:

- High Dielectric strength
- Excellent electrical & thermal properties and high mechanical strength
- Provides a significant reduction in air clearances.
- Resistance to weathering, UV rays, Chemicals and Solvents.
- Suitable for indoor and limited outdoor applications up to 36 kV.
- Provides flash-over protection on Tee, Elbow and Straight connections
- Adaptable to different busbar configurations and installation requirements.
- Operating temperature level up to 105°C.
- Easy to install and remove for inspection and maintenance.
- Prevents Busbar from chemical corrosion affected by strong acid, alkali, salt, etc.

Technical Properties		
Test Description	Typical Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.2 gm/cm ³	ASTM D792
Hardness	65 +/- 5 Shore A	ASTM D2240
Continuous Operating Temp.	-20°C to +115°C	IEC 216
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹² Ohm.cm (min.)	ASTM D257

