


Cast Resin Cable Jointing Kit

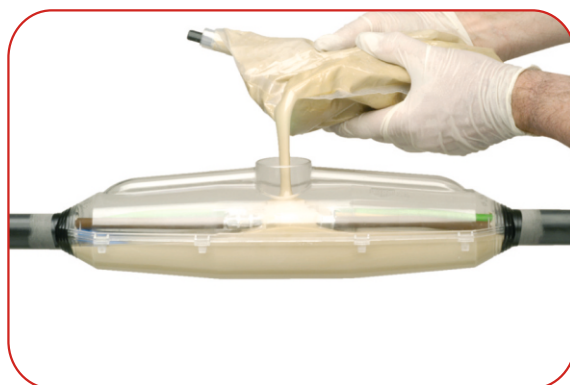

AEX Cast Resin Joints are universally suitable for the connection of PVC / XLPE / PE and EPR insulated polymeric cables/ conductors. Suitable for compression and screw connectors on copper and aluminium conductors.

❖ Features & Benefits:

- Transparent plastic shell allows visibility of splice area before casting
- High quality polycarbonate shell
- Resistant to UV, Chemical and alkaline
- Excellent Mechanical and Electrical Strength
- Easy to install
- Suitable for Indoor, Outdoor and Underground applications
- Low water absorption
- High abrasion and impact resistance
- Excellent self bonding properties
- Excellent sealing properties
- Shelf life: upto 40 months (under standard, ventilated storage condition)
- Voltage level: $U_0/U (U_m)$ 0.6/1 (1.2) kV

Application Area:

1. Power Cables
2. Control Cables
3. Instrumentation cables
4. Hazardous / Danger zone

Straight Through Joint:

Straight Through Joint - Selection Chart

Nominal Cross section per conductor (sq.mm.)								
		Unarmoured				With Concentric Conductor		Armoured
Product Code	Max Cable Ø mm	1 Core (Sq.mm)	3 Core (Sq.mm)	4 Core (Sq.mm)	5 Core (Sq.mm)	3 Core (Sq.mm)	4 Core (Sq.mm)	4 Core (Sq.mm)
AEX M11	26	50	10	10	6	10/10	–	4
AEX M12	34	150	25	25	16	25/25	16/16	10
AEX M13	43	400	50	50	35	50/50	25/16	35
AEX M14	48	630	95	95	70	95/95	50/50	70

Branch Joint:

Selection Chart

			Unarmoured						With Concentric Conductor	
Nominal Cross section per conductor (sq.mm.)										
Product Code	Max Cable Ø mm		3 Core (Sq.mm)		4 Core (Sq.mm)		5 Core (Sq.mm)		3 Core (Sq.mm)	
	Main Cable	Branch Cable	Main Cable	Branch Cable	Main Cable	Branch Cable	Main Cable	Branch Cable	Main Cable	Branch Cable
AEX Y0	17	17	6	6	6	6	6	6	6/6	6/6
AEX Y1	22	22	10	10	10	10	10	10	10/10	10/10
AEX Y2	34	30	25	25	25	25	25	25	16/16	10/10
AEX Y3	42	37	50	25	50	35	25	25	25/25	16/16