

Heat Shrink Medium and Heavy Wall Tube



AEX's Heat Shrink Medium Wall Tubing (AMT) and Heavy Wall Tubing (AHT) are made from thermally stabilised Cross-linked Polyolefin material that offers abiding service reliability in severe climatic conditions and in polluted environments.

By applying the heat, the tubing shrinks to the original smaller extruded diameter, fitting tightly over a wide range of Cable sizes and Cable accessories. The inside-coated Hot melt adhesive melts and flows throughout the shrinking process and gives a reliable moisture seal over even the most irregular shapes.

APPLICATION:

AMT Tubing:


- Designed for insulation on low-voltage cable accessories, as well as for environmental sealing and protection purposes on low and medium voltage cables and cable accessories.
- Widely used for environmental protection and core insulation of low-voltage Cable Termination, or insulating the connectors for low voltage Straight through Joints up to 3.3kV
- Ideal for many applications in electrical connections.

AHT Tubing:

- Designed for insulation on low-voltage cable accessories, as well as for environmental sealing, protection and outer jacketing on low, medium and high-voltage cables and cable accessories.
- Used as mechanical protection and outer jacketing of underground Straight through Cable Joints up to 36kV.

KEY FEATURES AND BENEFITS:

- Excellent electrical & mechanical characteristics
- 100% waterproof sealing as per IP 68
- Halogen-free & UV resistant
- Silicone-free material content
- Custom dimensions, length and thickness available
- Conforms to IEC 60684-3-247 standard
- Customized length possible
- Can be supplied with or without adhesive
- The product code shall remain the same also for the customized length/with or without adhesive
- 3:1 Shrink ratio

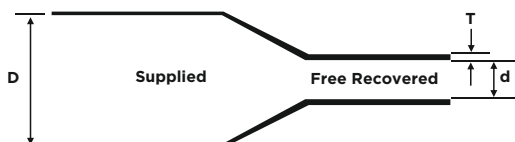

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	14 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.25% (max.)	ASTM D570
Density	0.8 - 1.2 gm/cm ³	ASTM D792
Longitudinal Change	+/- 10%	ASTM D2671
Hardness	45 +/- 10 Shore D	ASTM D2240
Thermal Ageing (150°C for 168 hrs.)		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Thermal Endurance	120° (min.)	IEC 60216
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹² Ohm.cm (min.)	ASTM D257
UV Resistance	No Cracking	ASTM G154

Product Dimensions

Code	D Min.	d Max.	T ±10%
AMT 10 / 3	10	3	1.5
AMT 12 / 4	12	4	1.8
AMT 16 / 5	16	5	2.0
AMT 19 / 6	19	6	2.0
AMT 22 / 6	22	6	2.4
AMT 30 / 8	30	8	2.6
AMT 33 / 10	33	10	2.7
AMT 40 / 12	40	12	2.7
AMT 50 / 16	50	16	2.7
AMT 70 / 22	70	22	2.7
AMT 95 / 25	95	25	3.0
AMT 105 / 30	105	30	3.2
AMT 115 / 34	115	34	3.2
AMT 130 / 36	130	36	3.2
AMT 140 / 42	140	42	3.2
AMT 160 / 50	160	50	3.3
AMT 180 / 55	180	55	3.3
AMT 200 / 60	200	60	3.5
AMT 250 / 70	250	70	3.5
AMT 320 / 90	320	90	3.5
AMT 375 / 110	375	110	3.5
AMT 425 / 120	425	120	3.5

Code	D Min.	d Max.	T ±10%
AHT 12 / 3	12	3	2.4
AHT 19 / 6	19	6	2.5
AHT 22 / 6	22	6	2.7
AHT 30 / 8	30	8	3.0
AHT 33 / 10	33	10	3.0
AHT 40 / 12	40	12	4.0
AHT 50 / 16	50	16	4.0
AHT 70 / 22	70	22	4.0
AHT 95 / 25	95	25	4.0
AHT 105 / 30	105	30	4.0
AHT 115 / 34	115	34	4.0
AHT 130 / 36	130	36	4.0
AHT 140 / 42	140	42	4.2
AHT 160 / 50	160	50	4.3
AHT 180 / 55	180	55	4.3
AHT 200 / 60	200	60	4.3
AHT 250 / 70	250	70	4.3
AHT 320 / 90	320	90	4.5
AHT 375 / 110	375	110	4.5
AHT 425 / 120	425	120	4.5

D - Dia. Supplied; d - Dia. Free Recovered; T - Thickness after Free Recovery; All dimensions are in mm