

Heat Shrink Red Insulation Tube



AEX's Heat Shrink Red Insulating Sleeve is used to insulate Cable Joints. These Sleeves provide Insulation enhancement and protection against flash-over and accidentally induced discharge.

The Red Insulation Sleeves can be used in Medium Voltage Cable Joints up to 36kV.


The Red Insulation Sleeves are made from thermally stabilised Non-tracking Cross-linked Polyolefin material that offers abiding service reliability. On application of heat, the Sleeve shrinks tightly over the Cable Joint, ensuring that the required minimum wall thickness is obtained.

PRODUCT TYPES:

- ART – Medium Wall Red Insulation Tube - The ART Sleeve provides flash-over protection up to 24 kV
- ARTH – Heavy Wall Red Insulation Tube - The ARTH Sleeve provides flash-over protection up to 36 kV

KEY FEATURES AND BENEFITS:

- High Di-electric strength
- Exceptional insulation and long-term reliability even at high continuous operating temperatures
- Excellent mechanical strength and impact resistance
- Halogen-free
- UV and weather-resistant
- Suitable for Indoor as well as Outdoor application
- Quick and easy to install. No special tools or skills needed.
- Smaller inventory possible as each Sleeve size will shrink to fit several different sizes
- Unlimited Shelf life

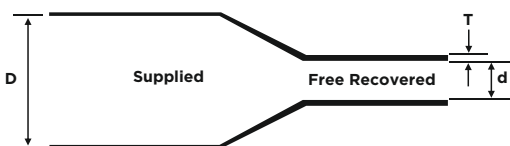

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	12 N/mm ² (Min.)	ASTM D638
Elongation	300% (Min.)	ASTM D368
Density	1.2 ±0.2 gm/cm ³	ASTM D792
Longitudinal Change	- 10% (Max.)	ASTM D2671
Water Absorption	0.5% (Max.)	ASTM D570
Hardness	45 ± 10 (Shore D)	ASTM D2240
Heat Shock (250° C for 30 min.)	No Cracking	ASTM D570
Accelerated Ageing	168Hrs. at 150°C	ASTM D2671
Tensile Strength	10 N/mm ² (Min.)	ASTM D638
Elongation	250% (Min.)	ASTM D638
Low Temp. Flexibility (-40°C for 4 Hrs.)	No Cracking	ASTM D2671
Shrink Temperature	125°C	IEC 216
Continuous Operating Temp.	-40°C to 105°C	IEC 216
Volume Resistance	1x10 ¹⁴ Ohm.cm (Min.)	ASTM D257
Di-electric Strength	22 kV/mm (Min.)	ASTM D149

Selection Chart

Product Code	Supplied I.D. (mm)	Recovered I.D. (mm)	Recovered Thick. (mm)	Length (Mtr.)
Upto 24 kV				
ARTM 15/6	15	6	2.0	25
ARTM 25/10	25	10	2.0	25
ARTM 30/12	30	12	2.2	25
ARTM 40/16	40	16	2.2	25
ARTM 50/20	50	20	2.4	25
ARTM 65/25	65	25	2.4	25
ARTM 75/28	75	28	2.4	25
ARTM 85/32	85	32	2.4	25
ARTM 100/38	100	38	2.4	15
ARTM 120/45	120	45	2.8	15
ARTM 150/60	150	60	2.8	15
ARTM 180/72	180	72	2.8	15
Upto 36 kV				
ARTH 15/6	15	6	3.6	25
ARTH 25/10	25	10	3.6	25
ARTH 30/12	30	12	3.6	25
ARTH 40/16	40	16	3.6	25
ARTH 50/20	50	20	3.6	25
ARTH 65/25	65	25	3.6	25
ARTH 75/28	75	28	3.6	15
ARTH 100/38	100	38	3.6	15
ARTH 120/45	120	45	3.6	15
ARTH 150/60	150	60	3.6	15
ARTH 150/60	150	60	3.8	15
ARTH 180/72	180	72	3.8	15