

Heat Shrinkable Anode Cap



AEX's Heat Shrink Anode caps are used for protecting the anode ends where the lead wire is connected to the anode. Protection of the connection between the anode and lead wire is important to prevent premature failure of the system typically caused by corrosion of the wire connection.

Anode Caps are made from thermally stabilised Cross-linked Polyolefin material.

The anode cap provides electrical insulation, moisture proofing and stress relief at the lead wire exit point. The special butyl-based mastic coating on the inside of the anode cap provides a water-tight seal according to IP68 and protects the anode end from moisture.

The anode cap provides electrical insulation, moisture proofing and stress relief at the lead wire exit point. The special butyl-based mastic coating on the inside of the anode cap provides a water-tight seal according to IP68 and protects the anode end from moisture.


KEY FEATURES AND BENEFITS:

- 100% waterproof sealing as per IP 68 against moisture and environmental contaminants
- Resistant to corrosion, abrasion, weathering, atmospheric pollution and aggressive chemical agents.
- UV resistant
- Halogen free
- Quick and easy to install
- Wide range of shrinkage
- Unlimited Shelf life

Product Dimensions

Product Code	Supplied Dia. (Min.)		Free Recovered Dia. (Max.)		Supplied Length (Min.)		Free Recovered (Min.)		Free Recovered Thick.(±10%)	
	Ds	ds	Df	df	Ls	ls	Lf	lf	Tf	tf
AAC 0420	41	13	20	4.5	55	65	65	70	3.5	2.5
AAC 0420A	50	14	20	4.5	55	60	63	70	3.5	2.5
AAC 0540	82	16	40	5.0	85	65	116	64	4.7	3.7
AAC 0540A	108	16	40	5.0	80	60	116	64	4.8	3.8
AAC 0550S	108	20	50	5.5	90	90	140	110	4.7	3.9
AAC 0550	145	20	50	5.5	90	85	140	110	4.7	3.9

D, d - Internal Diameter; S - Supplied; f - Free Recovered; T,t - Thickness

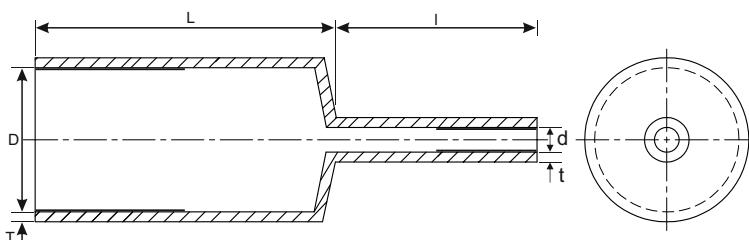

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.20% (max.)	ASTM D570
Density	1.00 ±0.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility (-40°C for 4 hrs.)	No Cracking	ASTM G154
Thermal Ageing 150°C for 168 hrs.		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁴ Ohm.cm (min.)	ASTM D257
Di-electric Constant	5 (max.)	ASTM D150

