

Heat Shrinkable Non-tracking Cable Breakouts



AEX's Heat Shrink Non-Tracking Cable Breakouts are used to insulate and seal the crutches of 3 core Plastic and PILC Cables up to 36kV.

The Breakouts are made from thermally stabilised Cross-linked halogen-free Polyolefin material that offers abiding service reliability.

By applying the heat on the breakout, the diameter reduces to tightly grip the outer jacket and the cores of the Cable. The inside-coated Red Mastic melts and flows throughout the shrinking process, creating a reliable waterproof and environmental seal at the cable crutch area.

KEY FEATURES AND BENEFITS:


- Can be fitted over all types of Cables
- Strain relief and mechanical protection
- Resistant to Tracking & Erosion, abrasion, weathering, atmospheric pollution and aggressive chemical agents.
- Excellent electrical performance with high mechanical strength and impact resistance
- Pressure-tight
- Halogen-free
- UV resistant
- Suitable for Indoor as well as Outdoor application
- Quick and easy to install. No special tools or skills needed
- Smaller inventory possible as each Breakout size will shrink to fit several different sizes and types of Cables
- Unlimited Shelf life

Product Dimensions

Product Code	No. of Cores	D		d		L		I		Thickness	
		Ds	Df	ds	df	Ls	Lf	Is	If	TB	TC
		Min.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	±10%	±10%
ANB 2008	3	60	20	25	8	160	188	45	60	3.7	2.7
ANB 2008A	3	70	20	27	8	155	188	40	60	3.7	2.7
ANB 3013	3	80	30	39	13	185	215	60	75	3.6	3.3
ANB 3013A	3	100	30	39	13	185	215	60	75	3.6	3.3
ANB 4521	3	110	45	55	21	200	230	70	88	3.5	2.9
ANB 4521A	3	125	45	55	21	190	230	65	88	3.5	2.9
ANB 5527	3	140	56	68	28	215	260	80	90	4.0	3.5
ANB 5527A	3	180	58	68	29	200	260	75	90	4.0	3.5
ANB 6030	3	200	60	70	30	190	250	70	85	4.0	3.5

D,d: Internal Diameter; s : as supplied; f: After free recovery; TB, TC: Thickness of Body & Core

All dimensions are in mm

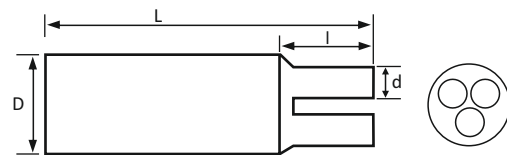

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.00 ±0.2 gm/cm ³	ASTM D792
Hardness	43 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility (-40°C for 4 hrs.)	No Cracking	ASTM G154
Thermal Ageing (150°C for 168 hrs.)		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁴ Ohm.cm (min.)	ASTM D257
Di-electric Constant	5 (max.)	ASTM D150
Resistance to Tracking & Erosion	No Tracking, Erosion or Flame failure upto 3.25 kV for 20 min.	ASTM D2303