


Heat Shrinkable Right Angle and Straight Boots

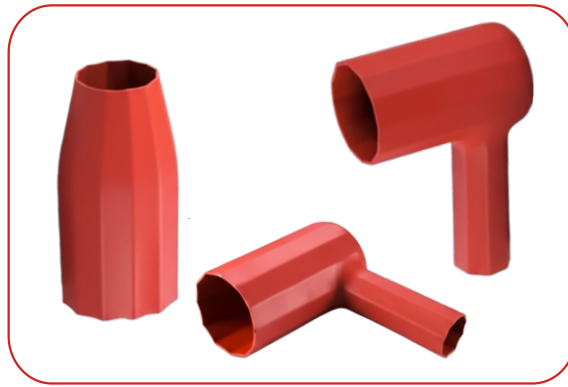


AEX's Heat Shrink Right Angle and Straight Boots fit over the connection between a Termination's cable lug and an equipment bushing, to provide phase-to-phase and phase-to-ground insulation.

They are used in Switchgear and Transformer Cable boxes up to 36kV, particularly where air clearances are not sufficient for normal operation, and they also protect against flash-overs in the event of any surge impulse, high humidity, or rodent menace contact.

The boots are made from thermally stabilized Non-tracking Cross-linked material for excellent insulation and weather-resistant properties. The boots are internally coated with water-resistant red mastic.


KEY FEATURES AND BENEFITS:

- High-performance insulation material
- Excellent track and erosion resistance
- Excellent performance in areas of high humidity and electrical stress.
- Resistant to abrasion, weathering, atmospheric pollution and aggressive chemical agents.
- UV resistant
- Halogen-free
- UV resistant
- Quick and easy to install.
- Unlimited Shelf life

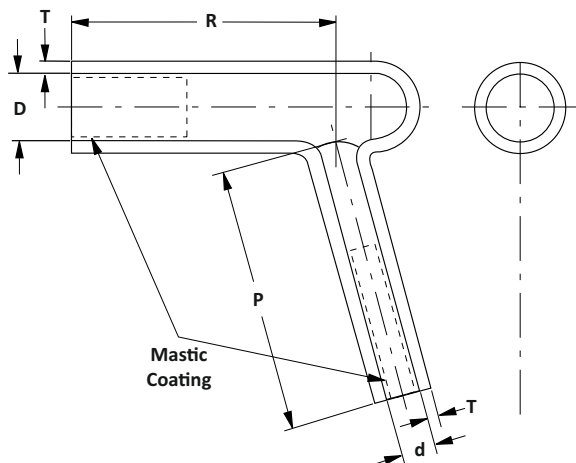

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.10 ±0.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility (-40°C for 4 hrs.)	No Cracking	ASTM G154
Thermal Ageing (150°C for 168 hrs.)		
Tensile Strength	11 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁴ Ohm.cm (min.)	ASTM D257
Di-electric Constant	5 (max.)	ASTM D150
Resistance to Tracking & Erosion	No Tracking, Erosion or Flame failure upto 3.25 kV for 20 min.	ASTM D2303

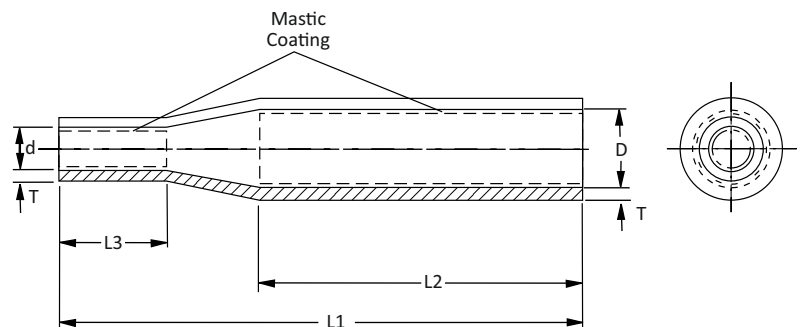

Product Dimensions

Product Code	D		d		P		R	T
	Ds	Df	ds	df	f	f		
	Min.	Max.	Min.	Max.	Min.	Min.		
ARB - 1	78	35	34	16	160	130	4.0	
ARB - 2	78	37	52	27	170	140	4.5	
ARB - 2A	90	37	67	27	170	140	4.5	
ARB - 3	145	72	67	34	170	150	4.5	

Product Dimensions

Product Code	D		d		L1	L2	L3	T
	Ds	Df	ds	df	f	f	f	f
	Min.	Max.	Min.	Max.	Min.	Min.	Min.	±10%
ASB - 1	80	34	34	21	225	140	30	3.6
ASB - 2	80	35	57	22	225	140	30	3.6
ASB - 2A	100	36	57	22	225	140	30	3.6
ASB - 3	140	65	90	33	250	155	40	4.0

D,d: Internal Diameter; s : as supplied; f: After free recovery; T: Thickness of Body & Core All dimensions are in mm