

Heat Shrinkable Semi-Conductive Cable Breakouts



AEX's Heat Shrink Semi-conductive Cable Breakouts provide a semi-conductive screening to each core and seal over the crutch of multi-core cables. The Semi Conductive Breakouts are ideal for PILC Joints and Termination.

The conductive cable breakouts are normally used as an integral part of 3-core Cable Terminations up to 36 kV and in 3-core Cable Joints up to 36 kV.

These are made from thermally stabilised Cross-linked Semi-conductive Polyolefin. The most important additive is conductive carbon black, which adds electrical conductivity to the material. The breakouts are internally coated with butyl rubber-based mastic which is electrical insulating and waterproof as per IP 68.


KEY FEATURES AND BENEFITS:

- Excellent electrical performance with high mechanical strength and impact resistance
- UV and weather-resistant
- Resistant to common fluids and solvents
- Halogen-free
- Suitable for Indoor as well as Outdoor application
- Quick and easy to install. No special tools or skills needed.
- Unlimited Shelf life

Product Dimensions

Product Code	No. of Cores	D		d		L		I		Thickness	
		Ds	Df	ds	df	Ls	Lf	Is	If	TB	TC
		Min.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	±10%	±10%
A3CB 2008	3	55	20	25	8	160	188	52	60	3.3	2.7
A3CB 3013	3	80	30	36	13	185	215	60	75	3.6	3.3
A3CB 4521	3	110	45	55	21	200	230	70	85	3.5	2.9
A3CB 5527	3	140	56	68	28	215	260	75	90	4.0	3.5

D,d: Internal Diameter; s : as supplied; f: After free recovery; TB, TC: Thickness of Body & Core
All dimensions are in mm

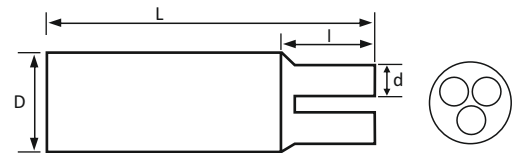

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.10 ±0.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility(-40°C for 4 hrs.)	No Cracking	ASTM G154
Thermal Ageing (150°C for 168 hrs.)		
Tensile Strength	11 N/mm ² (min.)	ASTM D638
Elongation	250% (min.)	ASTM D638
Continuous Operating Temperature	-40° to +100° C	IEC 216
Volume Resistivity	1x10 ⁷ Ohm.cm (max.)	ASTM D257