


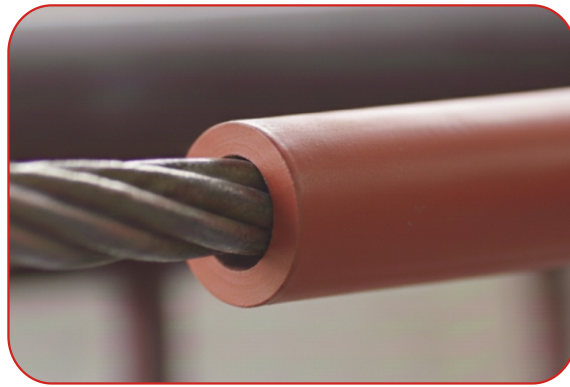

AEX offers Medium Voltage Line Tubes (AMVLT), a cutting-edge solution designed to prevent electrical outages caused by trees or wildlife coming into contact with distribution lines. Our AMVLTs are engineered to insulate the uninstalled / fresh Overhead Conductors.

The Medium Voltage Overhead Line Tubes are made from thermally stabilised UV resistant Non-tracking Cross-linked Polyolefin material that offers abiding service reliability.

Compliant with REACH and RoHS standards, our AMVLT demonstrates our commitment to environmental sustainability and regulatory compliance.

KEY FEATURES AND BENEFITS:

- High Dielectric strength.
- Exceptional insulation and long-term reliability even at high continuous operating temperatures
- Excellent mechanical strength and impact resistance
- Flame retardant and Halogen-free.
- UV and weather-resistant.
- Tracking resistance in compliance with IEC 112
- Quick and easy to install. No special tools or skills needed
- Unlimited Shelf life
- Conforms to specifications: IEC 60684-3 / ENATS 09-13, RoHS 2011/65/EU & 2015/863/EU Compliant

Selection Chart

Product Code	Conductor Dia. Upto (mm)	Voltage Class kV	Spool Length (Mtr.) (Min.)
AMVLT-1 M	17	15	25
AMVLT-2 M	24	15	25
AMVLT-3 M	34	15	25
AMVLT-1 H	17	36	25
AMVLT-2 H	24	36	25
AMVLT-3 H	34	36	25

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	8 MPa (Min.)	ASTM D638
Elongation	200% (Min.)	ASTM D638
Abrasion Resistance	20% Max. Thickness loss	1000 Cycles, 2068g
Low Temp. Impact (-40°C for 4 hrs)	No Cracking at -20°C	ASTM D746
Di-electric Strength at 1.27mm	217 kV/cm. (min.)	ASTM D149
AC Dry Withstand / 1 Min.	15 / 36 kV (min.)	ASTM D149
Tracking and Erosion Resistance (initiate at 2.5 kV)	No Tracking or Erosion to top surface or flame failure after 200 minutes	ASTM D2303