# TEST REPORT



| | | | |
|---|---|---|---|
| **Applicant**<br>Name:<br>Address: | YIWU FANGQING IMPORT AND EXPORT CO.,LIMITED<br>China | | |
| **Sample**<br>Name:<br>Type:<br>Model:<br>Brand:<br>Ratings:<br>Manufacturer:<br>Address:<br>Amount:<br>Date Received:<br>State Received: | Table Clocks<br>/<br>2508-01<br>CBH<br>DC3V;3W<br>YIWU FANGQING IMPORT AND EXPORT CO.,LIMITED<br>YIWU, CHINA<br>One sample<br>Mar. 14, 2026<br>The sample is suitable for the test | | |
| **Test Date** | Mar. 14, 2026 - Mar. 20, 2026 | | |
| **Issue Date** | Mar. 20, 2026 | Test Location | Mawei lab |
| **Test Specification** | EN IEC 61000-3-2:2019+A1:2021<br>EN 61000-3-3: 2013+A2:2021<br>EN IEC 55014-1:2021<br>EN IEC 55014-2:2021 | | |
| **Test Results** | Refer to page 2-23 | | |
| **Conclusion** | The tested items meet the requirements of standards above. | | |
| **Note** | 1. Sign " N/A " means that the request is inapplicable to that product, or don't carry on that experiment.<br>2. Sign " P " means that test item does meet the requirement | | |

**This report shall not be reproduced except in full with the written approval of FQII**

**Approved by:** 吴启震 **Checked by:** 王一宁 **Tested by:** 黄碧霞

**(signature)** **(signature)** **(signature)**

## Photo of the sample



Picture 1 View of Table Clocks

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Table Clocks
Brand:CBH
model:2508-01
Rating:DC3V;3W
YIWU FANGQING IMPORT AND EXPORT CO.,LIMITED
MADE IN CHINA

- This is a representative label, the other models are identical to it except for the model name.

# TEST REPORT



| | |
|---|---|
| **POSSIBLE TEST CASE VERDICTS:** | |
| - test case d es not apply to the test object..... : | N/A |
| - test o ject does meet the requirement ..... : | P (Pass) |
| - te t object does not meet the requirement ..... : | F (Fail) |
| **TESTING:** | |
| Date of receipt of test item..... : | 2026-03-14 |
| Date (s) of performance of tests..... : | 2026-03-14 to 2026-03-20 |
| | |

**GENERAL REMARKS:**

**"(See Enclosure #)" refers to additional information appended to the report.**
**"(See appended table)" refers to a table appended to the report.**

**Throughout this report a ☐ comma / ☒ point is used as the decimal separator.**

## STAND OF CONTENTS

GENERAL INFORMATION....4
Product Description for Equipment Under Test (EUT)....4
Objective....4
1 - EN IEC61000-3-2....4
1.1 Test Equipment List and Details....4
1.2 Description of Measurement Conditions....4
1.3 Configuration....5
1.4 Test Data and Records....6
1.5 Verdict....7
2.1 Test Equipment List and Details....8
2.2 Description of Measurement Conditions....8
2.3 Configuration....8
2.4 Test Data and Records....8
2.5 Verdict....8
3 - EN IEC55014-1....9
3.1 Continuous Disturbance Voltage at Mains Terminal....9
3.1.1 Test Equipment List and Details....9
3.1.2 Description of Measurement Conditions....9
3.1.3 Limits of Continuous Disturbance Voltage at Mains Terminal....9
3.1.4 Configuration....10
3.1.5 Test Data and Records....10
3.1.6 Verdict....11
3.2 Radiation Electromagnetic Disturbances....11
3.2.1 Test Equipment List and Details....11
3.2.2 Description of Measurement Conditions....11
3.2.3 Limits of radiation electromagnetic disturbances....11
3.2.4 Configuration....13
3.2.5 Test Data and Records....13
3.3 Radiated Electromagnetic Disturbances....13
3.3.1 Test Equipment List and Details....13
3.3.2 Description of Measurement Conditions....13
3.3.3 Limits of radiated disturbances at a measuring distance of 3m....14
3.3.4 Test procedure and the test set-up....14
3.3.6 Verdict....16
4 –EN IEC55014-2....17
Performance Criterion A....17
Performance Criterion B....17
Performance Criterion C....17
4.1 SURGES....18
4.1.1 Test Equipment List and Details....18
4.1.2 Description of Measurement Conditions....18
4.1.3 Configuration....18
4.1.4 Test Data and Records....18
4.1.5 Verdict....19
4.2 ESD....20
4.2.1 Test Equipment List and Details....20
4.2.2 Description of Measurement Conditions....20

4.2.4 Test Data and Records ....20
4.2.5 Verdict ....20
4.3 EFT/B ....21
4.3.1 Test Equipment List and Details ....21
4.3.2 Description of Measurement Conditions ....21
4.3.3 Configuration ....21
4.3.4 Test Data and Records ....21
4.3.5 Verdict ....21
4.4 INJECTED CURRENTS ....22
4.4.1 Test Equipment List and Details ....22
4.4.2 Description of Measurement Conditions ....22
4.4.3 Configuration ....22
4.4.4 Test Data and Records ....22
4.4.5 Verdict ....22
4.5 VOLTAGE DIPS AND INTERRUPTIONS ....23
4.5.1 Test Equipment List and Details ....23
4.5.2 Description of Measurement Conditions ....23
4.5.3 Configuration ....23
4.5.4 Test Data and Records ....23
4.5.5 Verdict ....23
4.6 Radio-frequency electromagnetic field ....24
4.6.1 Test Equipment List and Details ....24
4.6.2 Description of Measurement Conditions ....24
4.6.3 Configuration ....24
4.6.5 Verdict ....25
4.7 Power-frequency magnetic field ....25
4.7.1 Test Equipment List and Details ....25
4.7.2 Description of Measurement Conditions ....25
4.7.3 Configuration ....25
4.7.4 Test Data and Records ....26
4.7.5 Verdict ....26
**APPENDIX A —SAMPLE PHOTOGRAPH ....27**

**APPENDIX A—SAMPLE PHOTOGRAPH ....22-24**

## GENERAL INFORMATION

**Product Description for Equipment Under Test (EUT)**

**Objective**

In order to meet the EMC requirements approved by CENELEC, the following standards will be cited:

1. EN IEC 61000-3-2:2019+A1:2021, EMC-Limits-Limits for the harmonic current emissions (equipment input current up to and including 16 A perphase).

2. EN61000-3-3: 2021,EMC-Limits-Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤16 A per phase and not subject to conditional connection.

3. EN IEC 55014-1:2021 Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

4. EN IEC 55014-2: 2021 Requirements for household appliances, electric tools and similar apparatus - Part 2: Immunity - Product family standard

**Note**: The test data is only valid for the test sample. There is possible deviation from the original test data for other products

## 1 - EN IEC 61000-3-2

### 1.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| EMC-PARTNER | Harmonics and Flicker Analyzer | HARMONIC S-1000 | HAR1000-40 | 2026.2 | 2 Year |

### 1.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar

### 1.3 Configuration

The configuration is in accordance with the requirement in EN61000-3-2 Class C Limits.

### 1.4 Test Data and Records

**SRS-4 model 1**

| Order | Freq. [Hz] | Iavg [A] | Iavg%L [%] | Imax [A] | Imax%L [%] | Limit [A] | Status |
|---|---|---|---|---|---|---|---|
| 2 | 100 | 0.0000 | | 0.0002 | | | |
| 3 | 150 | 0.0535 | 95.87 | 0.0543 | 98.882 | 0.0549 | |
| 4 | 200 | 0.0000 | | 0.0002 | | | |
| 5 | 250 | 0.0313 | 84.65 | 0.0333 | 85.572 | 0.0389 | |
| 6 | 300 | 0.0000 | | 0.0002 | | | |
| 7 | 350 | 0.0153 | | 0.0173 | | | |
| 8 | 400 | 0.0000 | | 0.0002 | | | |
| 9 | 450 | 0.0126 | | 0.0139 | | | |
| 10 | 500 | 0.0000 | | 0.0002 | | | |
| 11 | 550 | 0.0115 | | 0.0129 | | | |
| 12 | 600 | 0.0000 | | 0.0002 | | | |
| 13 | 650 | 0.0096 | | 0.0096 | | | |
| 14 | 700 | 0.0000 | | 0.0002 | | | |
| 15 | 750 | 0.0063 | | 0.0080 | | | |
| 16 | 800 | 0.0000 | | 0.0002 | | | |
| 17 | 850 | 0.0057 | | 0.0076 | | | |
| 18 | 900 | 0.0000 | | 0.0002 | | | |
| 19 | 950 | 0.0043 | | 0.0064 | | | |
| 20 | 1000 | 0.0000 | | 0.0002 | | | |
| 21 | 1050 | 0.0036 | | 0.0055 | | | |
| 22 | 1100 | 0.0000 | | 0.0002 | | | |
| 23 | 1150 | 0.0038 | | 0.0053 | | | |
| 24 | 1200 | 0.0000 | | 0.0002 | | | |
| 25 | 1250 | 0.0000 | | 0.0048 | | | |
| 26 | 1300 | 0.0000 | | 0.0002 | | | |
| 27 | 1350 | 0.0000 | | 0.0042 | | | |
| 28 | 1400 | 0.0000 | | 0.0002 | | | |
| 29 | 1450 | 0.0000 | | 0.0040 | | | |
| 30 | 1500 | 0.0000 | | 0.0002 | | | |
| 31 | 1550 | 0.0000 | | 0.0037 | | | |
| 32 | 1600 | 0.0000 | | 0.0002 | | | |
| 33 | 1650 | 0.0000 | | 0.0034 | | | |
| 34 | 1700 | 0.0000 | | 0.0002 | | | |
| 35 | 1750 | 0.0000 | | 0.0032 | | | |
| 36 | 1800 | 0.0000 | | 0.0002 | | | |
| 37 | 1850 | 0.0000 | | 0.0030 | | | |
| 38 | 1900 | 0.0000 | | 0.0002 | | | |
| 39 | 1950 | 0.0000 | | 0.0028 | | | |
| 40 | 2000 | 0.0000 | | 0.0002 | | | |

Result: PASSED

The EUT met the requirement.

## 2 - EN IEC 61000-3-3

### 2.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| EMC-PARTNER | Harmonics and Flicker Analyzer | HARMONIC S-1000 | HAR1000-40 | 2026.2 | 2Year |

### 2.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

### 2.3 Configuration

The configuration is in accordance with the requirement in EN61000-3-3.

### 2.4 Test Data and Records

**Passed**

### 2.5 Verdict

The EUT met the requirement.

## 3 - EN IEC 55014-1

## Continuous Disturbance Voltage at Mains Terminal.

### 3.1.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Albatross Projects GmbH | Shield Room | Site 1 | --- | 2026.2 | 2 Year |
| R&S | EMI Test Receiver | ESU40 | 1302 | 2026.2 | 2 Year |
| R&S | Artificial Mains（Two Line） | ENV216 | 3560 | 2026.2 | 2 Year |
| R&S | EMI Test System Cabinet | --- | --- | N/A | N/A |
| R&S | EMI Test Software | EMC32 | --- | N/A | N/A |

### 3.1.2 Description of Measurement Conditions

.


Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

### 3.1.3 Limits of Continuous Disturbance Voltage at Mains Terminal.

| Equipment type | Frequency range MHz | Limit values dBμV | |
|---|---|---|---|
| | | Quasi-peak | Average |
| Switching Power Supply | 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| | 0.50 -5.0 | 53.00 | 44.00 |
| | 5.0 -30.0 | 62.00 | 52.00 |
| * At the transition frequency, the lower limit applies.<br>** Decreasing linearly with logarithm of the frequency.<br>***The limit decreases linearly with the logarithm of the frequency in the ranges 150kHz to 30MHz | | | |


### 3.1.4 Configuration

The configuration is in accordance with the requirement in EN55014, the sketch map as follow:

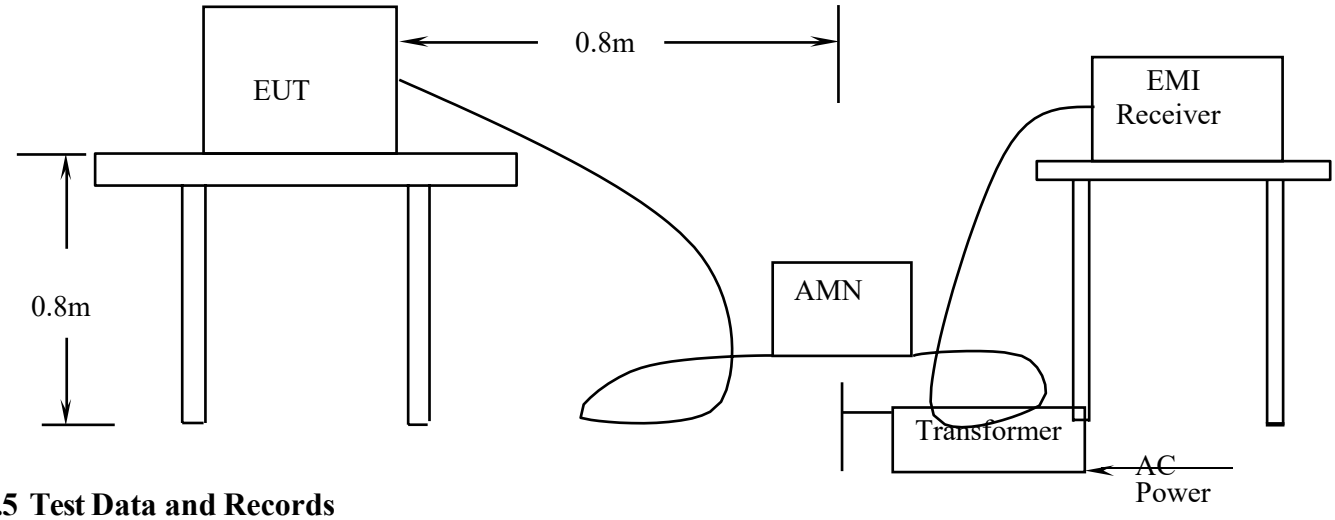


### 3.1.5 Test Data and Records

**Passed**

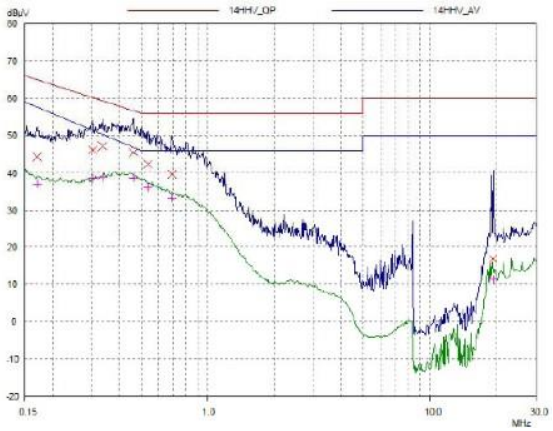


| Frequency (MHz) | Quasi-peak | | Average | |
|---|---|---|---|---|
| | Disturbance level dB(µV) | Permitted limit dB(µV) | Disturbance level dB(µV) | Permitted limit dB(µV) |
| 0.1600 | * | 65.46 | * | 58.30 |
| 0.2400 | * | 62.10 | * | 53.93 |
| 0.5500 | * | 56.00 | * | 46.00 |
| 1.0000 | * | 56.00 | * | 46.00 |
| 1.4000 | * | 56.00 | * | 46.00 |
| 2.0000 | * | 56.00 | * | 46.00 |
| 3.5000 | * | 56.00 | * | 46.00 |
| 6.0000 | * | 60.00 | * | 50.00 |
| 10.0000 | * | 60.00 | * | 50.00 |
| 22.0000 | * | 60.00 | * | 50.00 |
| 30.0000 | * | 60.00 | * | 50.00 |

Note: * means the emission level 20dB below the relevant limit.

| | | | |
|---|---|---|---|
| 150kHz to 3,0MHz | 58 to 22** | 51 to 15** | 45 to 9** |
| 3,0MHz to 30MHz | 22 | 15 to 16*** | 9 to 12*** |
| NOTE* At the transition frequency, the lower limit applies.<br>NOTE** Deceasing linearly with the logarithm of the frequency.<br>NOTE*** Increasing linearly with the logarithm of the frequency. | | | |

### 3.1.6 Verdict

The EUT met the requirement.

## 3.2 Radiation Electromagnetic Disturbances

### 3.2.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| AFJ | EMI Receiver | ER55 CR/2.8 | 55790015165 | 2026.2 | 2 Year |
| AFJ | Loop antenna | TLA-300＋TLA-CAL | 9005 | 2026.2 | 2 Year |


### 3.2.2 Description of Measurement Conditions

Temperature: 20℃
Humidity: 60%
Pressure: 1033mbar
Electromagnetic environment: normal

### 3.2.3 Limits of radiation electromagnetic disturbances

| Frequency range | Limits for loop diameter dB(μA)* | | |
|---|---|---|---|
| | 2m | 3m | 4m |
| 9kHz to 70kHz | 88 | 81 | 75 |
| 70kHz to 150kHz | 88 to 58** | 81 to 51** | 75 to 45** |
| 150kHz to 3,0MHz | 58 to 22** | 51 to 15** | 45 to 9** |
| 3,0MHz to 30MHz | 22 | 15 to 16*** | 9 to 12*** |
| NOTE* At the transition frequency, the lower limit applies.<br>NOTE** Deceasing linearly with the logarithm of the frequency.<br>NOTE*** Increasing linearly with the logarithm of the frequency. | | | |

### 3.2.4 Configuration

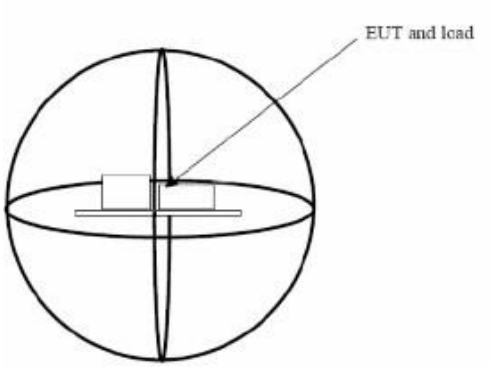


### 3.2.5 Test Data and Records

**Passed**

### 3.2.6 Verdict

**The EUT met the requirement.**

## 3.3 Radiated Electromagnetic Disturbances

### 3.3.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Albatross Projects GmbH | Anechoic Chamber | --- | 9290832 | 2026.2 | 2 Year |
| R&S | Ultra-broadband Antennas | HL562 | --- | 2026.2 | 2 Year |
| Inn-co GmbH | Antenna Towers | --- | --- | N/A | N/A |
| R&S | EMI Test Receiver | ESU40 | 1302 | 2026.2 | 2 Year |
| Inn-co GmbH | Turntable | DS2000S-1t | | N/A | N/A |
| Inn-co GmbH | Controller | CO 2000 | 10806L | N/A | N/A |
| R&S | EMI Test Software | EMC32 | --- | N/A | N/A |
| R&S | EMI Test System Cabinet | --- | --- | N/A | N/A |

### 3.3.2 Description of Measurement Conditions

Temperature: 20℃
Humidity: 60%
Pressure: 1033mbar
Electromagnetic environment: normal

### 3.3.3 Limits of radiated disturbances at a measuring distance of 3m.

| Frequency range MHz | At 10m Quasi-peak limits dB(μV/m) | At 3m Quasi-peak limits dB(μV/m) |
|---|---|---|
| 30 to 230 | 30 | 40 |
| 230 to 1000 | 37 | 47 |
| NOTE: The lower limit shall apply at the transition frequency.<br>NOTE: Additional provisions may be required for cases where interference occurs. | | |


### 3.3.4 Test procedure and the test set-up

**Procedure**

a. The EUT was placed on the top of a rotating Stand0.8 meters above the ground at a 3m semi/full-anechoic chamber. The Standwas rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn Standwas turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.


**Set-up**


The configuration is in accordance with the requirement in EN61000-6-3, the sketch map as follow:

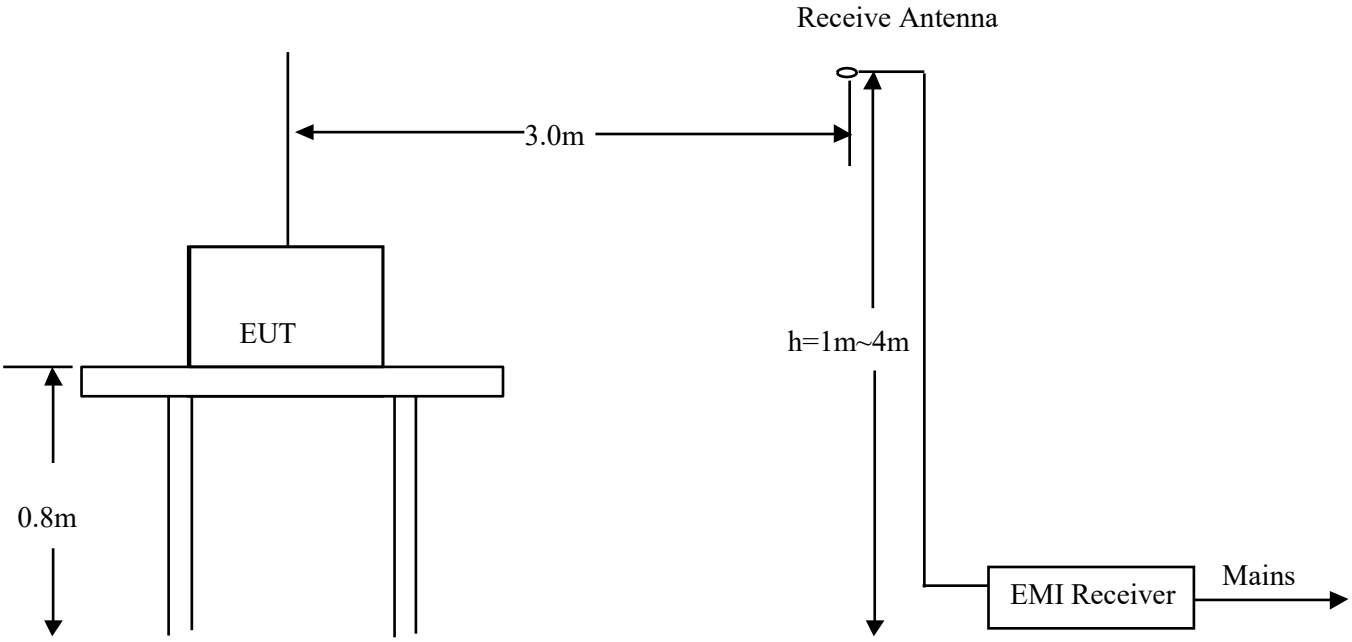


**3.3.5 Test Data and Records**

**Passed**

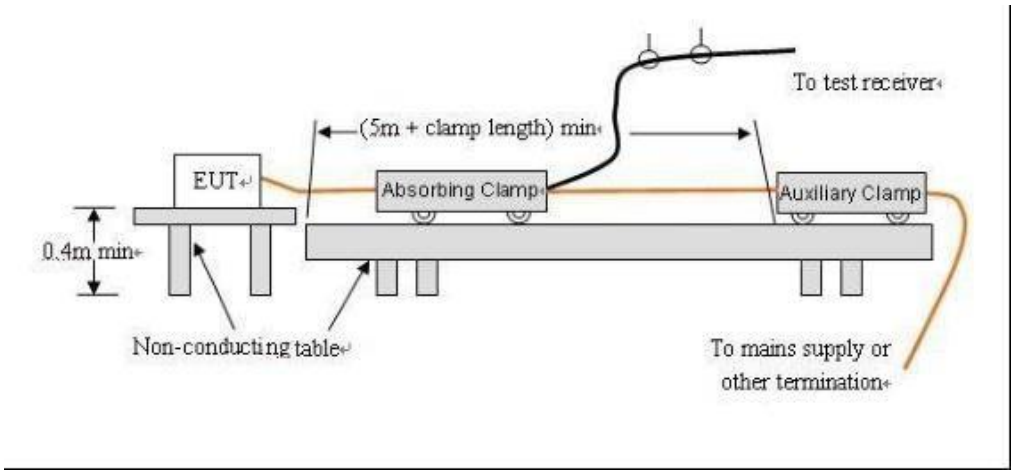

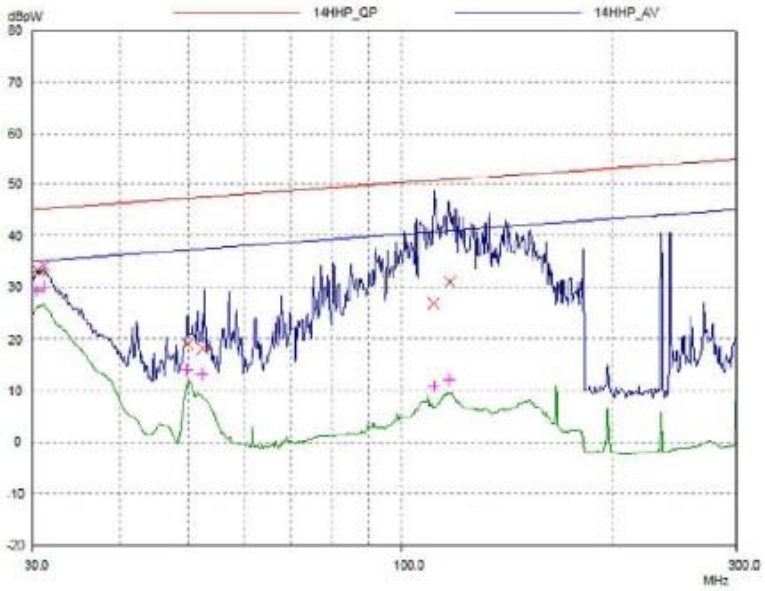


Final Measurement Results

| Frequency MHz | QP Level dBpW | QP Limit dBpW | QP Delta dB |
|---|---|---|---|
| 30.48288 | 33.37 | 45.07 | 11.70 |
| 31.09744 | 34.02 | 45.16 | 11.14 |
| 49.80842 | 19.07 | 47.20 | 28.13 |
| 52.25253 | 18.19 | 47.41 | 29.22 |
| 111.56109 | 26.89 | 50.70 | 23.81 |
| 117.50356 | 30.92 | 50.93 | 20.01 |

### 3.3.6 Verdict

The EUT met the requirement.

**Description of Performance Criterion**

**Performance Criterion A**

During the test no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

**Performance Criterion B**

During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min.
Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

**Performance Criterion C**

During and after the test any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control.
Additional requirement for lighting equipment incorporating a starting device:
After the test the lighting equipment is switched off. After half an hour it is switched on again. The lighting equipment shall start and operate as intended.

## 4.1 SURGES


### 4.1.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Noise Laboratory CO., LTD | Surge Lite | LSS-6030 | 9099E00350 | 2026.2 | 2 Year |

### 4.1.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

### 4.1.3 Configuration

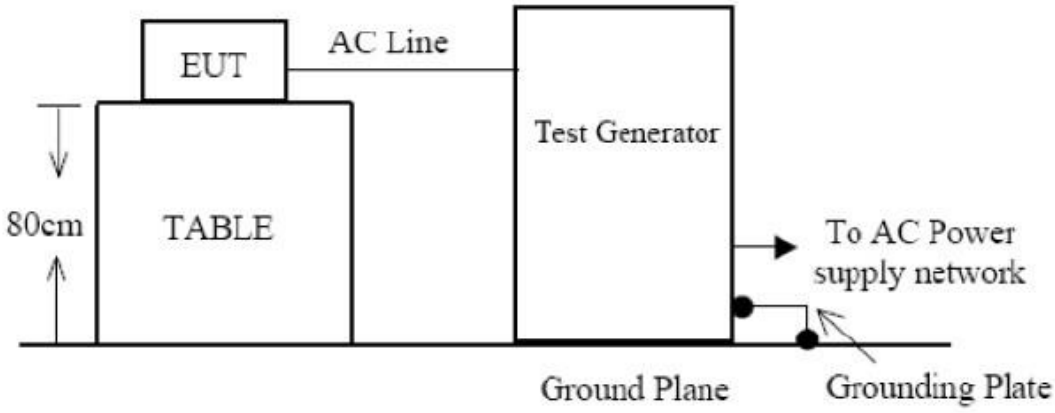


Remark: Test generator includes control center、surge combination and coupler.

### 4.1.4 Test Data and Records

| Level | Voltage | Poll | Phase angle | Path | Pass | Fail |
|---|---|---|---|---|---|---|
| 1 | **1.0kV** | ± | 0°, 90°, 180°, 270°, | L-N | **B** | |
| 2 | **2.0kV** | ± | 0°, 90°, 180°, 270°, | L-PE N-PE | **B** | |

### 4.1.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria B.

## 4.2 ESD

### 4.2.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Shanghai Sanki | Electrostatic Discharge tester | ESD-320 | 0329501C | 2026.2 | 2 Year |

### 4.2.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

### 4.2.3 Configuration

The configuration is in accordance with the requirement in EN61000-4-2, see the photo in appendix.

### 4.2.4 Test Data and Records

**Passed**

### 4.2.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria B.

## 4.3 EFT/B

### 4.3.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Shanghai Sanki | E.F.TB Generator | 8014 | 069504E | 2026.2 | 2 Year |

### 4.3.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

**Photograph Document**

## 4.4 INJECTED CURRENTS


### 4.4.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Giga-tronics | Synthesized RF Signal Generator | 6061A | 5130304 | 2026.2 | 2 Year |
| QF | Broadband Power Amplifier | QF3860 | --- | 2026.2 | 2 Year |
| QF | Millivoltmeter | QF2281 | 92028 | 2026.2 | 2 Year |

### 4.4.2 Description of Measurement Conditions

Temperature: 22℃
Humidity: 59%
Pressure: 1033mbar
Electromagnetic environment: normal

### 4.4.3 Configuration

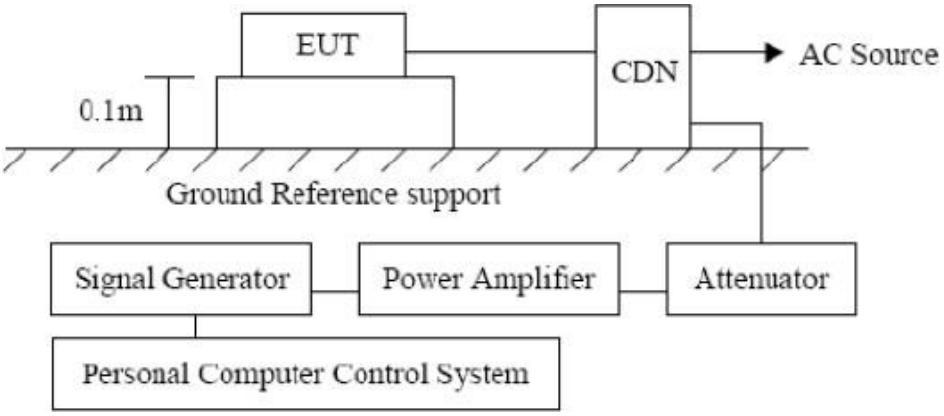


### 4.4.4 Test Data and Records

**Passed**

### 4.4.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria A.

## 4.5 VOLTAGE DIPS AND INTERRUPTIONS


### 4.5.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| Noise Laboratory CO., LTD | Voltage Dip Simulator | VDS-220B | 2199D00098 | 2026.2 | 2 Year |

### 4.5.2 Description of Measurement Conditions

Temperature: 21℃
Humidity: 58%
Pressure: 1033mbar
Electromagnetic environment: normal

### 4.5.3 Configuration

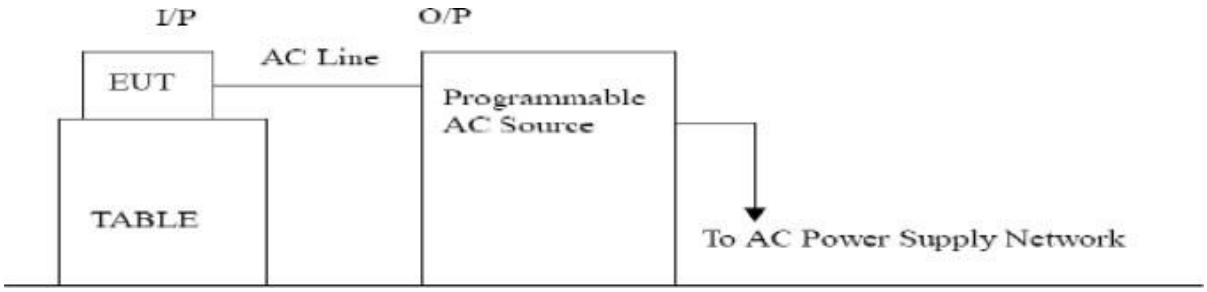


### 4.5.4 Test Data and Records

**Passed**

.


### 4.5.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria C.

### 4.6 Radio-frequency electromagnetic field

#### 4.6.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Period |
|---|---|---|---|---|---|
| R&S | Signal Generator | SMR-40 | 1104 | 2026.2 | 2 Year |
| QF | Broadband Power Amplifier | QF3860 | --- | 2026.2 | 2 Year |
| QF | Millivoltmeter | QF2281 | 92028 | 2026.2 | 2 Year |
| Albatross Projects GmbH | Anechoic Chamber | --- | 9290832 | 2026.2 | 2 Year |
| R&S | Ultra-broadband Antennas | HL562 | --- | 2026.2 | 2 Year |
| Inn-co GmbH | Antenna Towers | --- | --- | N/A | N/A |
| Inn-co GmbH | Turntable | DS2000S-1t | --- | N/A | N/A |
| Inn-co GmbH | Controller | CO 2000 | 10806L | N/A | N/A |
| R&S | EMI Test Software | EMC32 | --- | N/A | N/A |
| R&S | EMI Test System Cabinet | --- | --- | N/A | N/A |

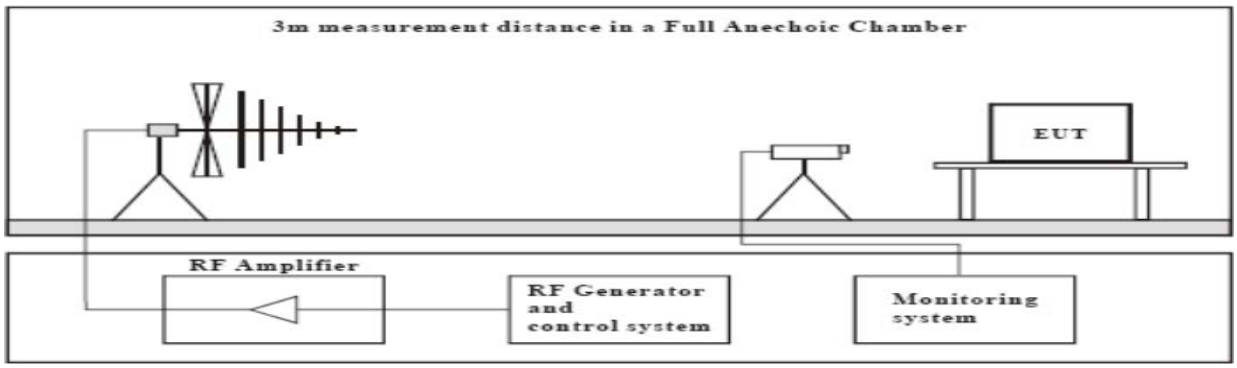

| Frequency Range (MHz) | Front Side (3 V/m) | | Rear Side (3 V/m) | | Left Side (3 V/m) | | Right Side (3 V/m) | |
|---|---|---|---|---|---|---|---|---|
| | VERT | HORI | VERT | HORI | VERT | HORI | VERT | HORI |
| 80-1000 | A | A | A | A | A | A | A | A |

### 4.6.5 Verdict

The EUT was working as normal, so it met the requirement of performance criteria A.

## 4.7 Power-frequency magnetic field


### 4.7.1 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Last Cal. Date | Cal. Due Date |
|---|---|---|---|---|---|
| HAEFELY TEST AG | Magnetic field tester | MGA 100 | 152676 | 2026.2 | 2 Year |
| EMCO | Active loop | 6502 | 9003-2484 | 2026.2 | 2 Year |

### 4.7.2 Description of Measurement Conditions

Temperature: 23℃
Humidity: 59%
Pressure: 1033mbar
Electromagnetic environment: normal

### 4.7.3 Configuration

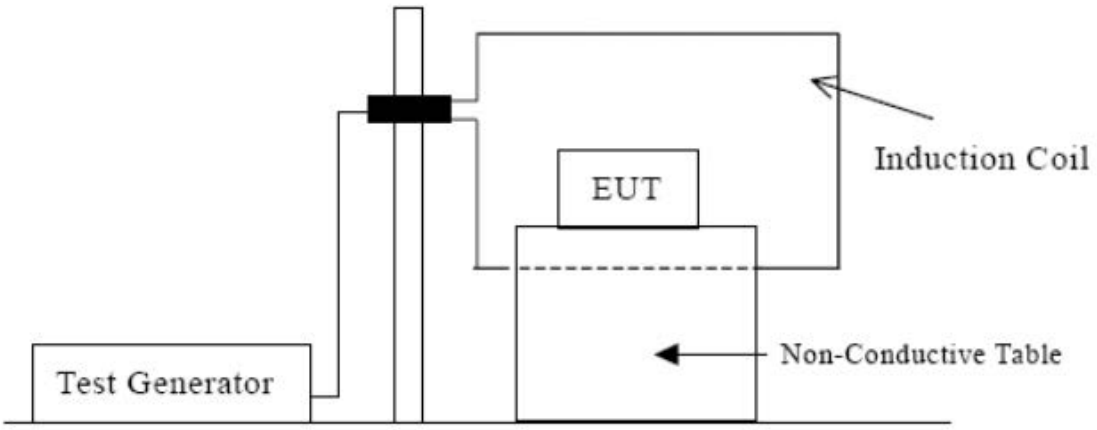

### 4.7.4 Test Data and Records

| Frequency | Testing duration | Coil Oritentation | pass |
|---|---|---|---|
| 50Hz, 60 Hz 3 A/m | 1 Min | X-axis | **A** |
| 50Hz, 60 Hz 3 A/m | 1 Min | Y-axis | **A** |
| 50Hz, 60 Hz 3 A/m | 1 Min | Z-axis | **A** |

### 4.7.5 Verdict

The EUT was working as normal, so it met the requirement of performance criteria A.