

Design to Cost · TOOL ASSEMBLY


EX26-0002 · Mould · 1 cavity

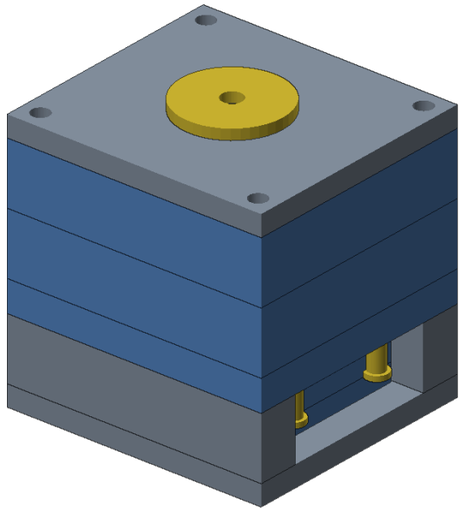

ISO VIEW (closed, bottom of stroke)

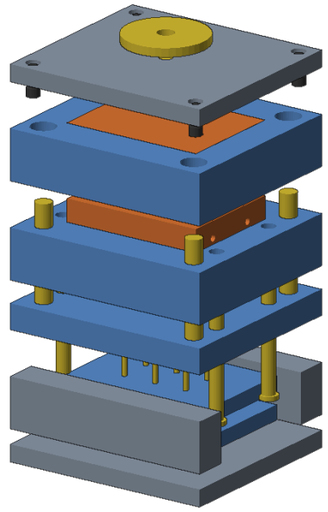

EXPLODED VIEW

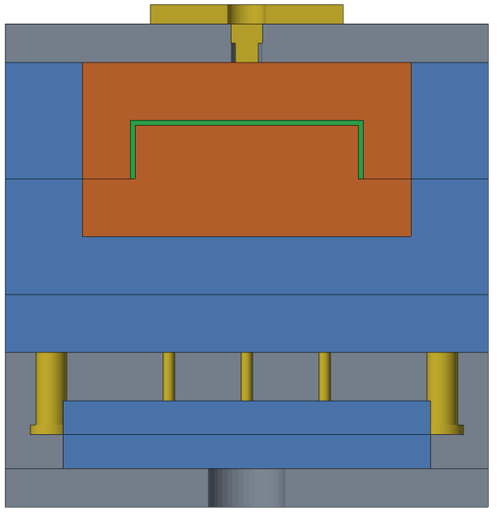

SECTION A-A (through the middle, from the front)

Item	Qty	Description	Material / grade	Hardness	Make / standard part	Size (mm)
01	1	Top clamp plate	C45 / S50C	-	LKM / Futaba	250.0 × 230.0 × 20.0
02	1	A plate (cavity side)	C45 / S50C	-	LKM / Futaba	250.0 × 230.0 × 60.0
03	1	B plate (core side)	C45 / S50C	-	LKM / Futaba	250.0 × 230.0 × 60.0
04	1	Support plate	C45 / S50C	-	LKM / Futaba	250.0 × 230.0 × 30.0
05	2	Spacer block	C45 / S50C	-	LKM / Futaba	250.0 × 40.0 × 60.0
06	1	Ejector retainer plate	C45 / S50C	-	LKM / Futaba	190.0 × 146.0 × 17.5
07	1	Ejector plate	C45 / S50C	-	LKM / Futaba	190.0 × 146.0 × 17.5
08	1	Bottom clamp plate	C45 / S50C	-	LKM / Futaba	250.0 × 230.0 × 20.0
09	1	Cavity insert	2738 (1.2738)	30-36 HRC prehardened	-	170.0 × 130.0 × 60.2
10	1	Core insert	2738 (1.2738)	30-36 HRC prehardened	-	170.0 × 130.0 × 57.6
11	4	Guide pillar Ø20	-	-	Guide pillar Ø20 g6 × 145	20.0 × 20.0 × 145.0
12	4	Guide bush Ø20	-	-	Guide bush Ø20 H7 × OD 30 × 32	30.0 × 30.0 × 32.0
13	6	Ejector pin Ø6 × 150	-	-	cut to 145.64 (fitted to the core surface)	10.0 × 10.0 × 145.6
14	4	Return pin Ø16 × 130	-	-	Return pin Ø16 × 130	22.0 × 22.0 × 129.5
15	1	Sprue bush Ø16	-	-	Sprue bush Ø16 × 20	16.0 × 16.0 × 20.0
16	1	Locating ring Ø100	-	-	Locating ring Ø100 × 10	100.0 × 100.0 × 10.0
17	4	Socket head cap screw M10 × 25	-	-	ISO 4762 M10 × 25 - 12.9	15.0 × 15.0 × 35.0

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Cavity and core = part × 1.005 (shrinkage 0.5 %). · 3. Gate, runner, vents, slides and lifters: to be added by the mould designer (see the concept analysis). · 4. Core formed by the region the part encloses (inside of the part). · 5. Cooling: 4 channel(s) Ø8 per cavity in the inserts, 20 mm from the moulding faces. · 6. Mould height 250 mm, 1 cavity, opening stroke ≥ 80 mm. · 7. Fits: pillar g6, bush H7, dowel m6 / H7


Design to Cost
Drawing no. **EX26-0002-T01-00**
Rev **A**

Part	EX26-0002 · plastic_cover	**Die set / base**	Standard 2-plate 2325 250 × 230
Tool	Mould · 1 cavity	**Shut height**	250 mm

General tolerance	ISO 2768-mK
Projection	
Scale	as shown
Sheet	1 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

01 · Top clamp plate

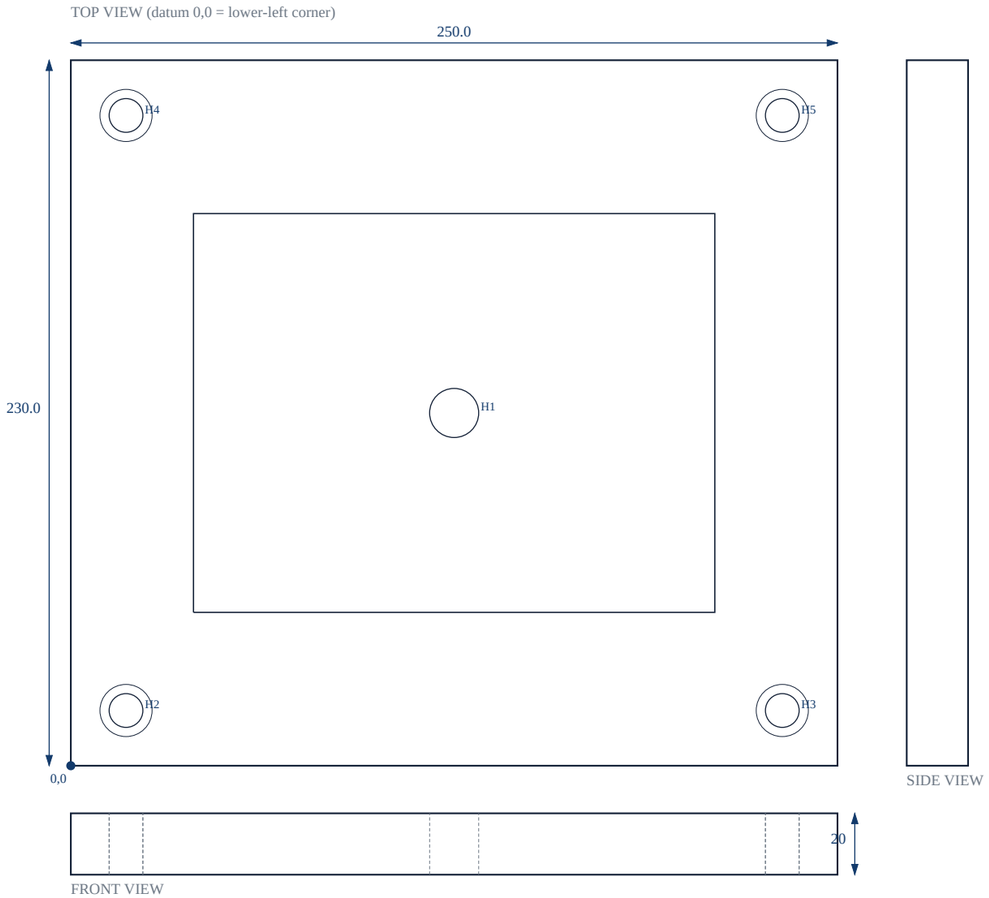

#	X	Y	Ø	Kind / fit
H1	125.00	115.00	16	Ø16 sprue bush seat, position ±0.01
H2	18.00	18.00	11	M10: Ø11 thru, counterbore Ø17 × 11
H3	232.00	18.00	11	M10: Ø11 thru, counterbore Ø17 × 11
H4	18.00	212.00	11	M10: Ø11 thru, counterbore Ø17 × 11
H5	232.00	212.00	11	M10: Ø11 thru, counterbore Ø17 × 11

Insert pocket 170 × 130, depth 0.2 from the A-plate face · tolerance H7 / js6 pocket · profile in the DXF (wire cut / CNC)

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6


Design to Cost
Drawing no. **EX26-0002-T01-01**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Top clamp plate	**Size**	250.00 × 230.00 × 20.00 mm
Item / qty	01 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:2
Sheet	2 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

02 · A plate (cavity side)

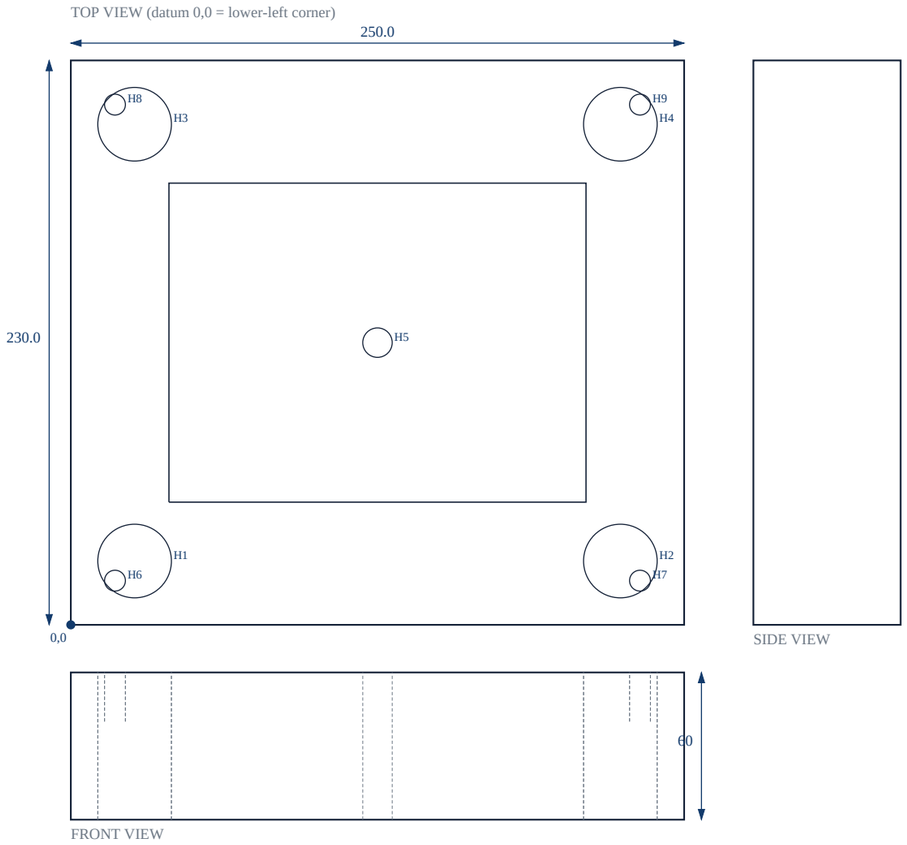

#	X	Y	Ø	Kind / fit
H1	26.00	26.00	30	Ø30 H7 guide bush seat, position ±0.01
H2	224.00	26.00	30	Ø30 H7 guide bush seat, position ±0.01
H3	26.00	204.00	30	Ø30 H7 guide bush seat, position ±0.01
H4	224.00	204.00	30	Ø30 H7 guide bush seat, position ±0.01
H5	125.00	115.00	12	Ø12 sprue bush body
H6	18.00	18.00	8.5	M10 tapped, depth 20
H7	232.00	18.00	8.5	M10 tapped, depth 20
H8	18.00	212.00	8.5	M10 tapped, depth 20
H9	232.00	212.00	8.5	M10 tapped, depth 20

Insert pocket 170 × 130, depth 60 from the parting face · tolerance H7 / js6 pocket · profile in the DXF (wire cut / CNC)

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6


Design to Cost
Drawing no. **EX26-0002-T01-02**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	A plate (cavity side)	**Size**	250.00 × 230.00 × 60.00 mm
Item / qty	02 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:2.5
Sheet	3 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

03 · B plate (core side)

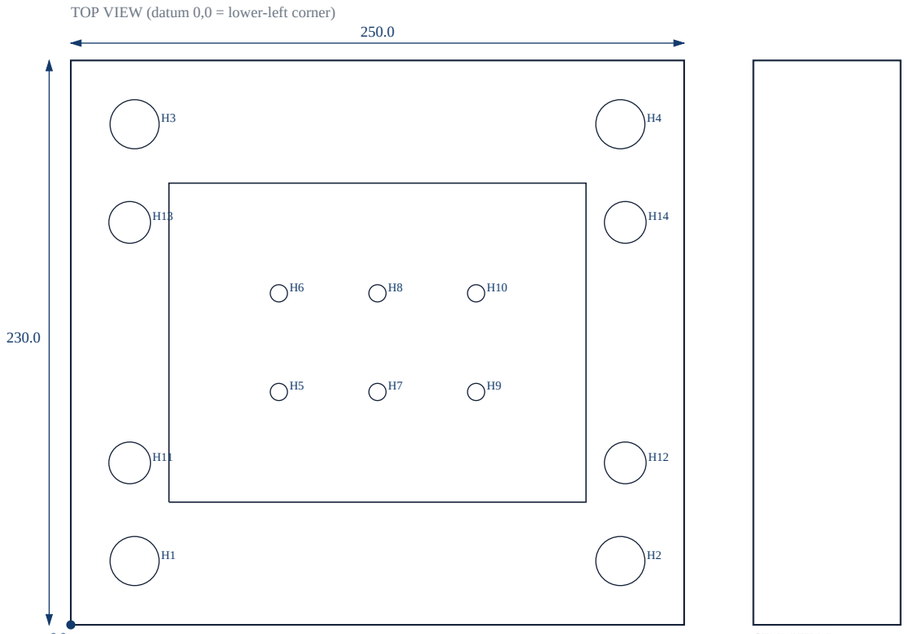



#	X	Y	Ø	Kind / fit
H1	26.00	26.00	20	Ø20 H7 guide pillar seat, position ±0.01
H2	224.00	26.00	20	Ø20 H7 guide pillar seat, position ±0.01
H3	26.00	204.00	20	Ø20 H7 guide pillar seat, position ±0.01
H4	224.00	204.00	20	Ø20 H7 guide pillar seat, position ±0.01
H5	84.80	94.90	7	Ø7 ejector pin clearance
H6	84.80	135.10	7	Ø7 ejector pin clearance
H7	125.00	94.90	7	Ø7 ejector pin clearance
H8	125.00	135.10	7	Ø7 ejector pin clearance
H9	165.20	94.90	7	Ø7 ejector pin clearance
H10	165.20	135.10	7	Ø7 ejector pin clearance
H11	24.00	66.00	17	Ø17 return pin clearance
H12	226.00	66.00	17	Ø17 return pin clearance
H13	24.00	164.00	17	Ø17 return pin clearance
H14	226.00	164.00	17	Ø17 return pin clearance

Insert pocket 170 × 130, depth 30 from the parting face · tolerance H7 / js6 pocket · profile in the DXF (wire cut / CNC)

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6


Design to Cost
Drawing no. **EX26-0002-T01-03**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	B plate (core side)	**Size**	250.00 × 230.00 × 60.00 mm
Item / qty	03 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:2.5
Sheet	4 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

04 · Support plate

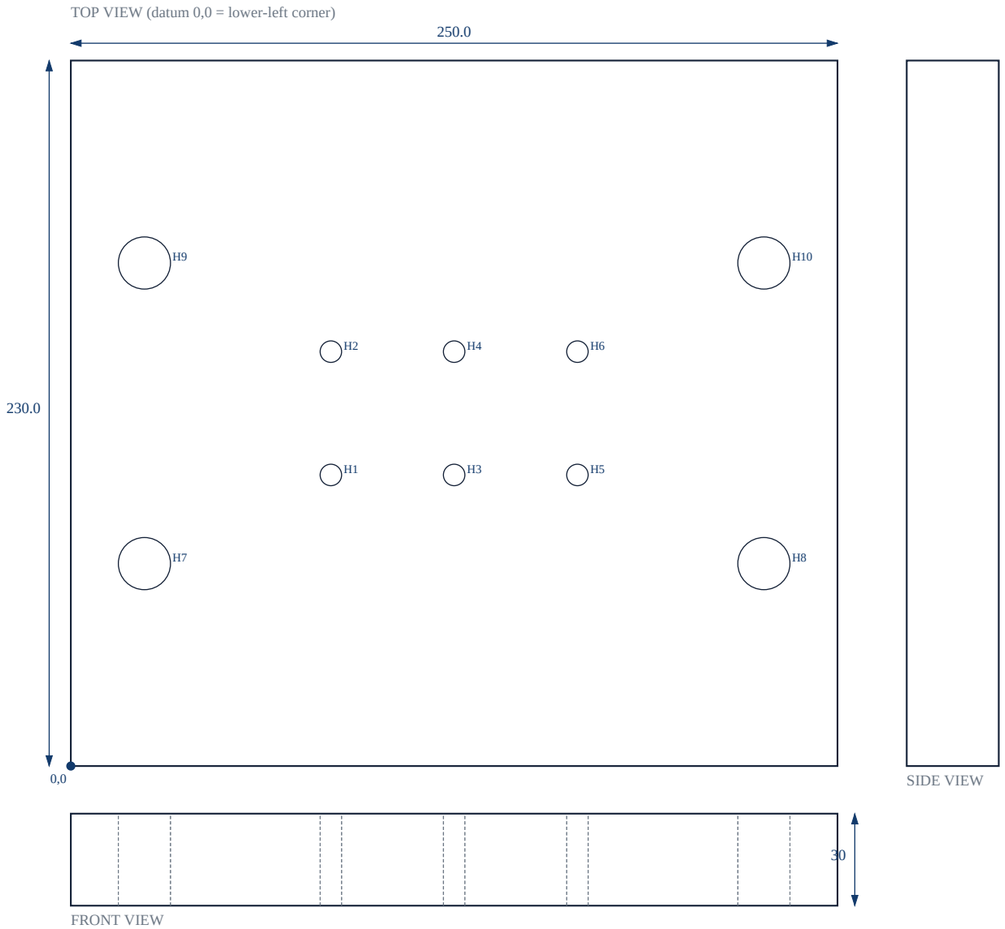

#	X	Y	Ø	Kind / fit
H1	84.80	94.90	7	Ø7 ejector pin clearance
H2	84.80	135.10	7	Ø7 ejector pin clearance
H3	125.00	94.90	7	Ø7 ejector pin clearance
H4	125.00	135.10	7	Ø7 ejector pin clearance
H5	165.20	94.90	7	Ø7 ejector pin clearance
H6	165.20	135.10	7	Ø7 ejector pin clearance
H7	24.00	66.00	17	Ø17 return pin clearance
H8	226.00	66.00	17	Ø17 return pin clearance
H9	24.00	164.00	17	Ø17 return pin clearance
H10	226.00	164.00	17	Ø17 return pin clearance

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6

Design to Cost
Drawing no. **EX26-0002-T01-04**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Support plate	**Size**	250.00 × 230.00 × 30.00 mm
Item / qty	04 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:2
Sheet	5 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

05 · Spacer block

Dimensions from the 3D model (STEP) of this part.



Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6


Design to Cost
Drawing no. **EX26-0002-T01-05**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Spacer block	**Size**	250.00 × 40.00 × 60.00 mm
Item / qty	05 · 2 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:1.5
Sheet	6 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

06 · Ejector retainer plate

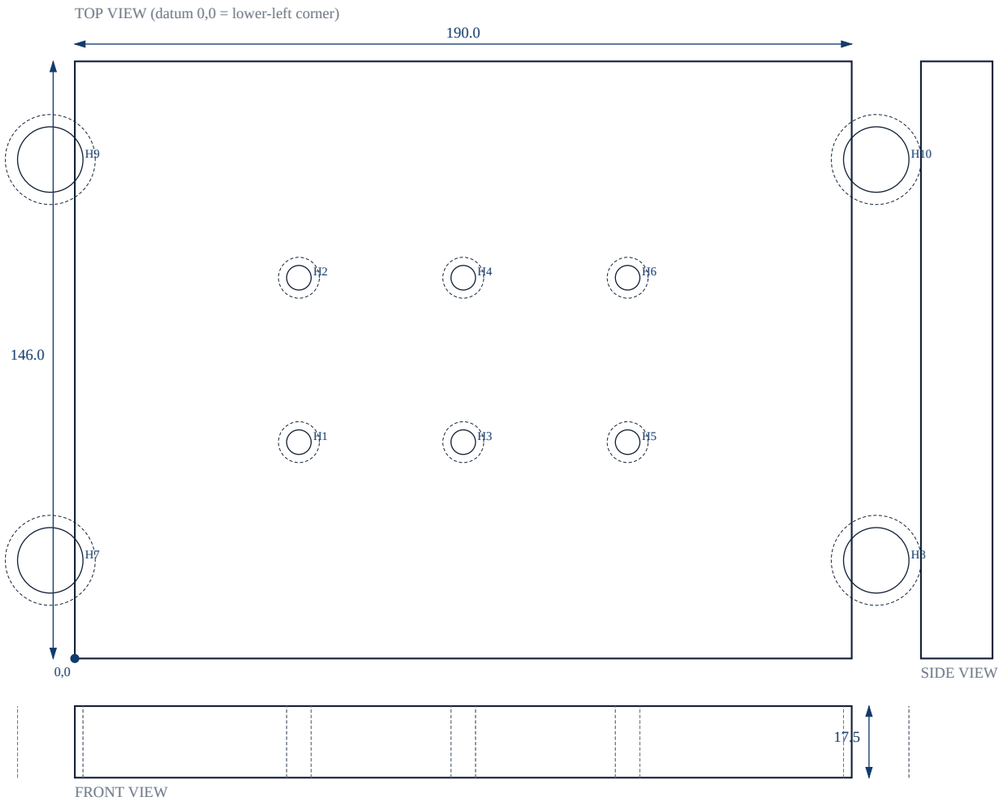

#	X	Y	Ø	Kind / fit
H1	54.80	52.90	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H2	54.80	93.10	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H3	95.00	52.90	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H4	95.00	93.10	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H5	135.20	52.90	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H6	135.20	93.10	6	ejector pin: Ø6 thru, counterbore Ø10 × 3 from below
H7	-6.00	24.00	16	return pin: Ø16 thru, counterbore Ø22 × 5 from below
H8	196.00	24.00	16	return pin: Ø16 thru, counterbore Ø22 × 5 from below
H9	-6.00	122.00	16	return pin: Ø16 thru, counterbore Ø22 × 5 from below
H10	196.00	122.00	16	return pin: Ø16 thru, counterbore Ø22 × 5 from below

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6

Design to Cost
Drawing no. **EX26-0002-T01-06**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Ejector retainer plate	**Size**	190.00 × 146.00 × 17.50 mm
Item / qty	06 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:1.5
Sheet	7 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

07 · Ejector plate

Dimensions from the 3D model (STEP) of this part.



Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6

Design to Cost
Drawing no. **EX26-0002-T01-07**
Rev **A**


Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Ejector plate	**Size**	190.00 × 146.00 × 17.50 mm
Item / qty	07 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:1.5
Sheet	8 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

08 · Bottom clamp plate

#	X	Y	Ø	Kind / fit
H1	125.00	115.00	40	Ø40 ejector rod hole

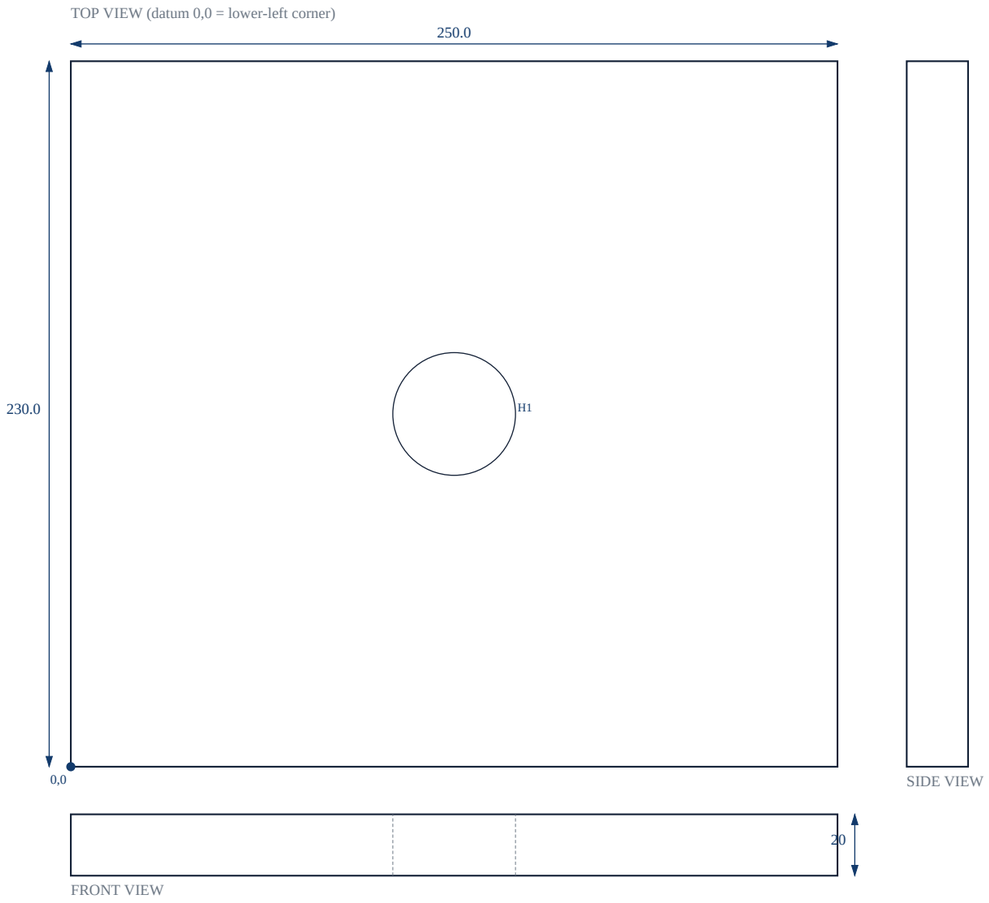

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Thickness ±0.02 mm · 3. Flatness 0.01, parallelism 0.01 · 4. Ground faces Ra 1.6

Design to Cost
Drawing no. **EX26-0002-T01-08**
Rev **A**


Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	-
Description	Bottom clamp plate	**Size**	250.00 × 230.00 × 20.00 mm
Item / qty	08 · 1 off	**Make**	LKM / Futaba
Material	C45 / S50C	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:2
Sheet	9 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

09 · Cavity insert

#	X	Y	Ø	Kind / fit
H1	85.00	32.50	8	Cooling Ø8 along X at height 50.2
H2	85.00	97.50	8	Cooling Ø8 along X at height 50.2

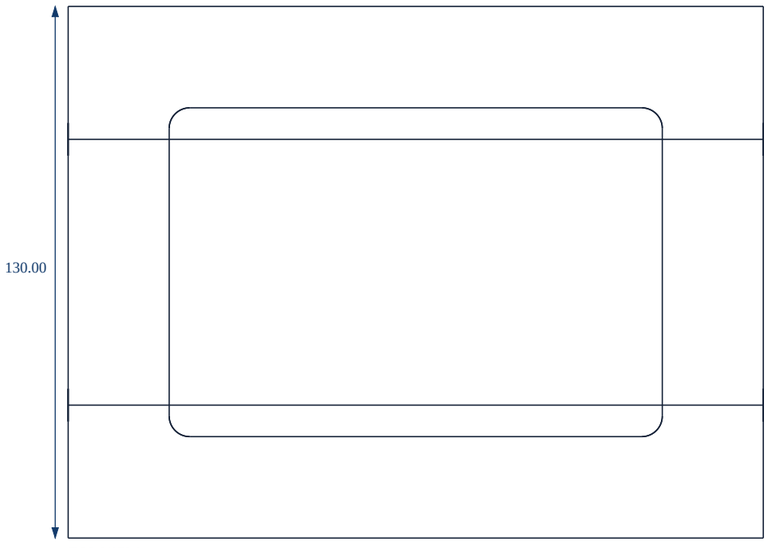

TOP VIEW



FRONT VIEW



SIDE VIEW

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Moulding faces SPI A2 polish · 3. Insert in pocket H7 / js6 pocket · 4. Harden and temper to the hardness of the grade; stress relieve before wire cut / EDM finish · 5. Cavity = part × (1 + shrinkage); dimensions from the 3D model of this insert

Design to Cost
Drawing no. **EX26-0002-T01-09**
Rev **A**


Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	30-36 HRC prehardened
Description	Cavity insert	**Size**	170.00 × 130.00 × 60.15 mm
Item / qty	09 · 1 off	**Make**	-
Material	2738 (1.2738)	**Finish**	Ra 1.6


General tolerance	ISO 2768-mK
Projection	
Scale	1:1.5
Sheet	10 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-

Design to Cost · DETAIL DRAWING

10 · Core insert

Dimensions from the 3D model (STEP) of this part.

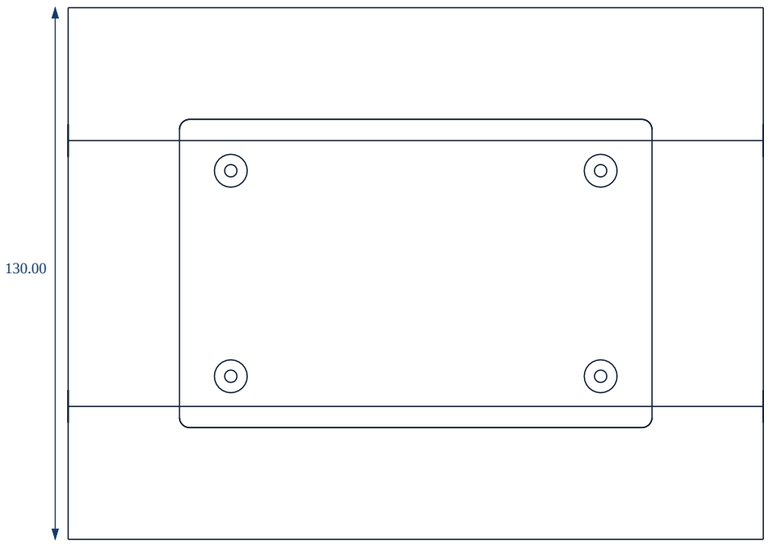

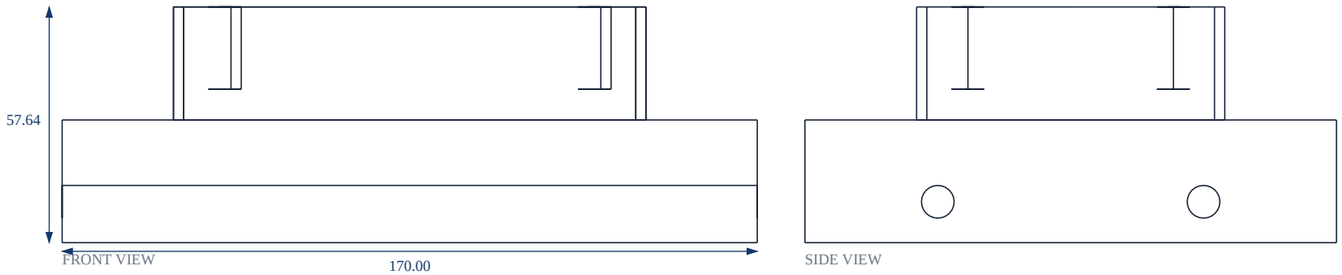

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. Moulding faces SPI A2 polish · 3. Insert in pocket H7 / js6 pocket · 4. Harden and temper to the hardness of the grade; stress relieve before wire cut / EDM finish

Design to Cost
Drawing no. **EX26-0002-T01-10**
Rev **A**

Part (tool for)	EX26-0002 · Mould · 1 cavity	**Hardness**	30-36 HRC prehardened
Description	Core insert	**Size**	170.00 × 130.00 × 57.64 mm
Item / qty	10 · 1 off	**Make**	-
Material	2738 (1.2738)	**Finish**	Ra 1.6

General tolerance	ISO 2768-mK
Projection	
Scale	1:1.5
Sheet	11 / 11
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-