

nextview
the vision...®

32"


DIGITAL

SIGNAGES STANDEE

MARKETING YOUR BUSINESS TO NEXT LEVEL



FULL HD

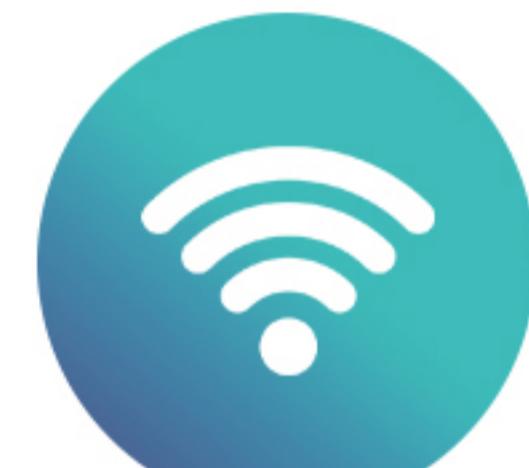

WIFI




AUTO START



TRIPLE
PROTECTION
WARRANTY




MULTI INDIAN
LANG SUPPORT
IN TICKER

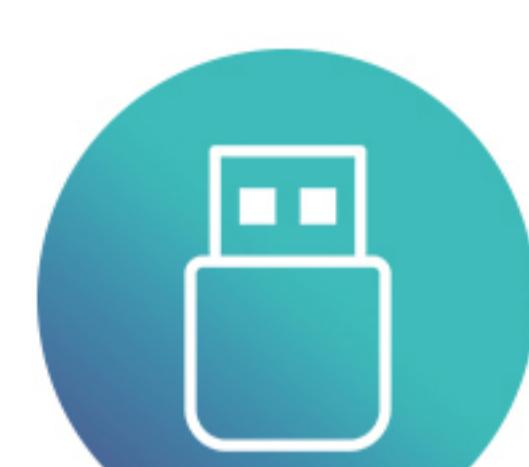

2 USB




TAMPERED
GLASS

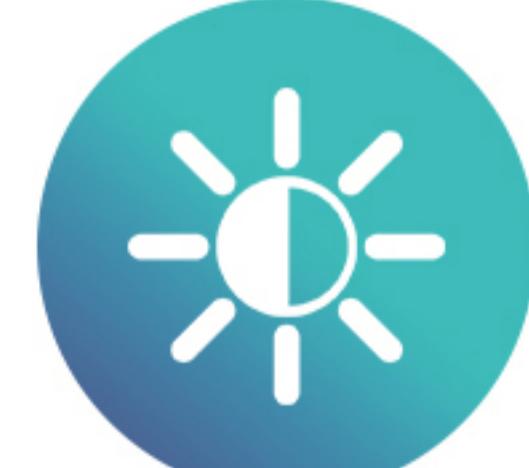

HIGH
BRIGHTNESS



MULTI SCREEN
ZONE

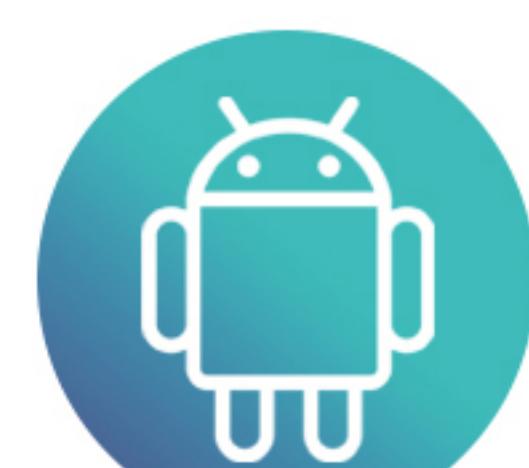

ANDROID OS

SPECIFICATION

HARDWARE SPECIFICATION

➤ RAM	1 GB
➤ ROM	8 GB
➤ RESOLUTION	1920X1080 (FULL HD)
➤ PANEL	A+ PANEL
➤ BRIGHTNESS (NITS)	UP TO 250 NITS
➤ OPERATING SYSTEM	CUSTOM ANDROID
➤ WI-FI	2.4 GHZ WI-FI SUPPORT
➤ USB PORTS	2 USB SLOTS
➤ COLOR MODES	VIVID, STANDARD, USER
➤ AUDIO OUTPUT	2 X 10 WATT (OPTIONAL)
➤ DUAL DISPLAY	OPTIONAL (SOFTWARE FEATURES)
➤ REFRESH RATE	60 HZ
➤ ETHERNET	OPTIONAL (WIRED CONNECTION)

RESOLUTION SUPPORTED

THE SYSTEM SUPPORTS THE FOLLOWING RESOLUTIONS,
DEPENDING ON THE SCREEN'S ROTATION:

FOR 0 DEGREES (LANDSCAPE MODE):

RESOLUTION	DESCRIPTION
• 960X540	HD
• 1280X720	HD
• 1920X1080	FULL HD

FOR 90 DEGREES (PORTRAIT MODE):

RESOLUTION	DESCRIPTION
• 540X960	HD
• 720X1280	HD

DISPLAY SETTINGS (ROTATION)

THE DISPLAY CAN BE ROTATED IN INCREMENTS OF **90 DEGREES**:

ROTATION ANGLE	ORIENTATION
• 0 DEGREES	NORMAL ORIENTATION / LANDSCAPE
• 90 DEGREES	PORTRAIT MODE
• 180 DEGREES	UPSIDE DOWN / LANDSCAPE
• 270 DEGREES	PORTRAIT MODE, UPSIDE DOWN

CONTENT ADJUSTS BASED ON THE ROTATION ANGLE TO FIT THE DISPLAY PROPERLY.

SOFTWARE FEATURES

MEDIA MANAGEMENT

- UPLOAD AND MANAGE MEDIA FILES (IMAGES AND VIDEOS)
- SCHEDULE MEDIA BASED ON SPECIFIC CRITERIA (E.G., DISPLAY ON CERTAIN DAYS OR AT SPECIFIC TIMES).
- SET MEDIA DURATION IN SECONDS.

TICKER SETTINGS

FEATURE	DESCRIPTION
<ul style="list-style-type: none"> • TEXT • BACKGROUND COLOR • TEXT COLOR • SCROLL SPEED • ENABLE/DISABLE TICKER 	<p>CUSTOMIZE TICKER TEXT (E.G., "WELCOME TO DIGITAL")</p> <p>CHOOSE BACKGROUND COLOR FOR THE TICKER</p> <p>CHOOSE TEXT COLOR FOR THE TICKER.</p> <p>ADJUST THE SPEED OF THE TICKER SCROLL.</p> <p>OPTION TO ENABLE OR DISABLE THE TICKER.</p>

MEDIA REFRESH

DYNAMIC UPDATES : ALLOW FOR AUTOMATIC OR MANUAL REFRESH OF MEDIA CONTENT WHEN NEW MEDIA IS ADDED.

USER INTERFACE

ADMIN PANEL* (OPTIONAL)

FEATURE	DESCRIPTION
• WEB INTERFACE	MANAGE MEDIA, DISPLAY SETTINGS, AND TICKER SETTINGS FROM A SINGLE WEB INTERFACE.
• REAL-TIME UPDATES	REAL-TIME UPDATES FOR DISPLAY SETTINGS (ROTATION) AND TICKER CONFIGURATIONS.
• MEDIA MANAGEMENT	UPLOAD AND MANAGE MEDIA.
• SCHEDULE CONTENT	SET CRITERIA FOR DISPLAY CONTENT BASED ON TIME OR DAYS.

APP CONTROL VIA WI-FI IN LOCAL NETWORK* (OPTIONAL)

FEATURE	DESCRIPTION
• REMOTE CONTROL	MANAGE DIGITAL SIGNAGE VIA AN APP OVER WI-FI WITHIN THE LOCAL NETWORK.
• CONTROL MULTIPLE DEVICES	INTERACT WITH MULTIPLE DEVICES IN THE SAME NETWORK TO UPDATE MEDIA AND SETTINGS.
• INSTANT MEDIA UPDATES	CHANGES TO MEDIA OR SETTINGS ARE REFLECTED IN REAL-TIME ACROSS ALL CONNECTED DEVICES.

*SPLIT SCREEN NOT SUPPORTED



32" DIGITAL STANDEE
NVSG32SWPS

MULTI-DEVICE MANAGEMENT

MANAGE MULTIPLE DISPLAYS* (OPTIONAL)

FEATURE	DESCRIPTION
<ul style="list-style-type: none">• CONTROL EACH DISPLAY INDIVIDUALLY	CONTROL EACH DEVICE SEPARATELY OR GROUP THEM FOR MASS UPDATES.
<ul style="list-style-type: none">• CENTRALIZED CONTROL PANEL	MANAGE ALL CONNECTED DEVICES FROM A SINGLE DASHBOARD.
<ul style="list-style-type: none">• MONITOR DEVICE STATUS	TRACK DEVICE STATUS AND UPDATE SETTINGS SUCH AS DISPLAY ROTATION AND TICKER SETTINGS.

SYNC ACROSS DEVICES* (OPTIONAL)

FEATURE	DESCRIPTION
<ul style="list-style-type: none">• UNIFORM UPDATES	SYNC MEDIA SCHEDULES AND DISPLAY SETTINGS ACROSS ALL DEVICES FOR CONSISTENCY.

ACCESSORIES INCLUDED

ACCESSORY	DETAILS
<ul style="list-style-type: none">• 2 AAA CELLS• REMOTE CONTROL	FOR REMOTE CONTROL (INCLUDED) REMOTE CONTROL UNIT (INCLUDED)

*SPLIT SCREEN NOT SUPPORTED

WARRANTY


⦿ 2 YEARS WARRANTY

INCLUDES COVERAGE FOR ANY MANUFACTURING DEFECTS.

SOFTWARE CUSTOMIZATION(OPTIONAL)

⦿ CUSTOMIZATION CHARGES

EXTRA CHARGES APPLY FOR CUSTOM SOFTWARE DEVELOPMENT. THIS FEATURE IS OPTIONAL AND TAILORED TO SPECIFIC CUSTOMER NEEDS.

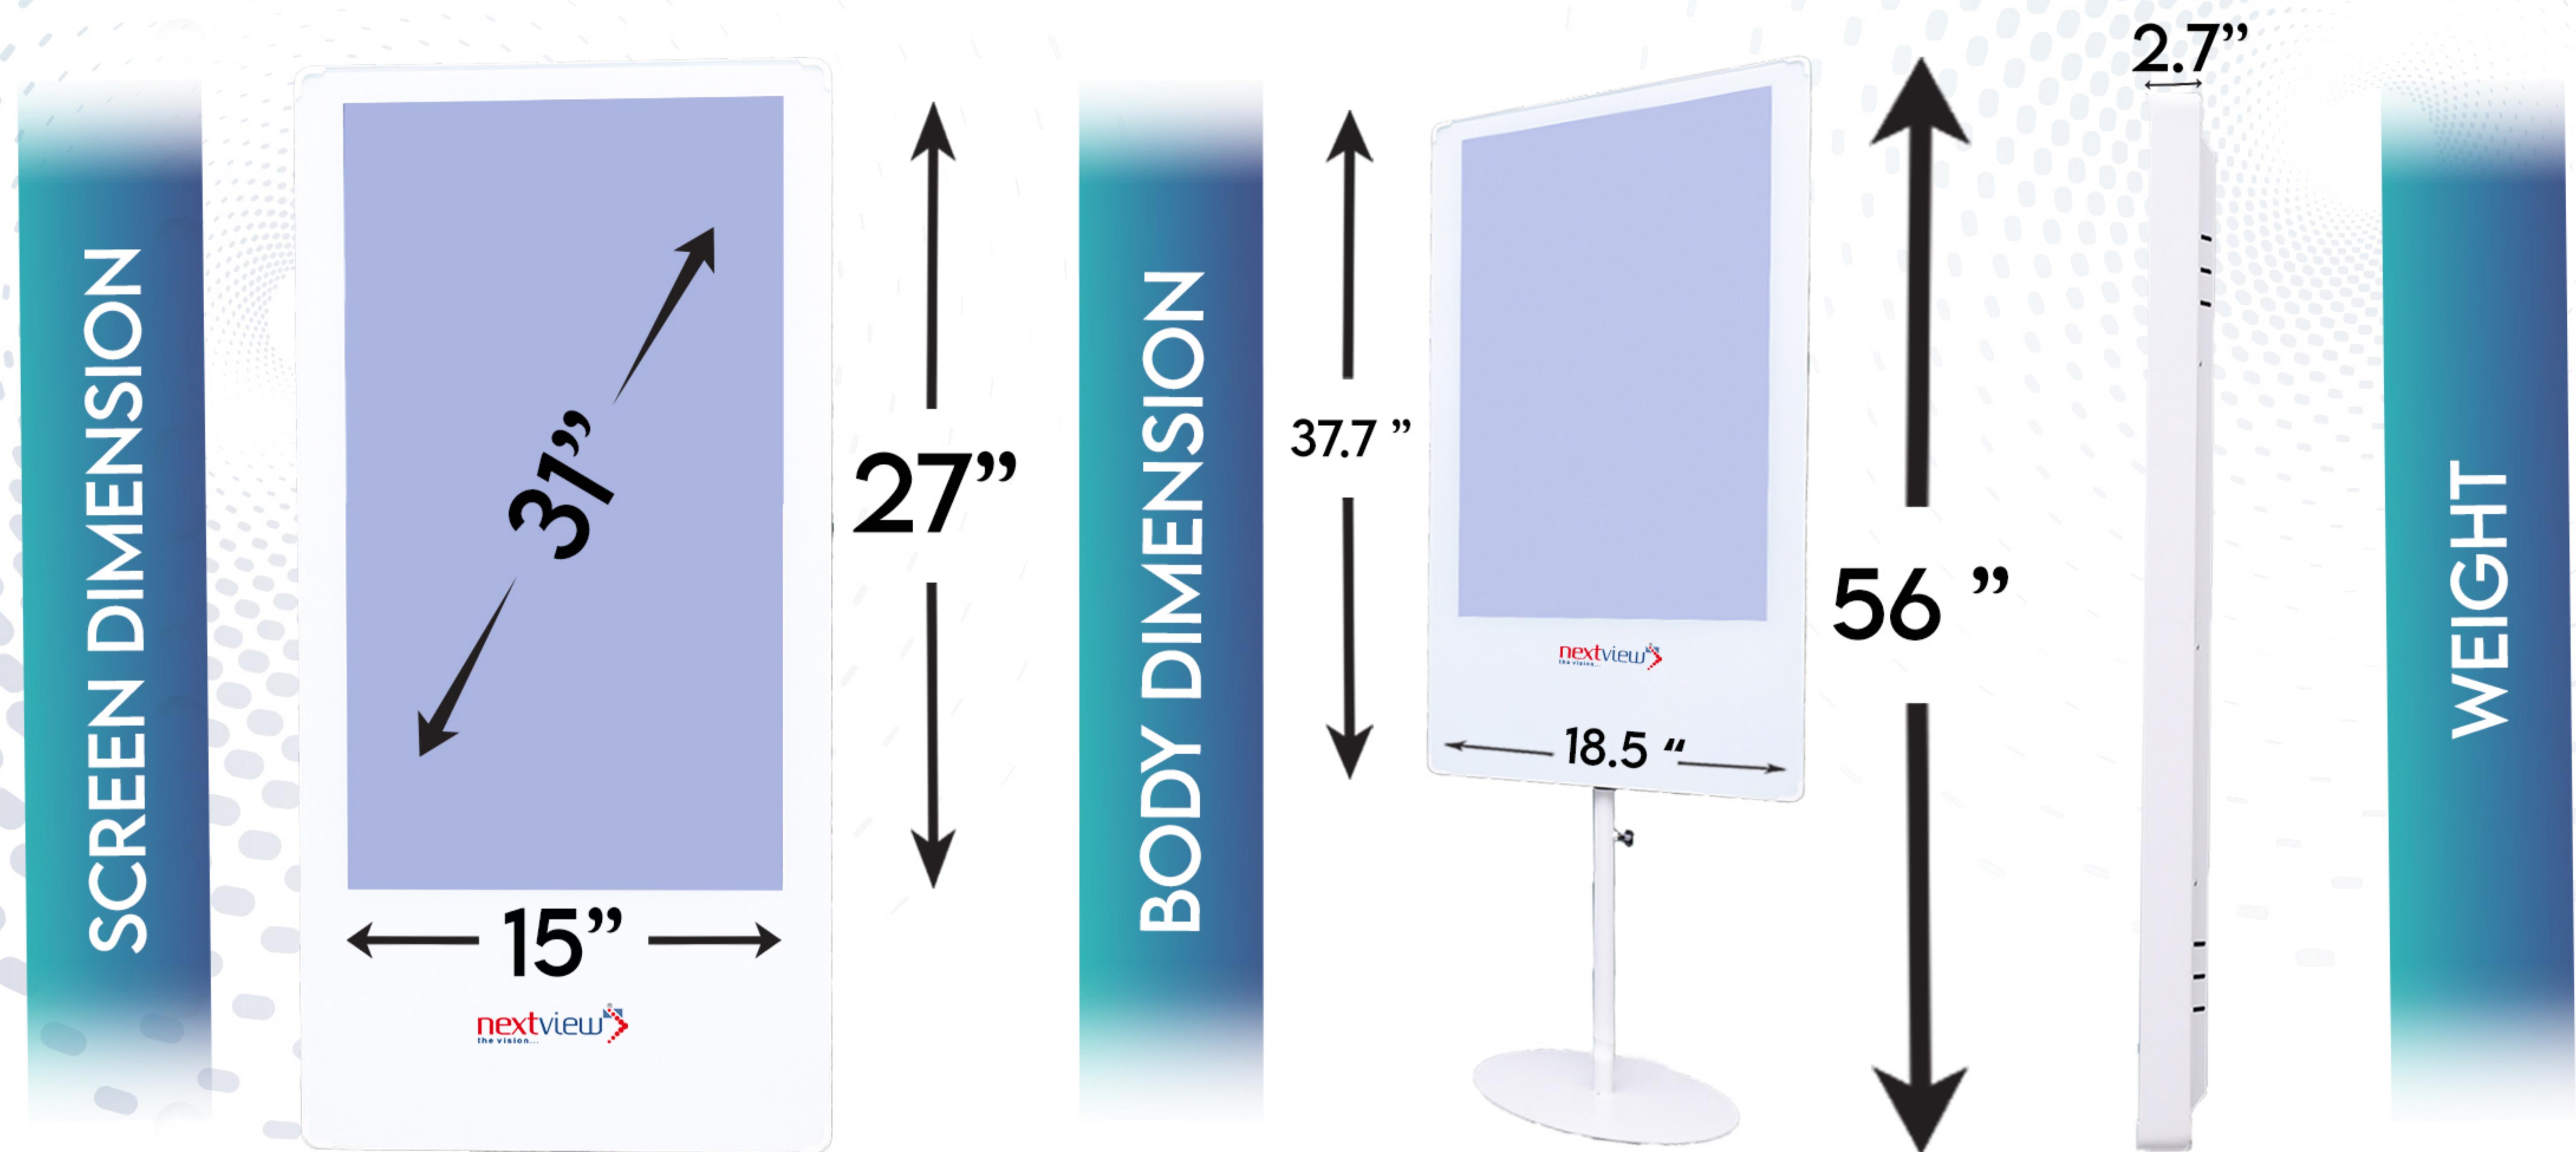

POWER REQUIREMENTS

SPECIFICATION	DETAILS
• POWER REQUIREMENT	110-240VAC 50/60HZ
• POWER CONSUMPTION (STANDBY)	0.5W AT 240VAC INPUT & NO LOAD CONDITION
• MAXIMUM RATED POWER	60 WATT
• CURRENT	≤ 1.8 AMP