Probabilistic Robotics

Bayes Filter Implementations

Particle filters

Sample-based Localization (sonar)

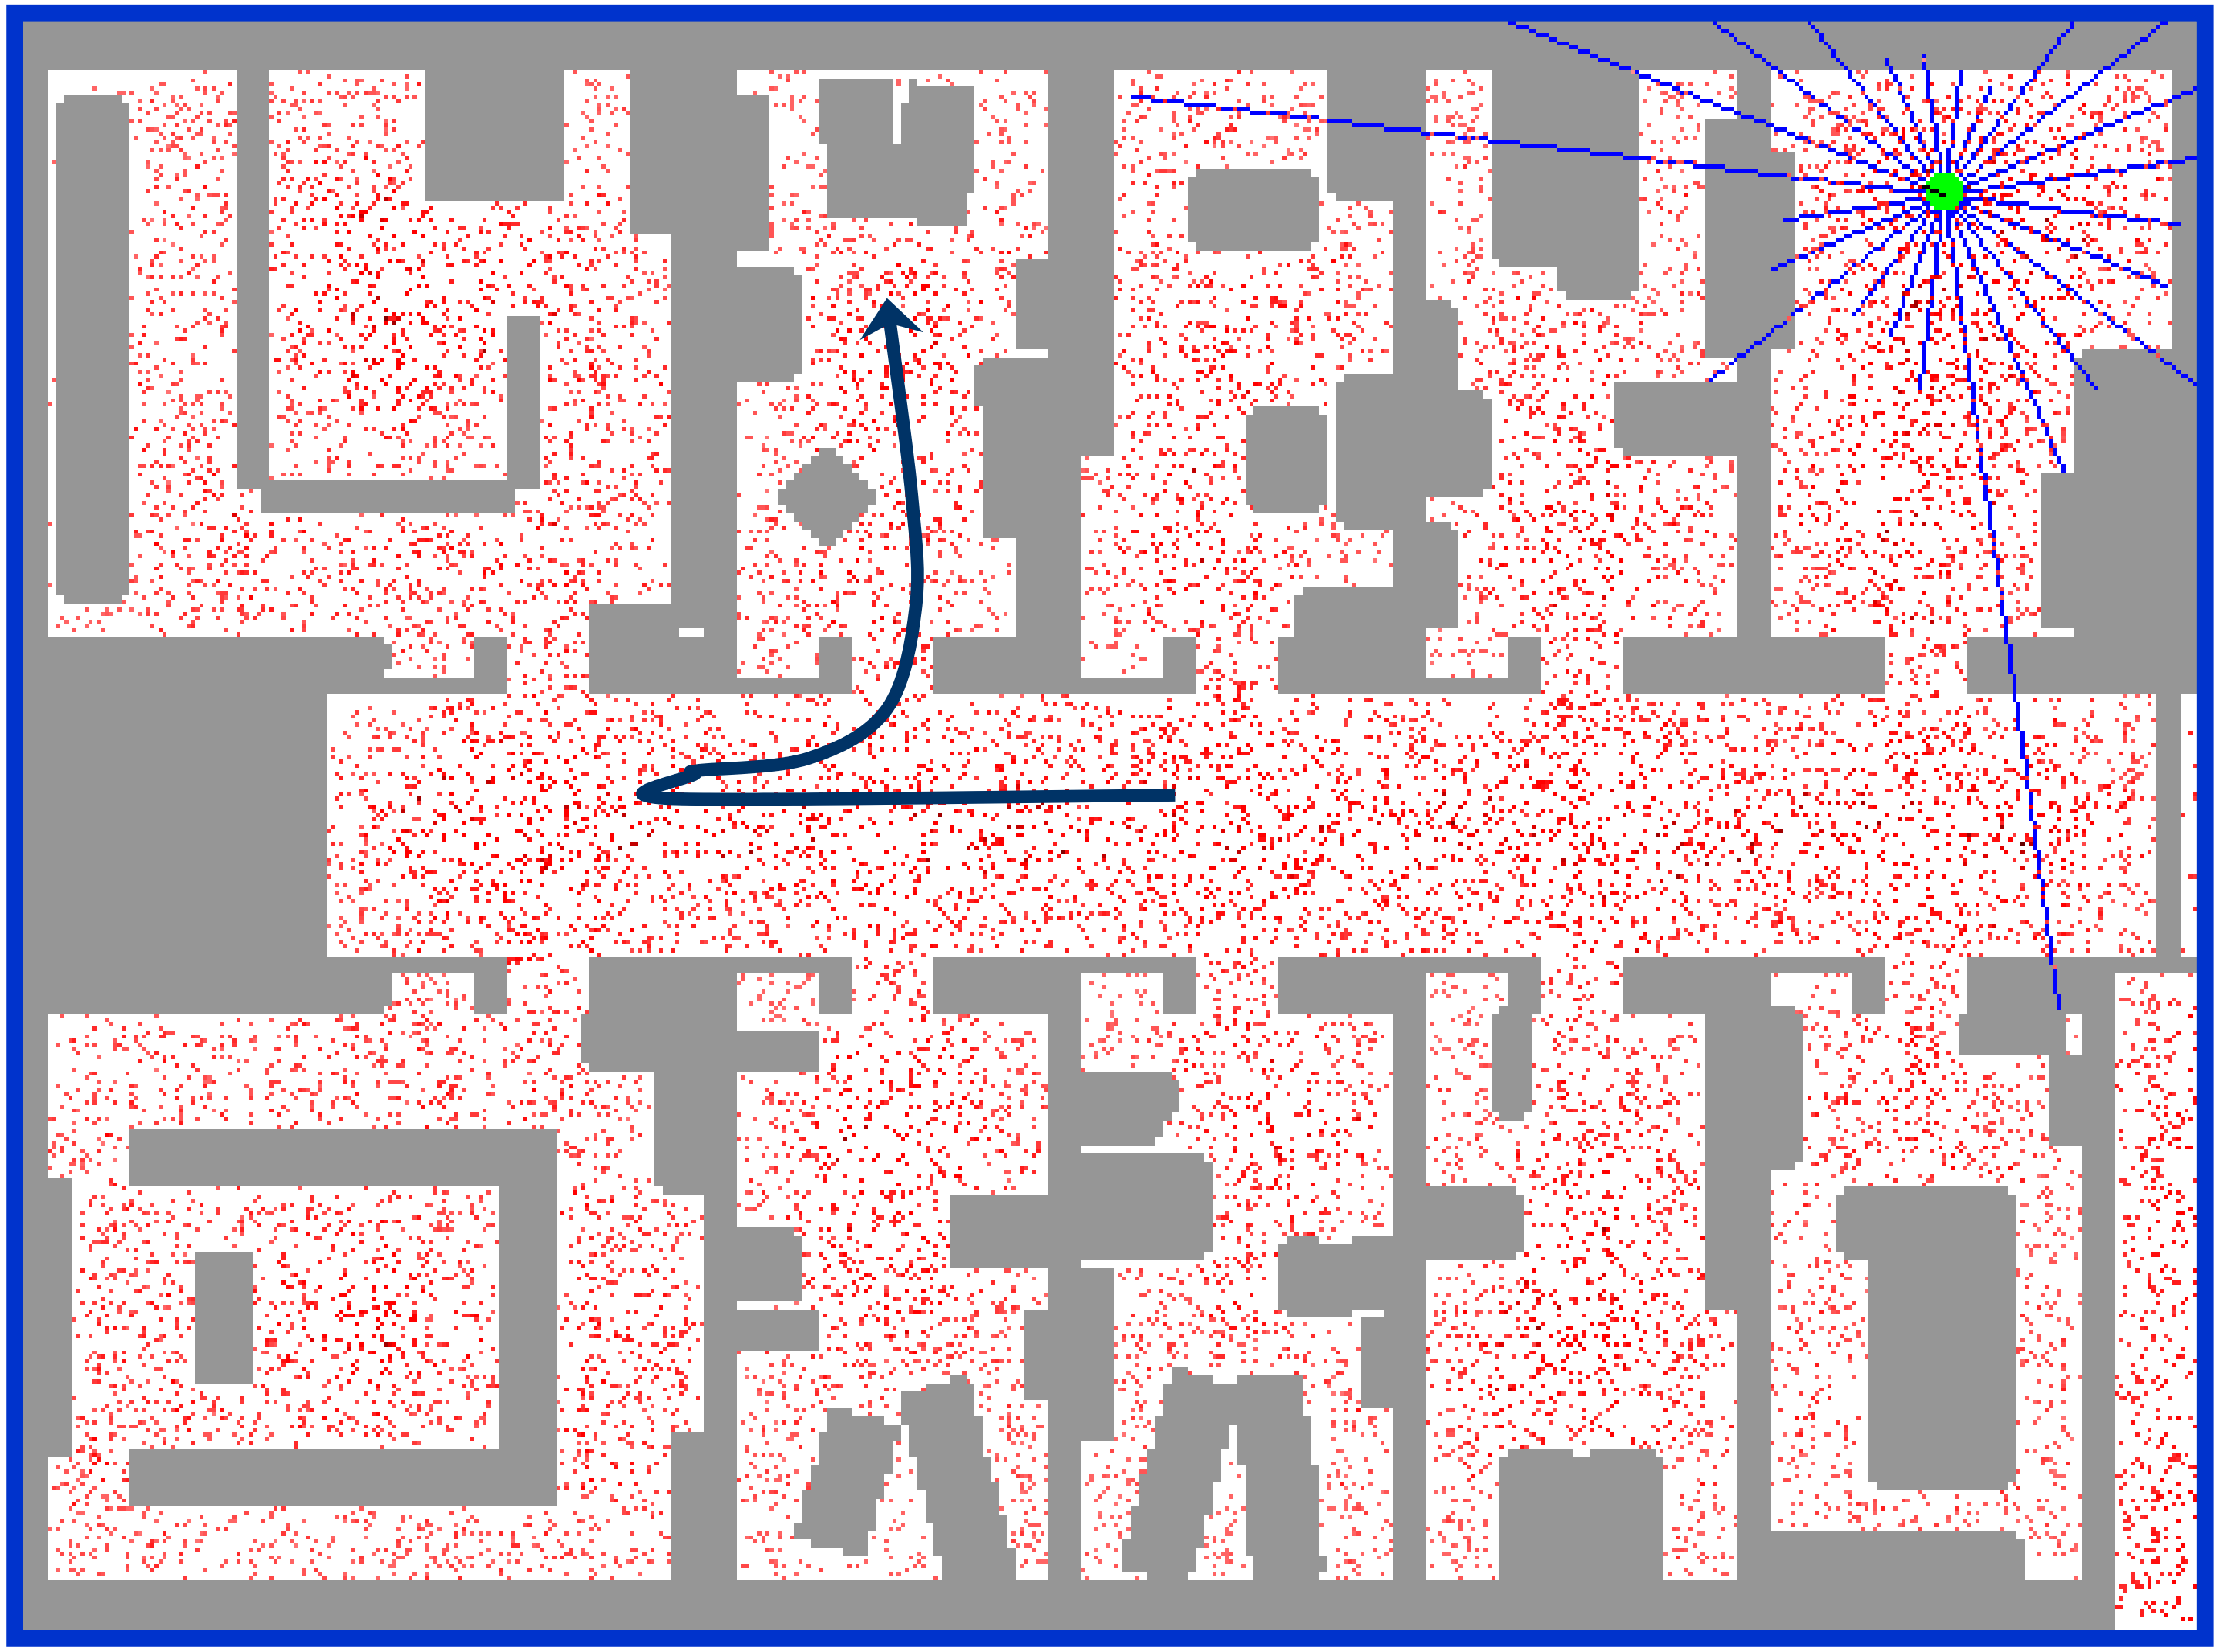

Particle Filters

- Represent belief by random samples
- Estimation of non-Gaussian, nonlinear processes

- Monte Carlo filter, Survival of the fittest, Condensation, Bootstrap filter, Particle filter

- Filtering: [Rubin, 88], [Gordon et al., 93], [Kitagawa 96]
- Computer vision: [Isard and Blake 96, 98]
- Dynamic Bayesian Networks: [Kanazawa et al., 95]d

Importance Sampling

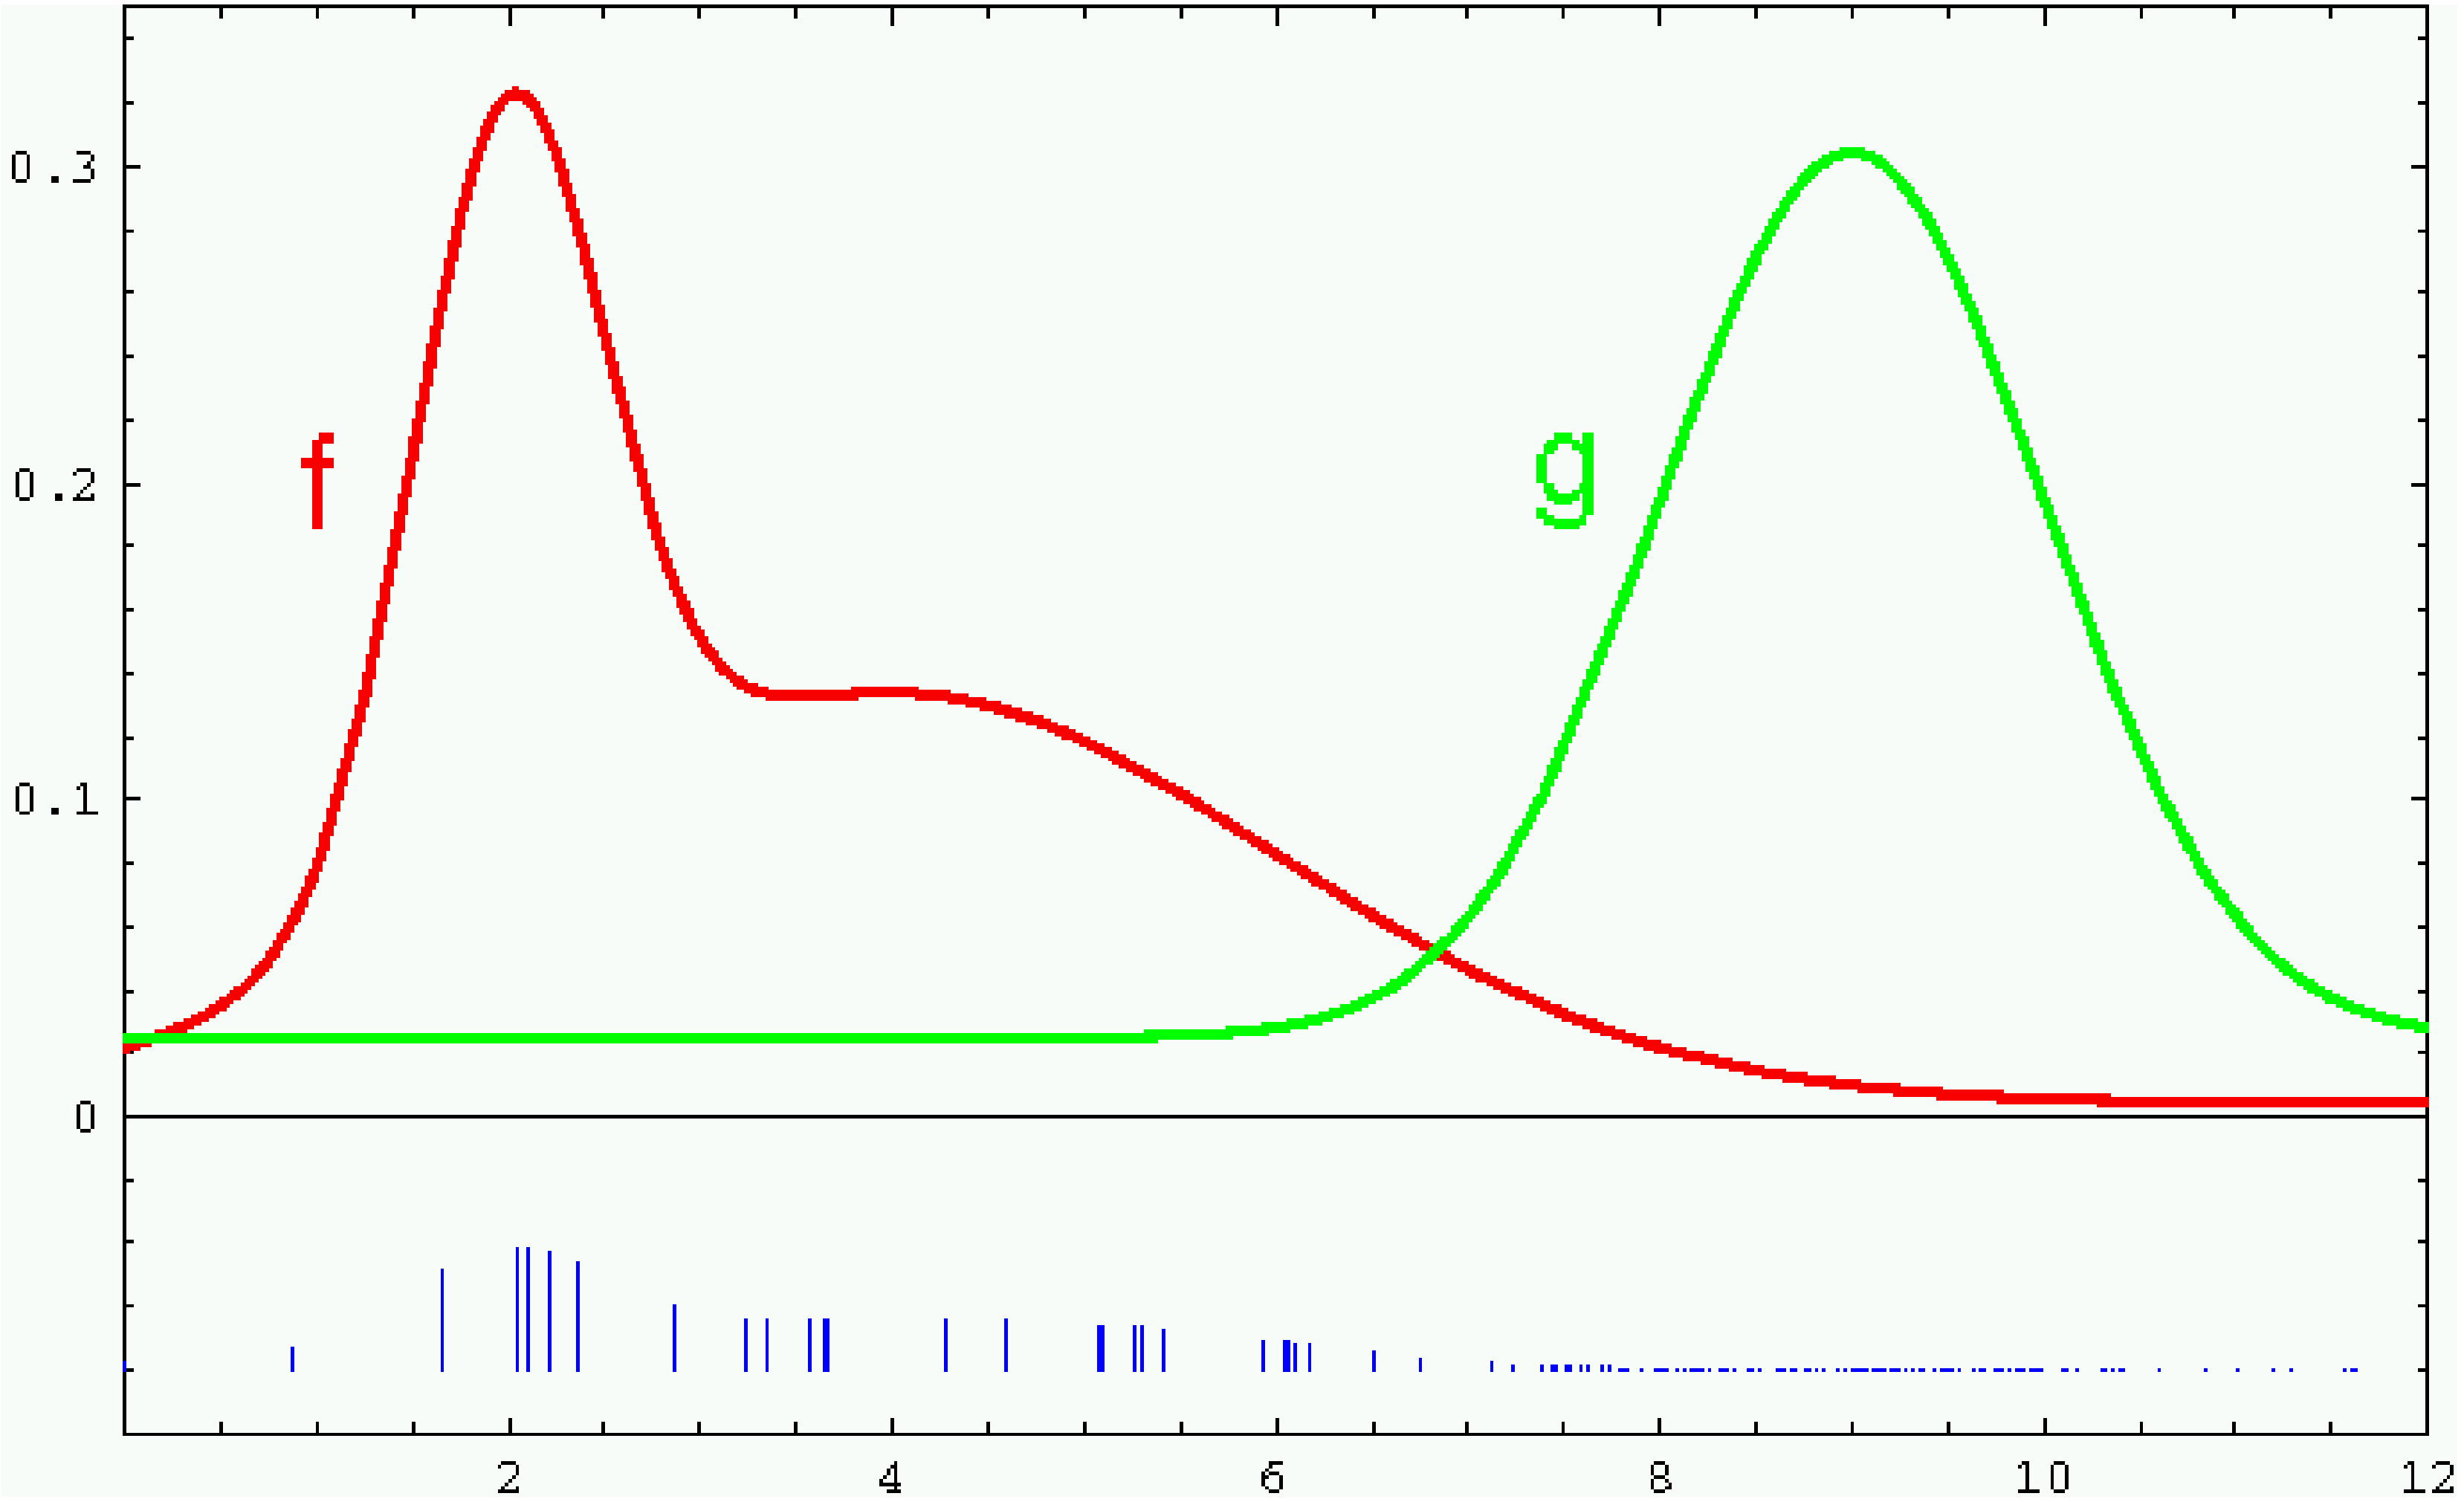

Weight samples: $w = f / g$

Importance Sampling with Resampling: Landmark Detection Example

Distributions

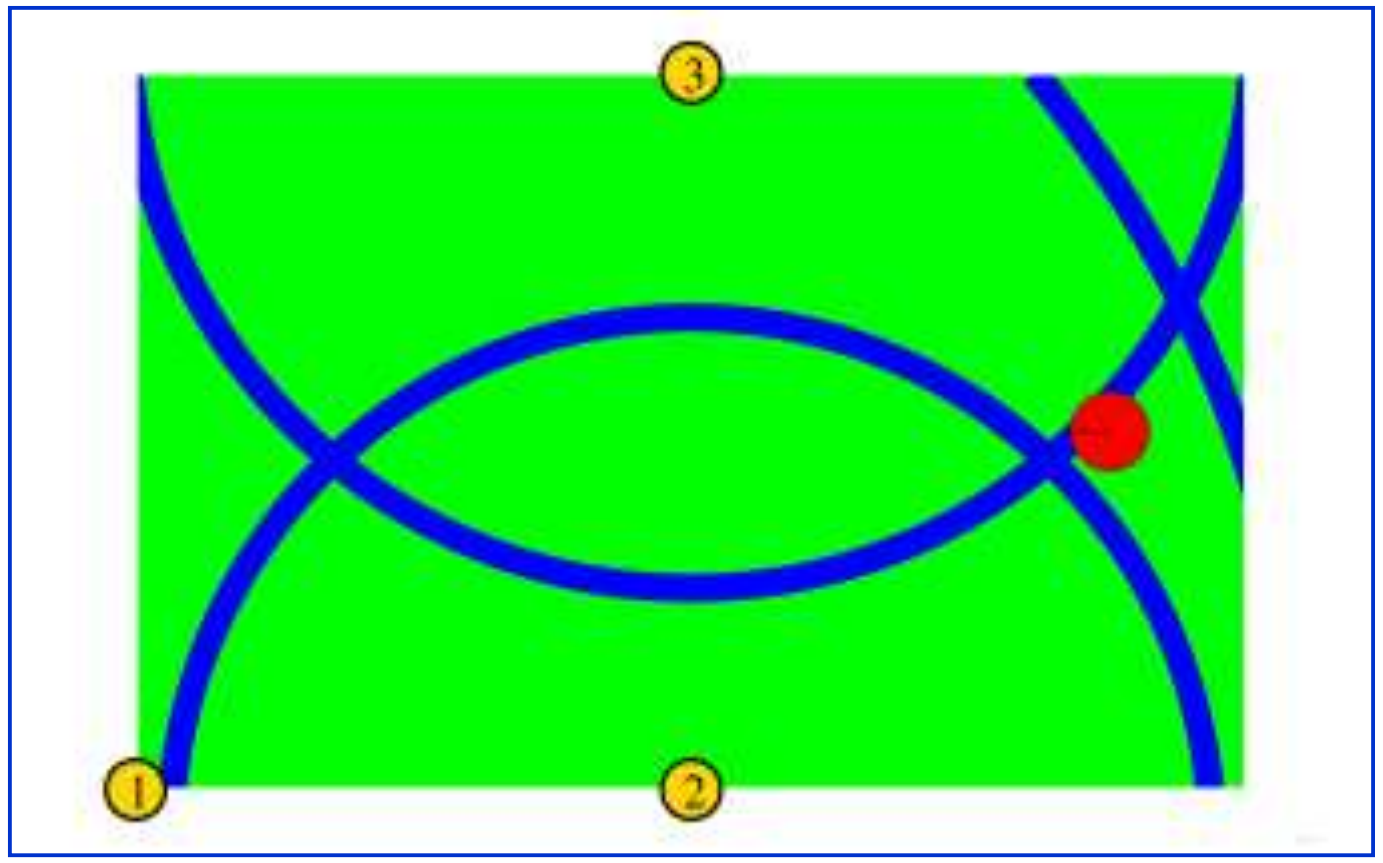

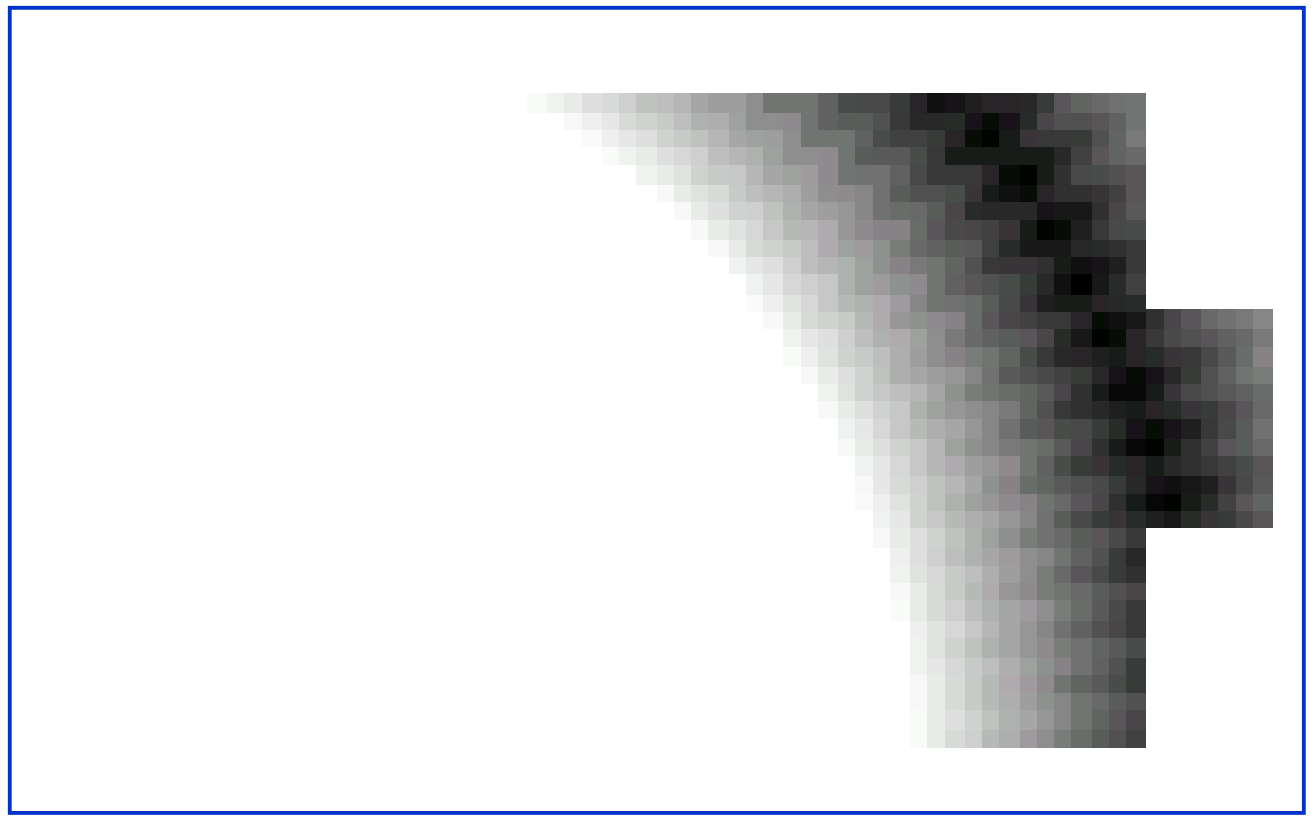

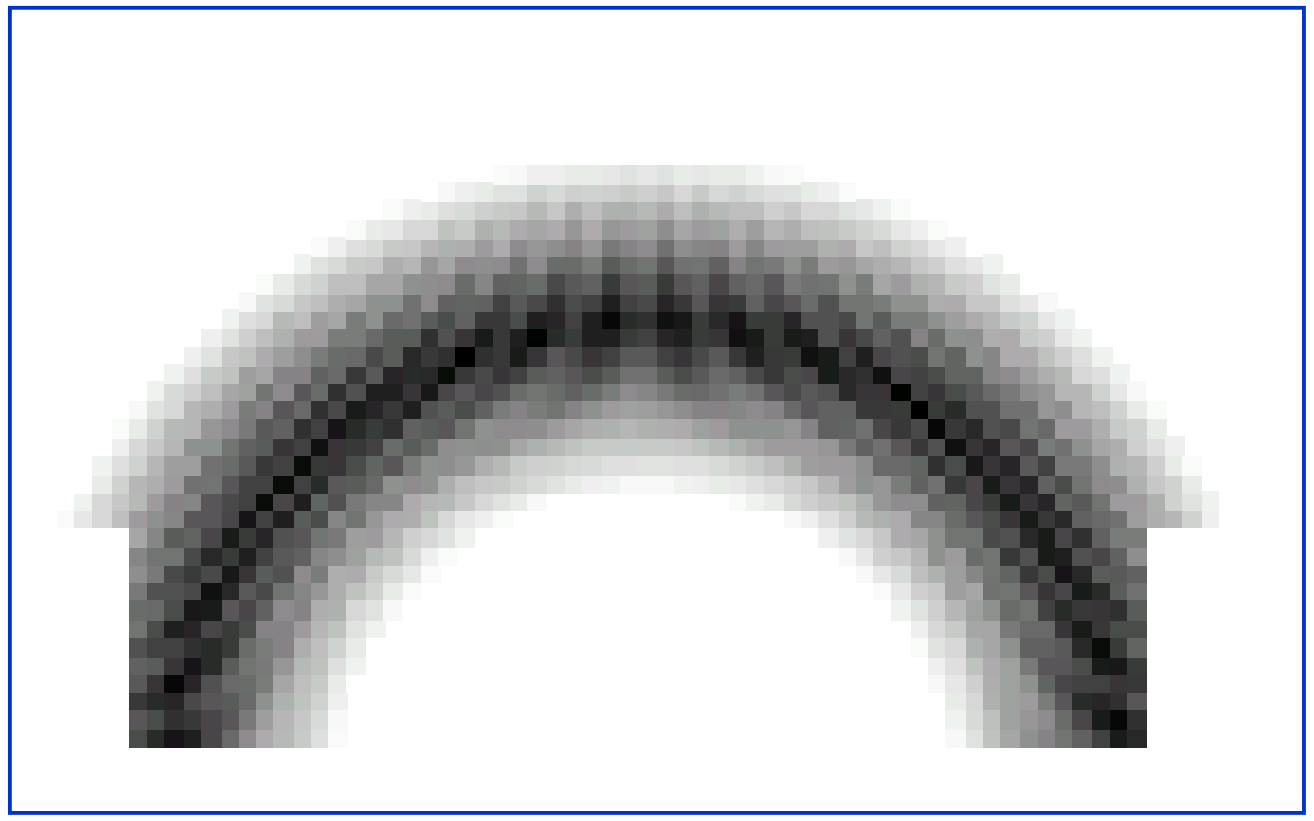

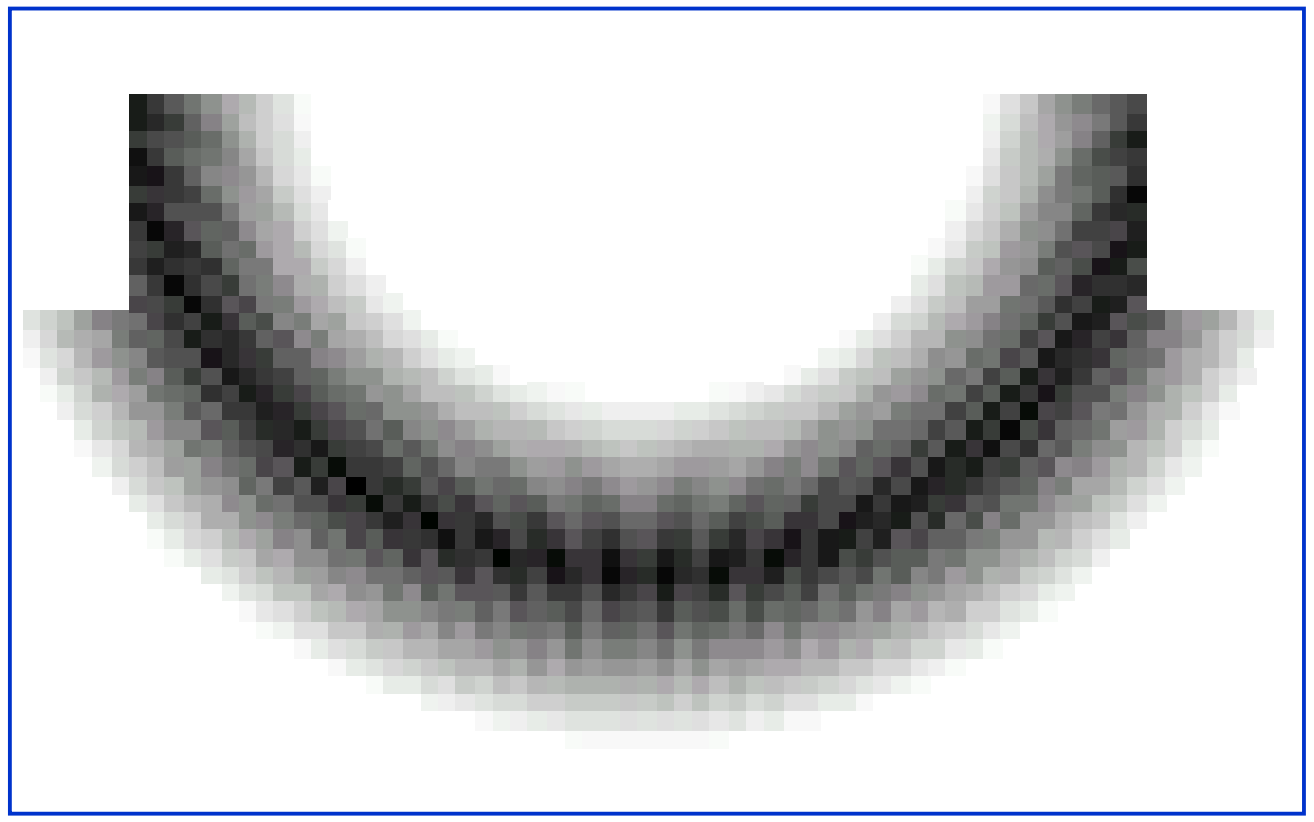



Distributions

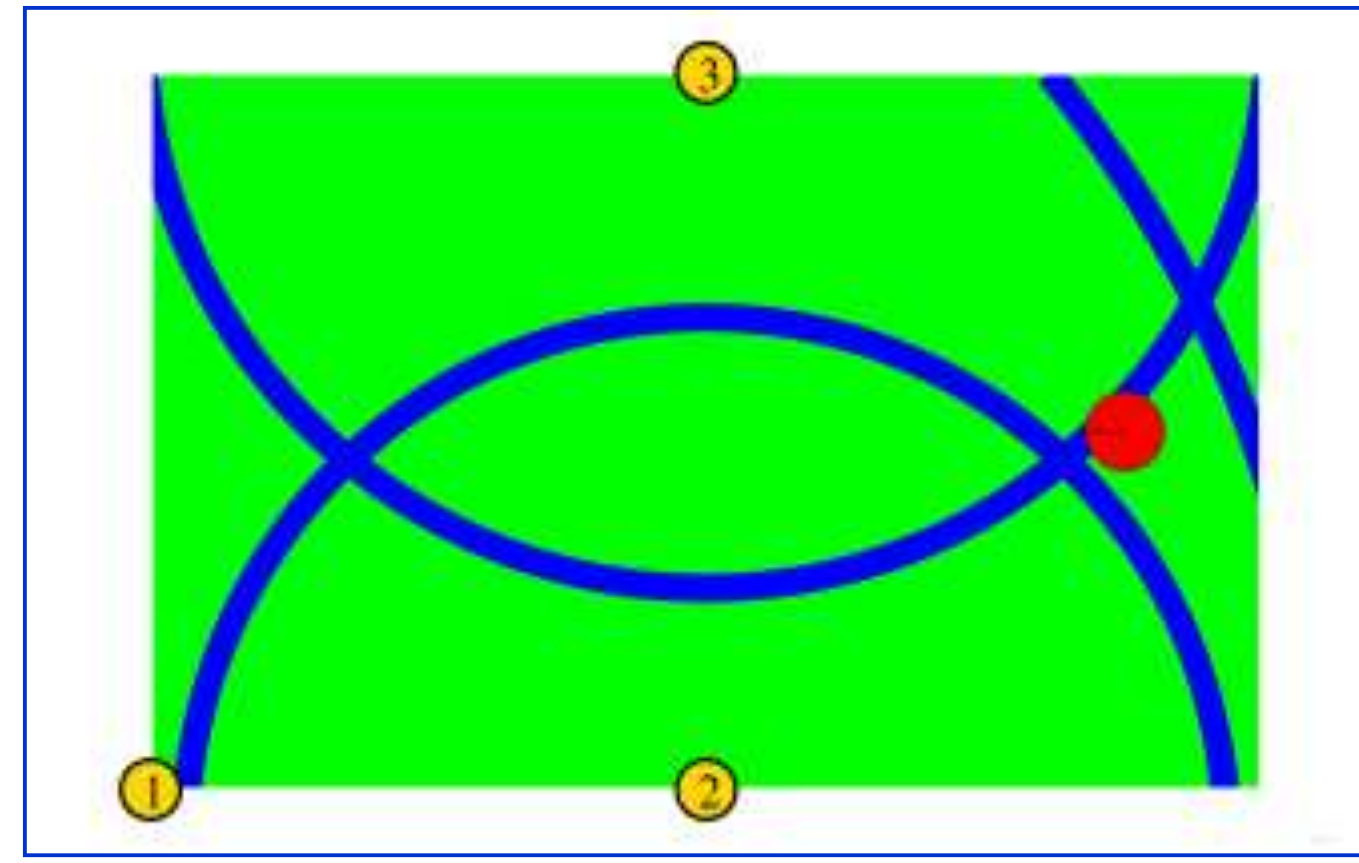

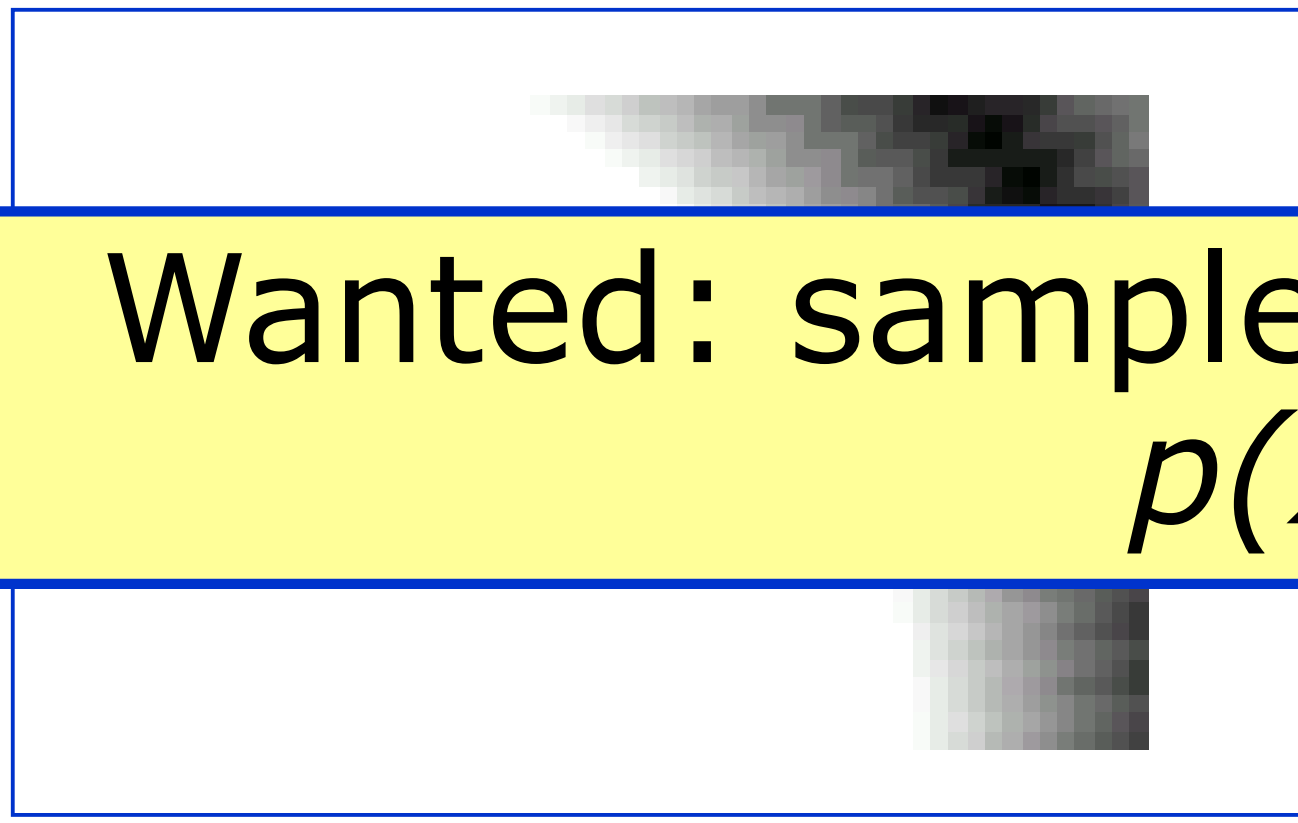

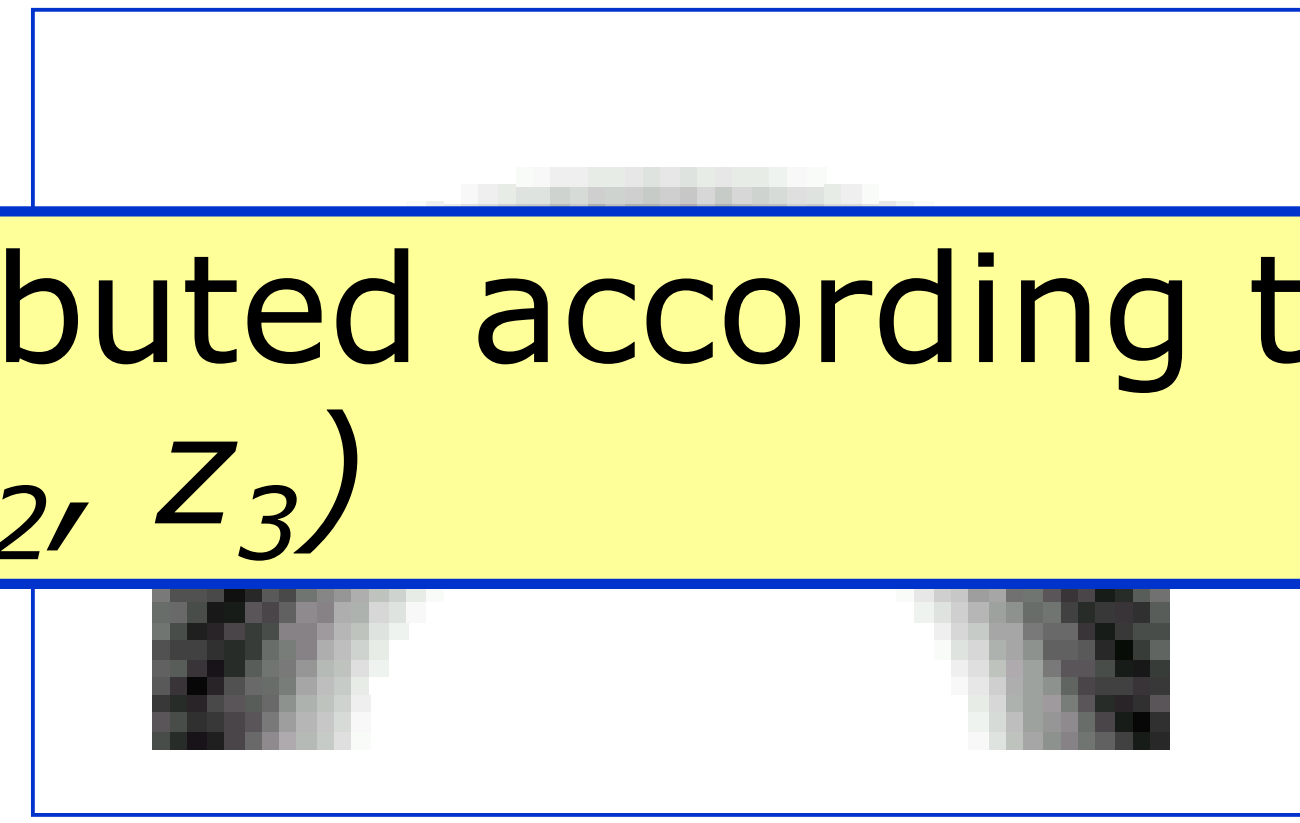

Wanted: samples distributed according to
$p(x|\ z_1, z_2, z_3)$

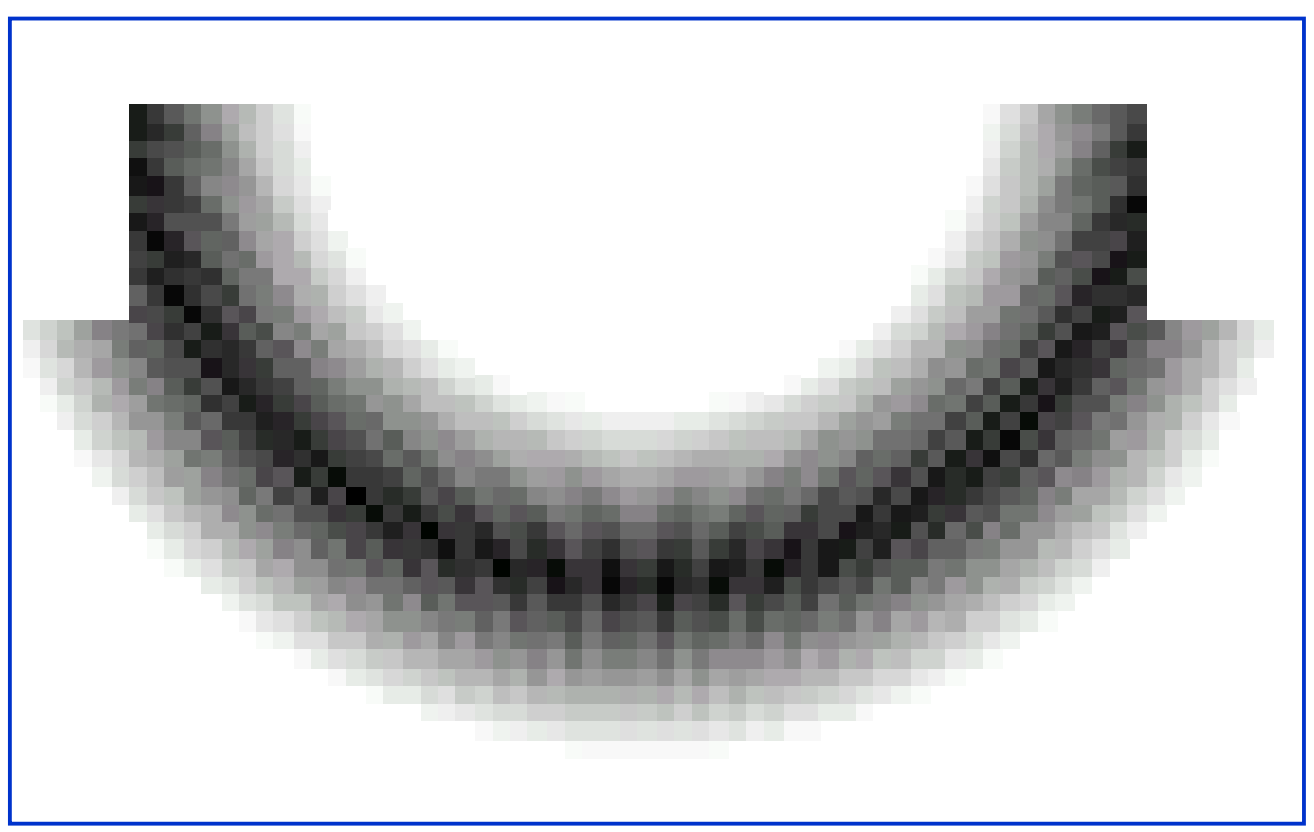



This is Easy!

We can draw samples from $p(x|z_l)$ by adding noise to the detection parameters.

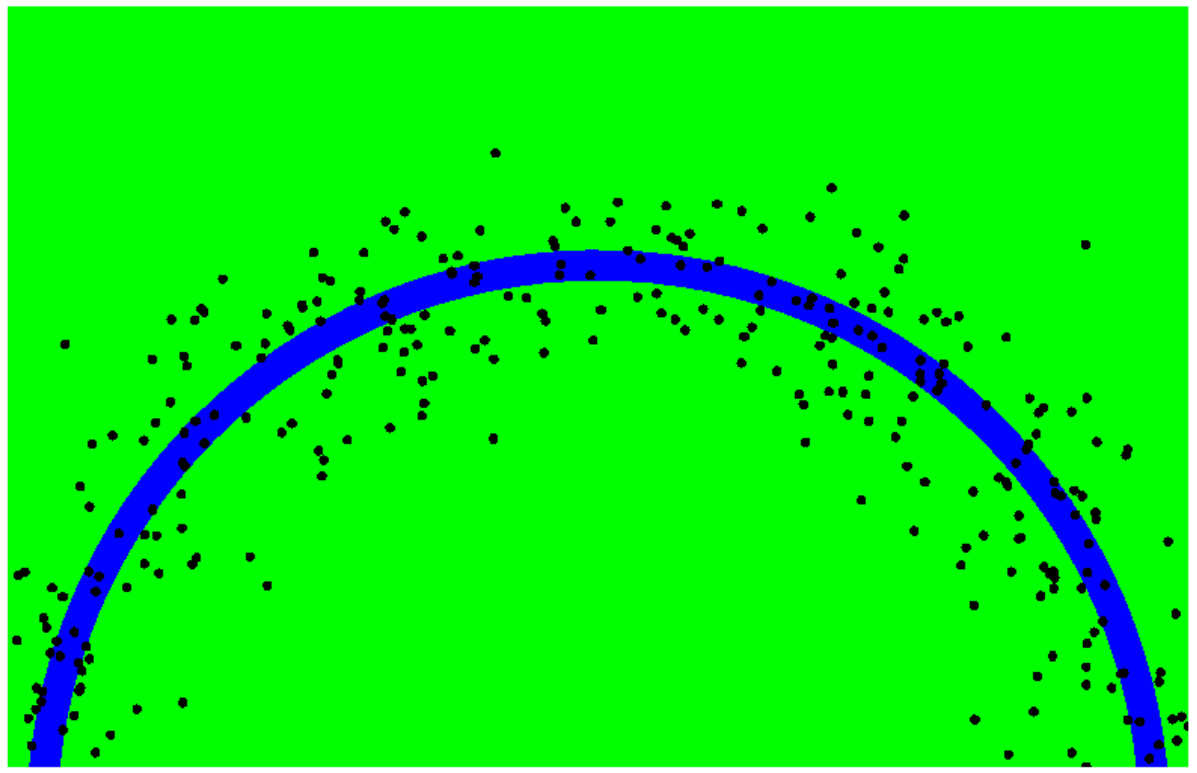

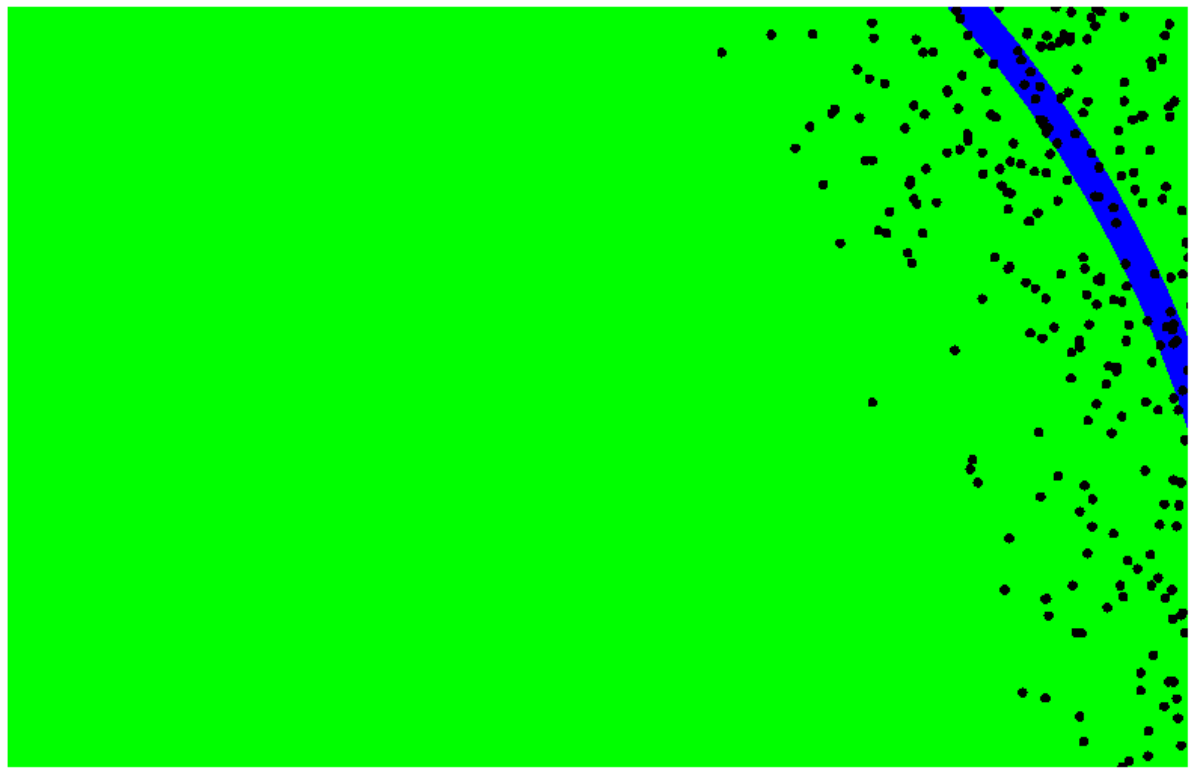

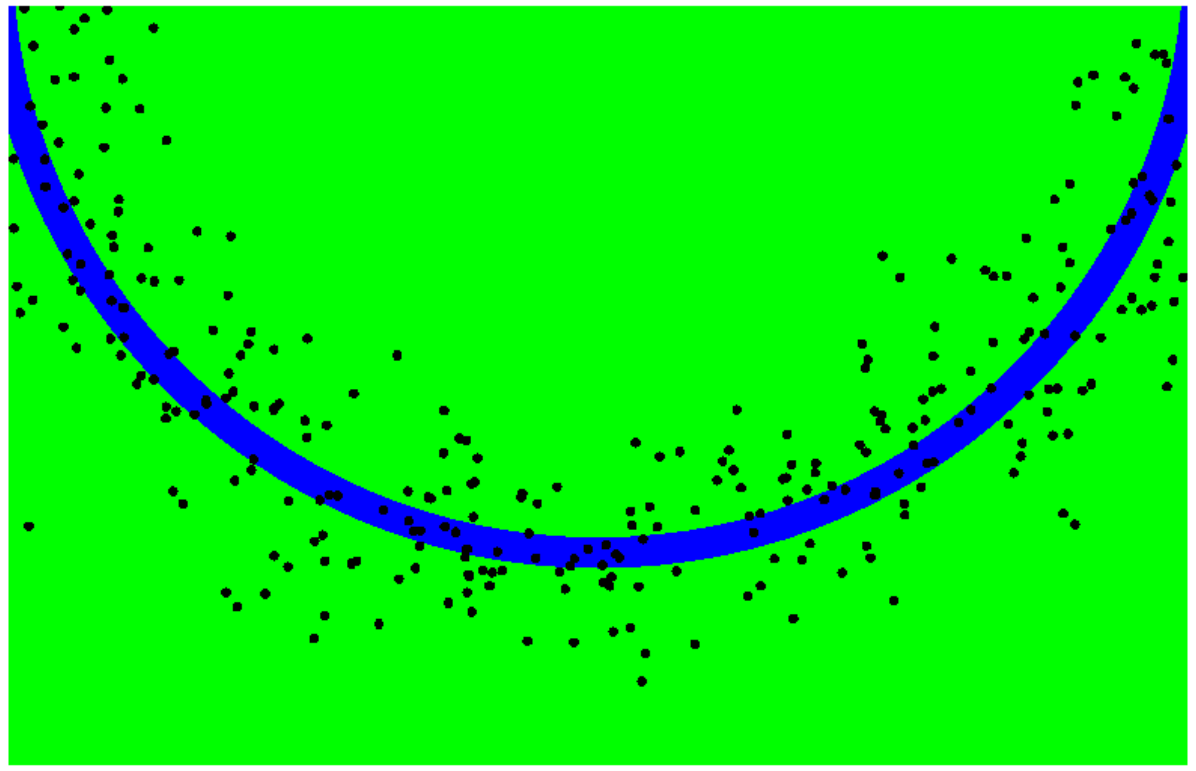

Importance Sampling with Resampling

$$\text{Target distribution f}: p(x \mid z_1, z_2, \ldots, z_n) = \frac{\prod_k p(z_k \mid x) \quad p(x)}{p(z_1, z_2, \ldots, z_n)}$$

$$\text{Sampling distribution g}: p(x \mid z_l) = \frac{p(z_l \mid x)\, p(x)}{p(z_l)}$$

$$\text{Importance weights w}: \frac{f}{g} = \frac{p(x \mid z_1, z_2, \ldots, z_n)}{p(x \mid z_l)} = \frac{p(z_l) \prod_{k \neq l} p(z_k \mid x)}{p(z_1, z_2, \ldots, z_n)}$$

Importance Sampling with Resampling

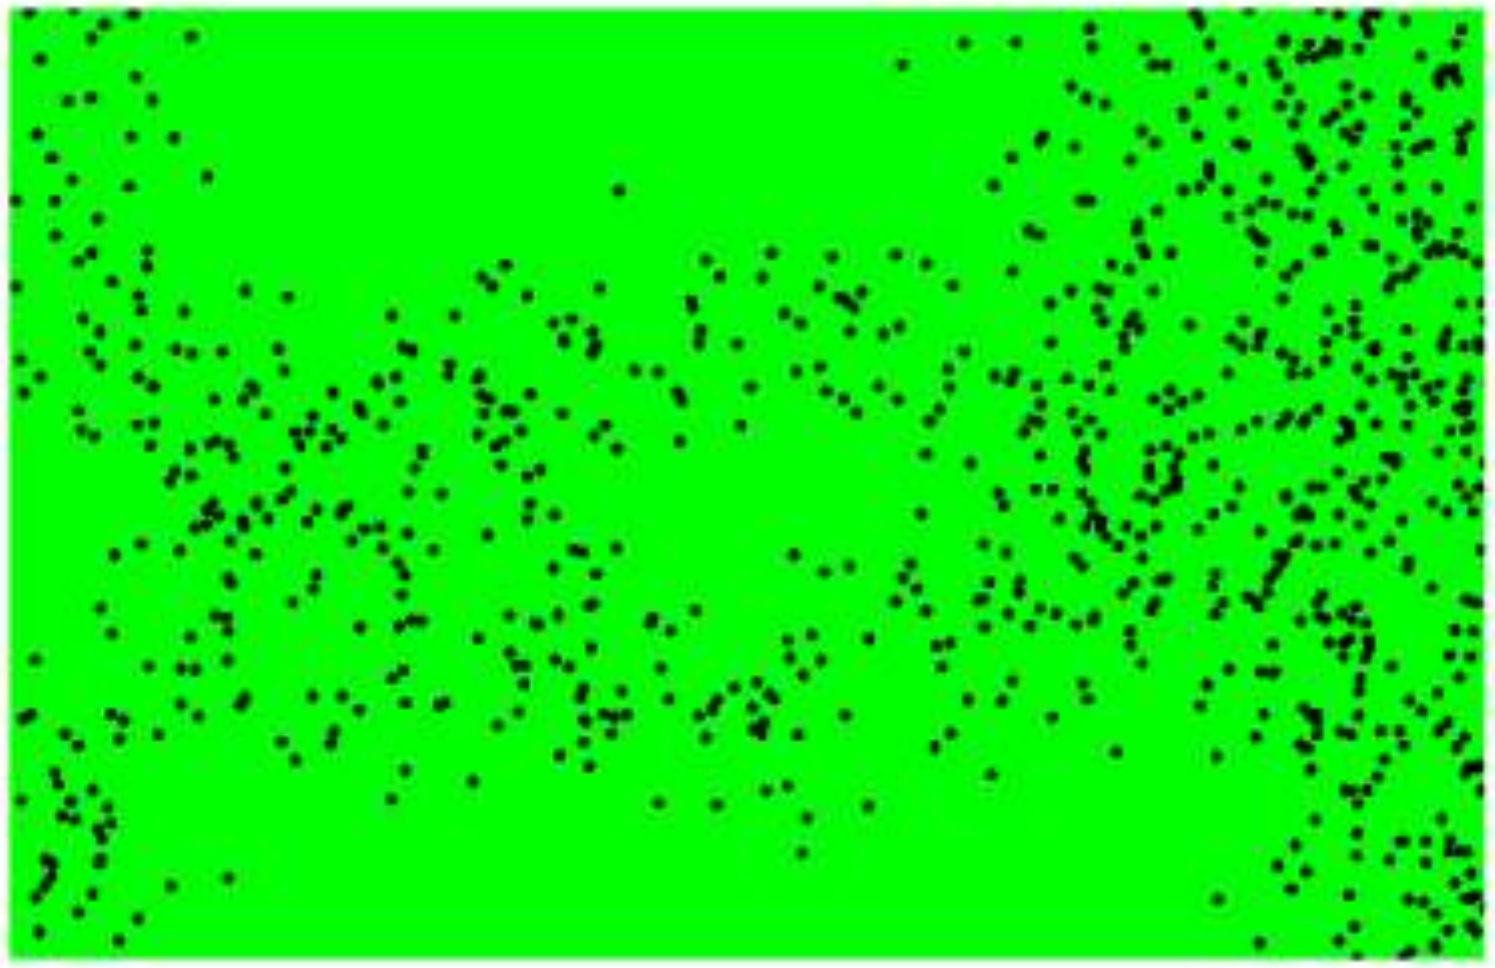

Weighted samples

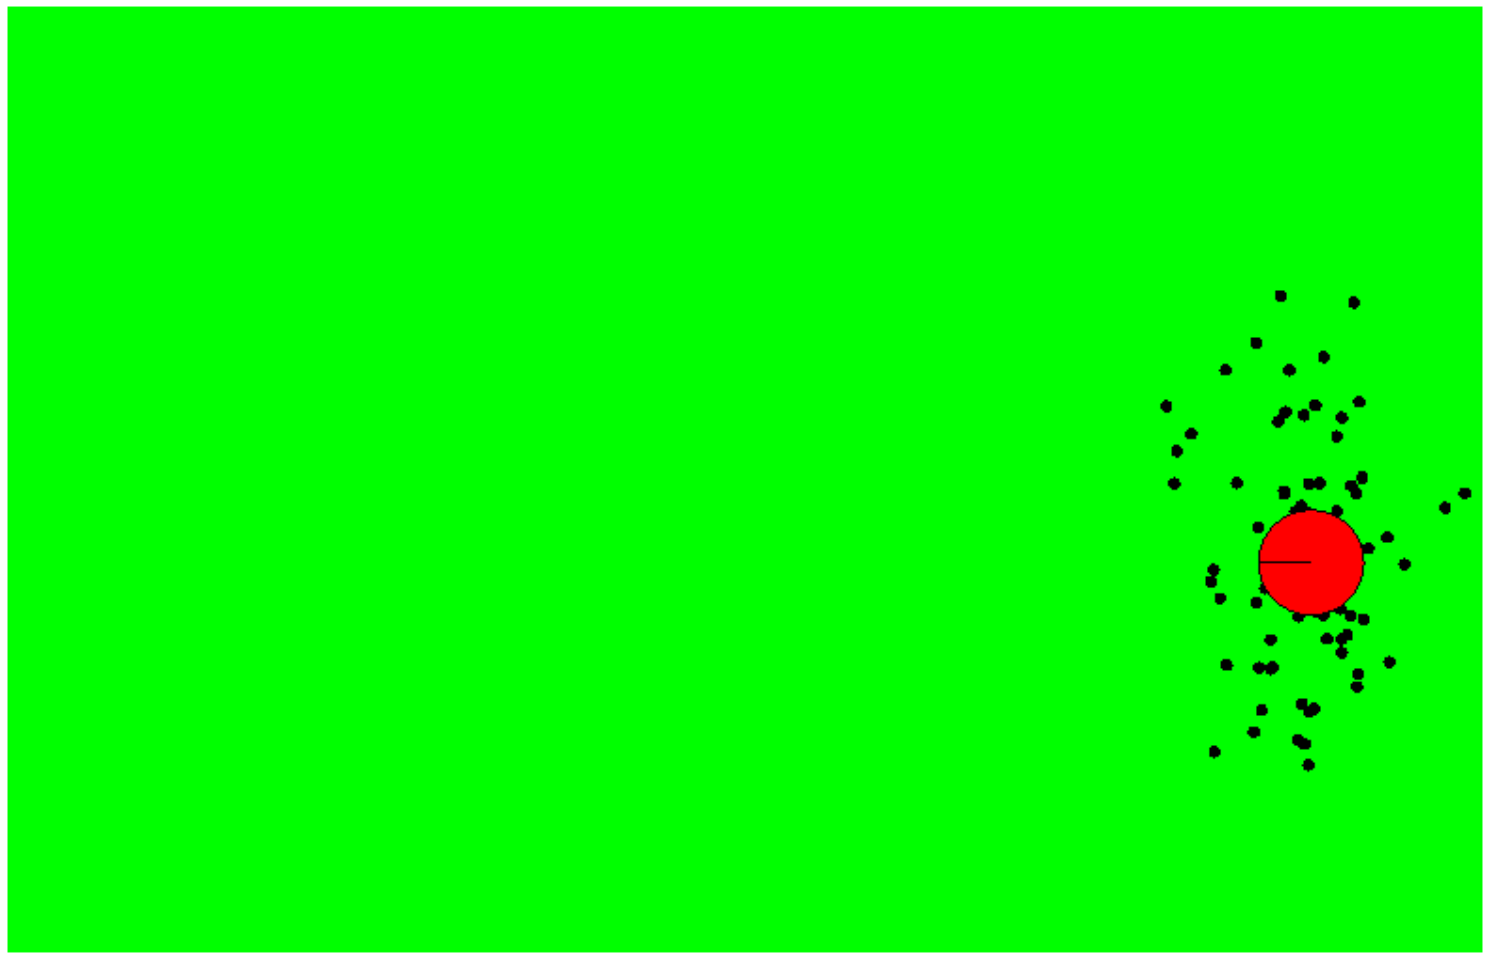

After resampling

Particle Filters

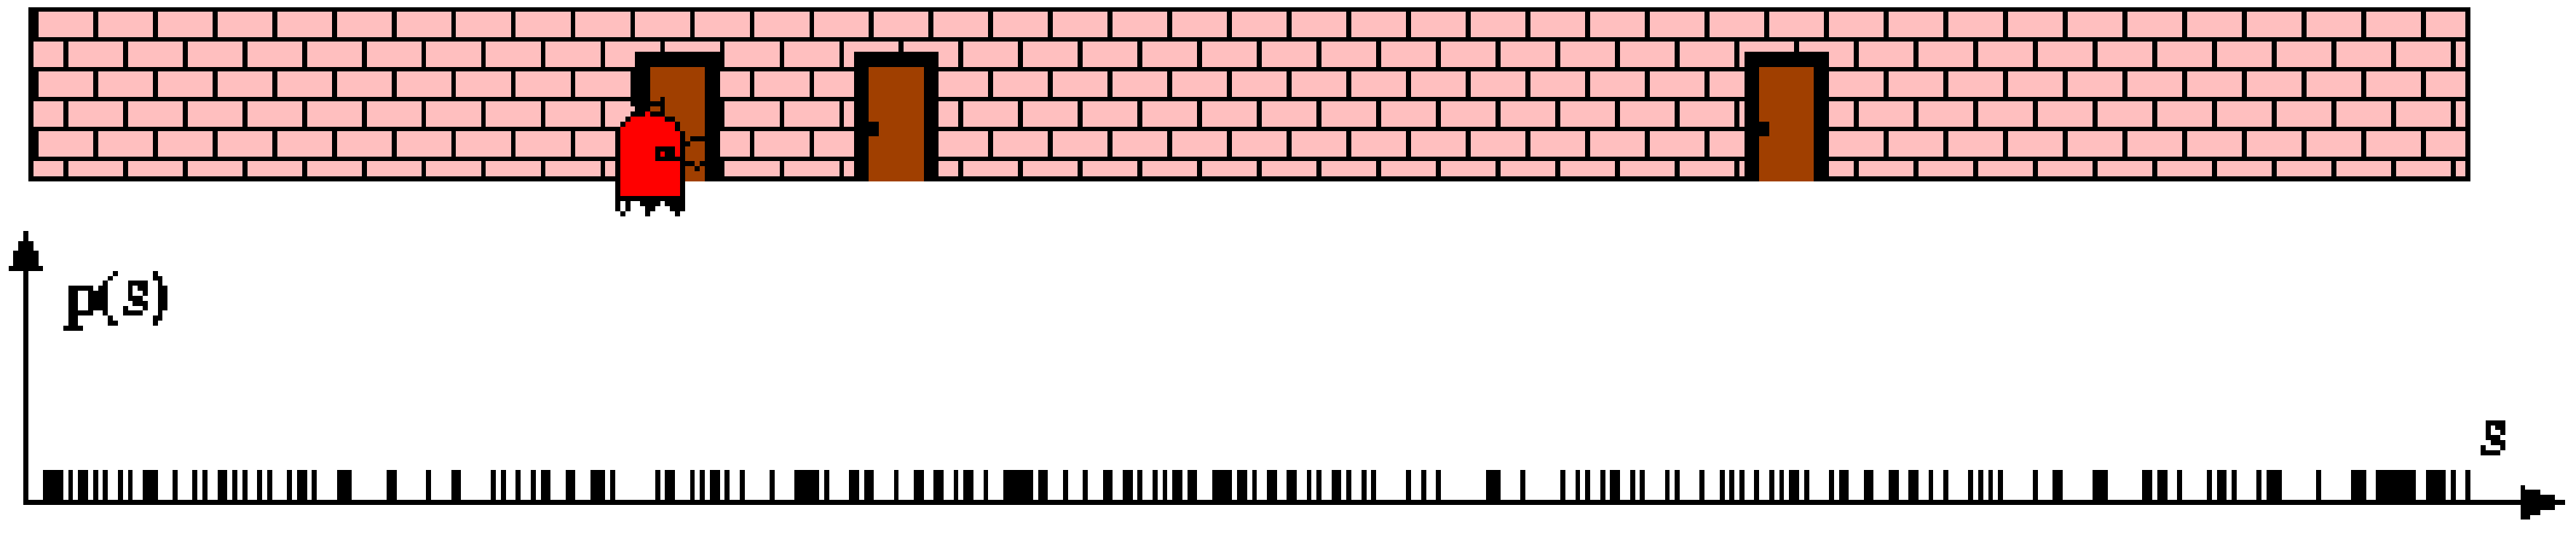

Sensor Information: Importance Sampling

$$Bel(x) \leftarrow \alpha\ p(z \mid x)\ Bel^{-}(x)$$

$$w \leftarrow \frac{\alpha\ p(z \mid x)\ Bel^{-}(x)}{Bel^{-}(x)} = \alpha\ p(z \mid x)$$

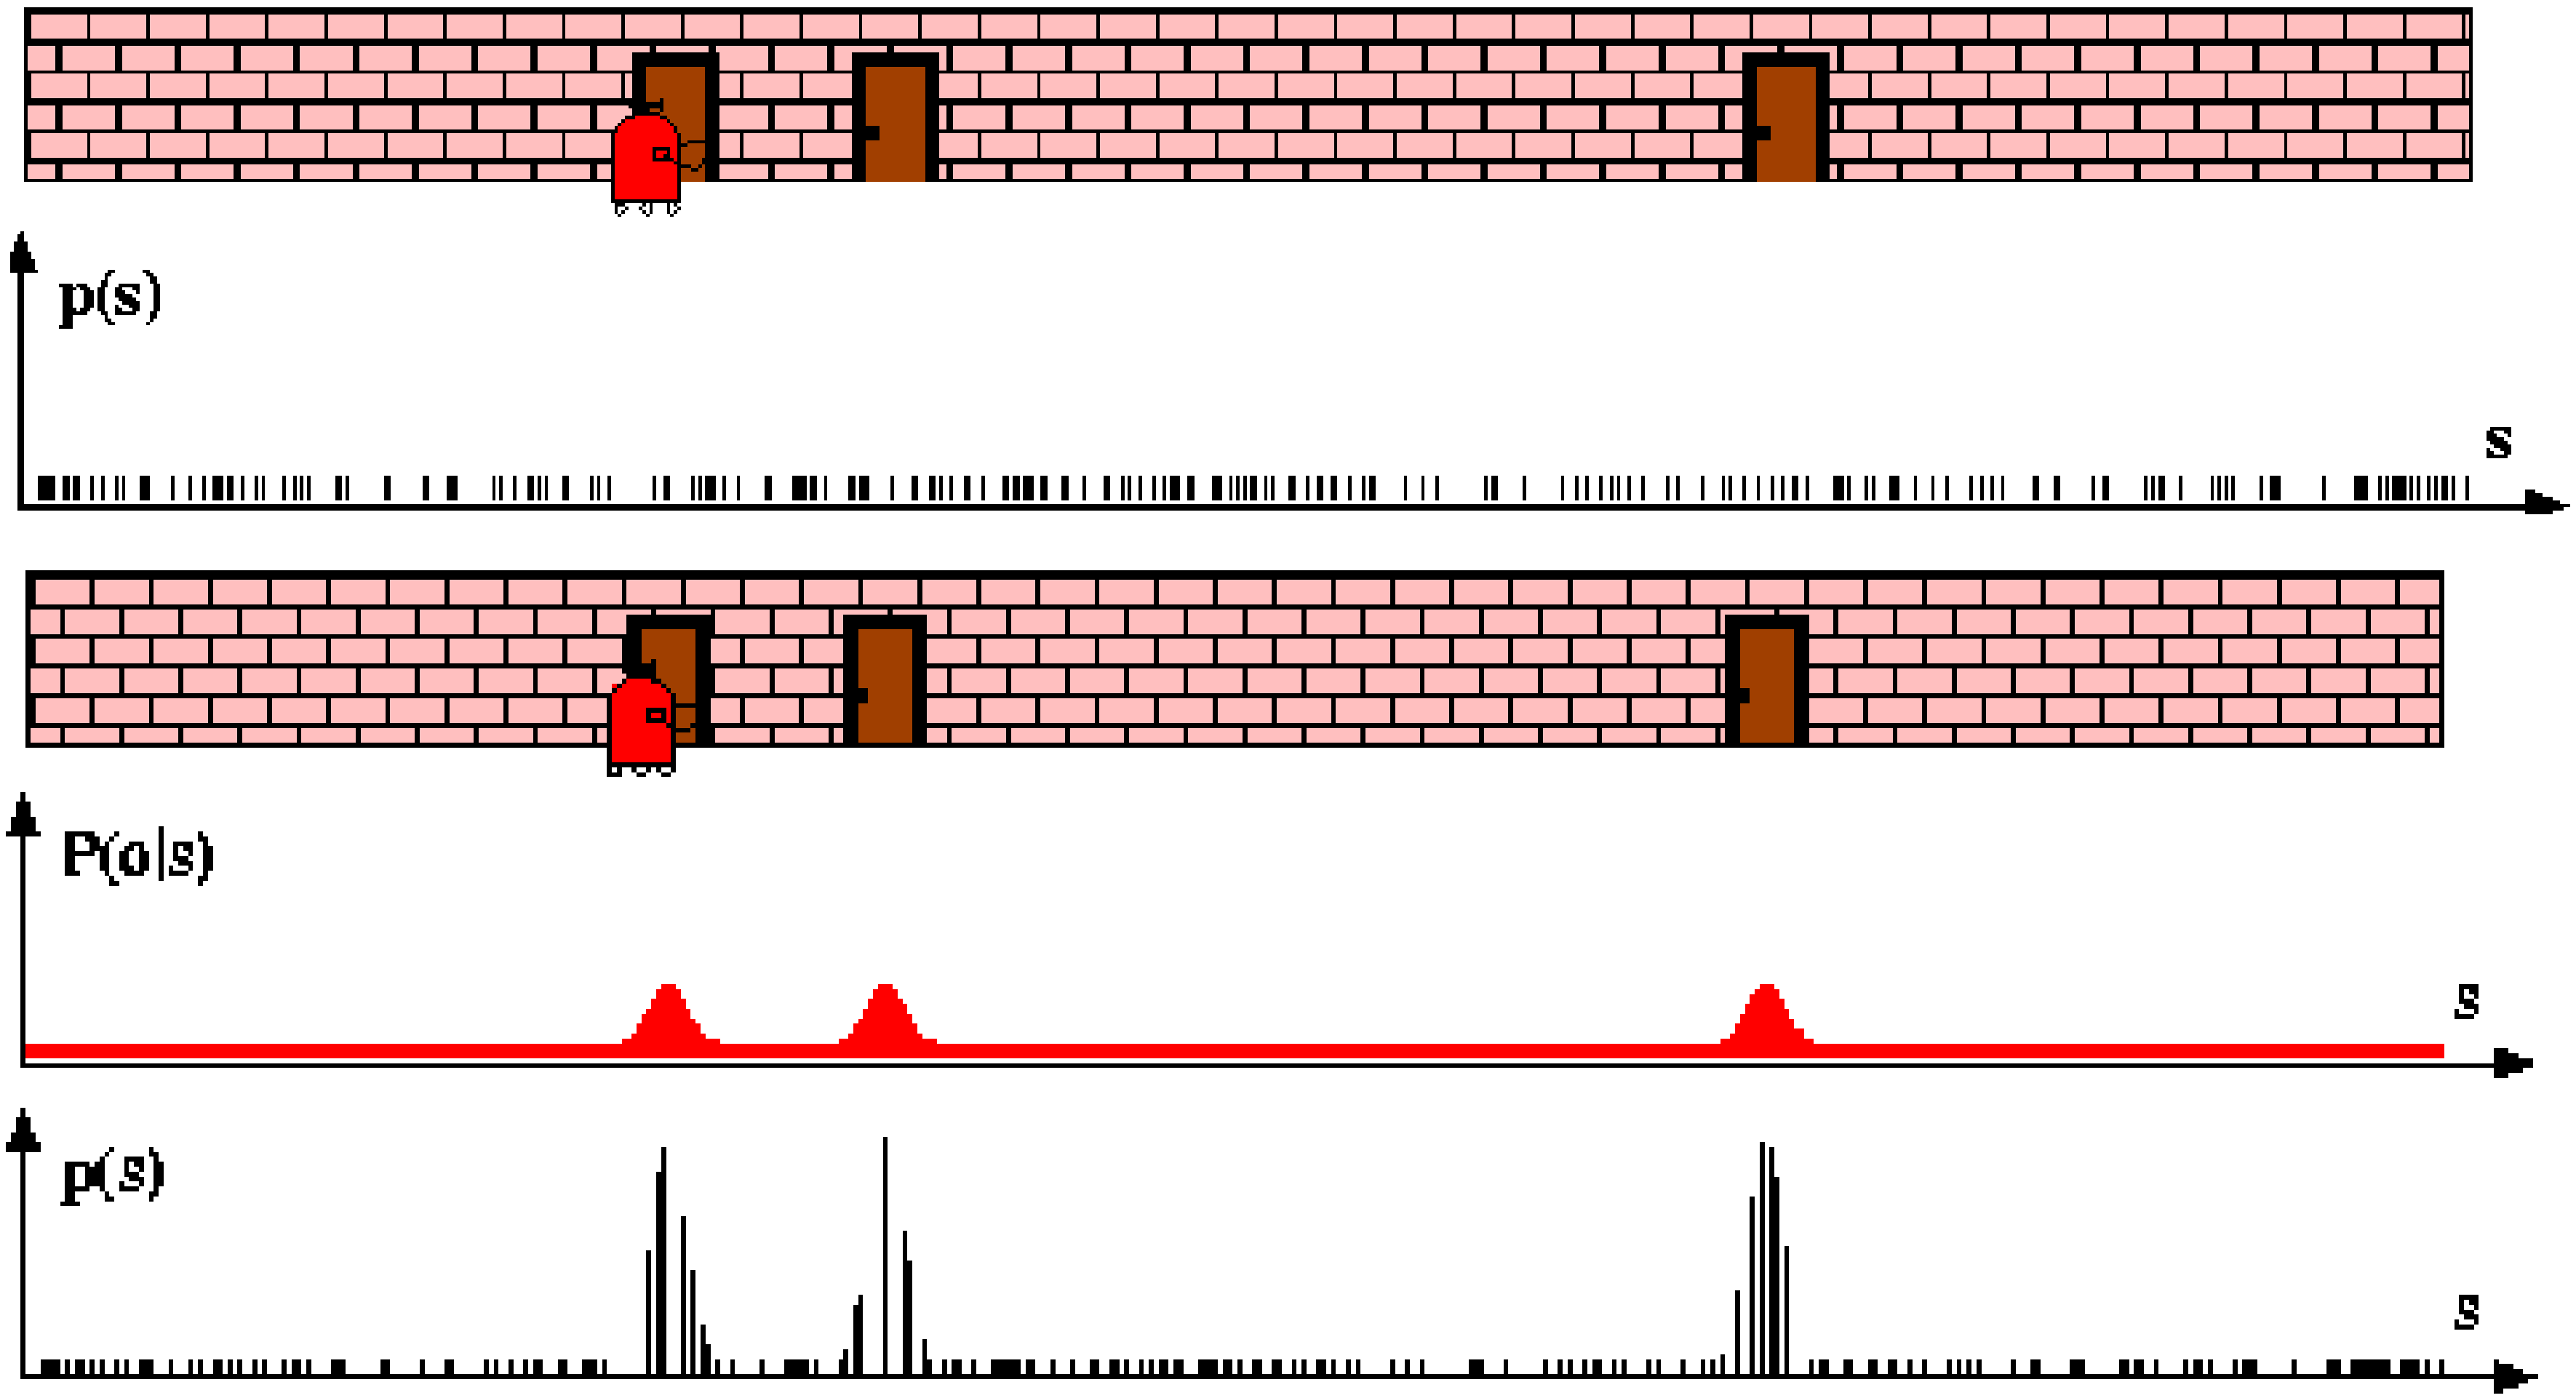

Robot Motion

$$Bel^{-}(x) \quad \leftarrow \quad \int p(x \mid u, x')\, Bel(x')\ \mathrm{d}x'$$

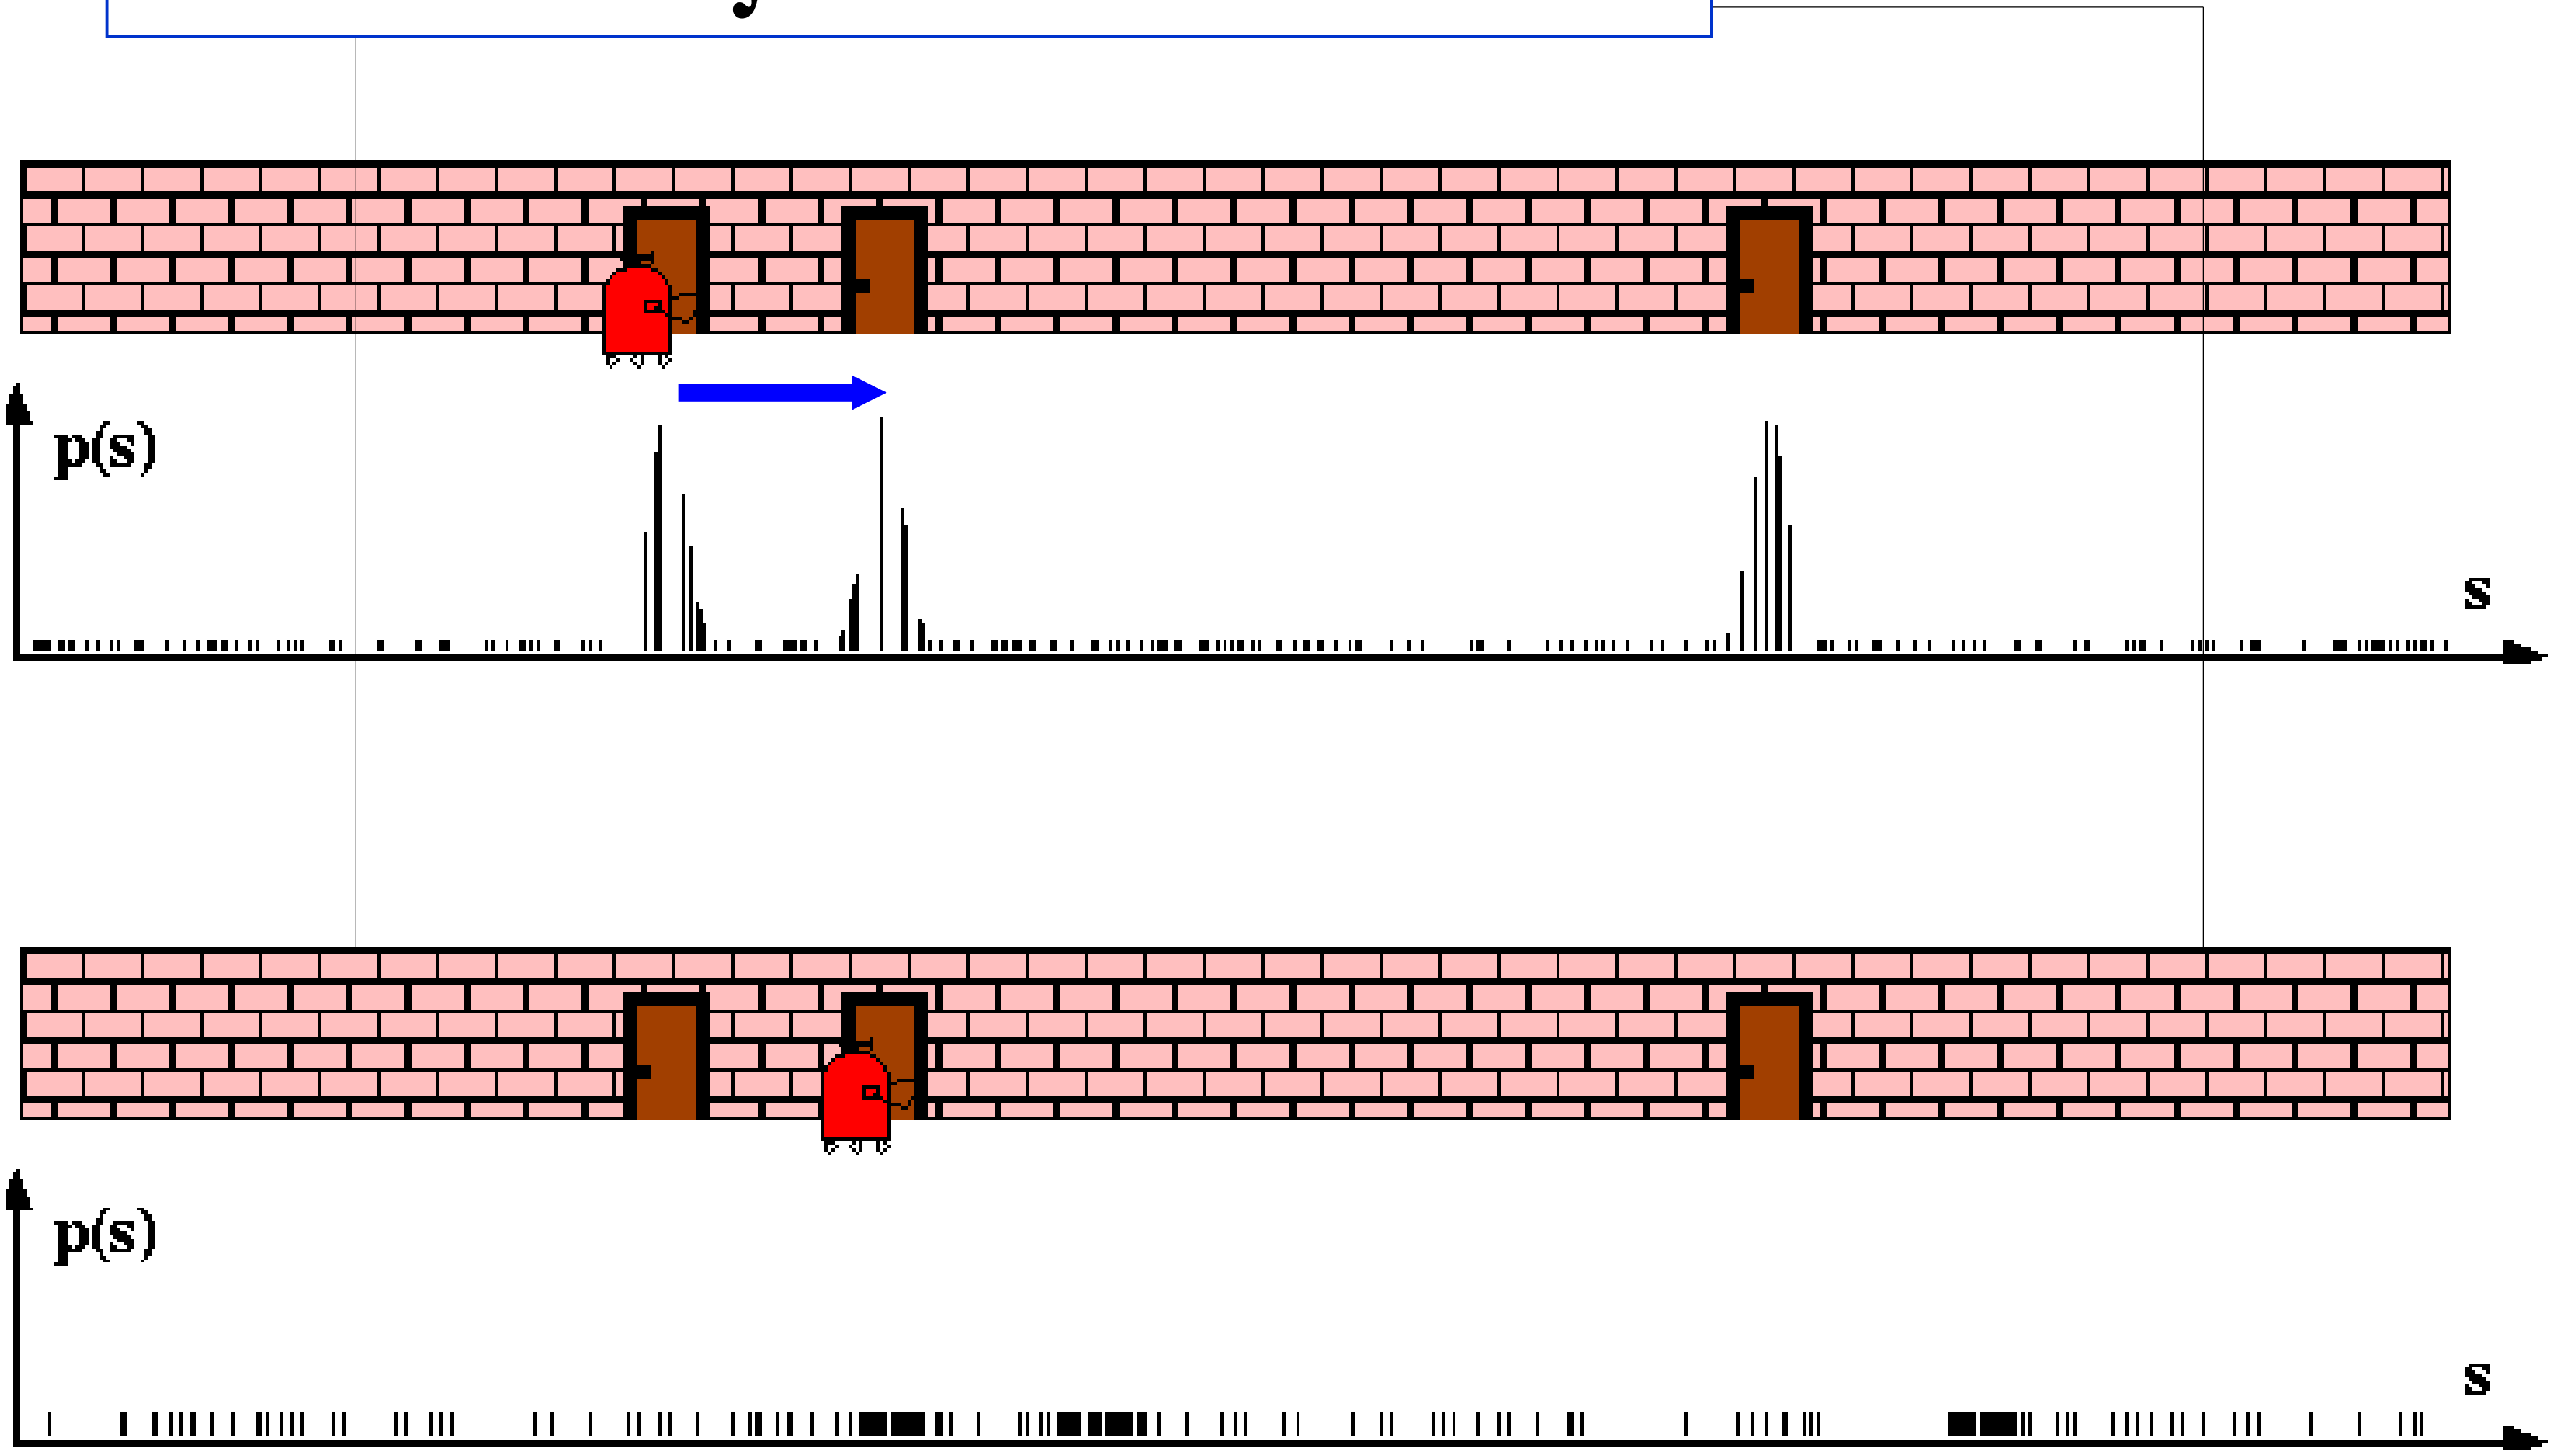

Sensor Information: Importance Sampling

$$Bel(x) \leftarrow \alpha\ p(z \mid x)\ Bel^{-}(x)$$

$$w \leftarrow \frac{\alpha\ p(z \mid x)\ Bel^{-}(x)}{Bel^{-}(x)} = \alpha\ p(z \mid x)$$

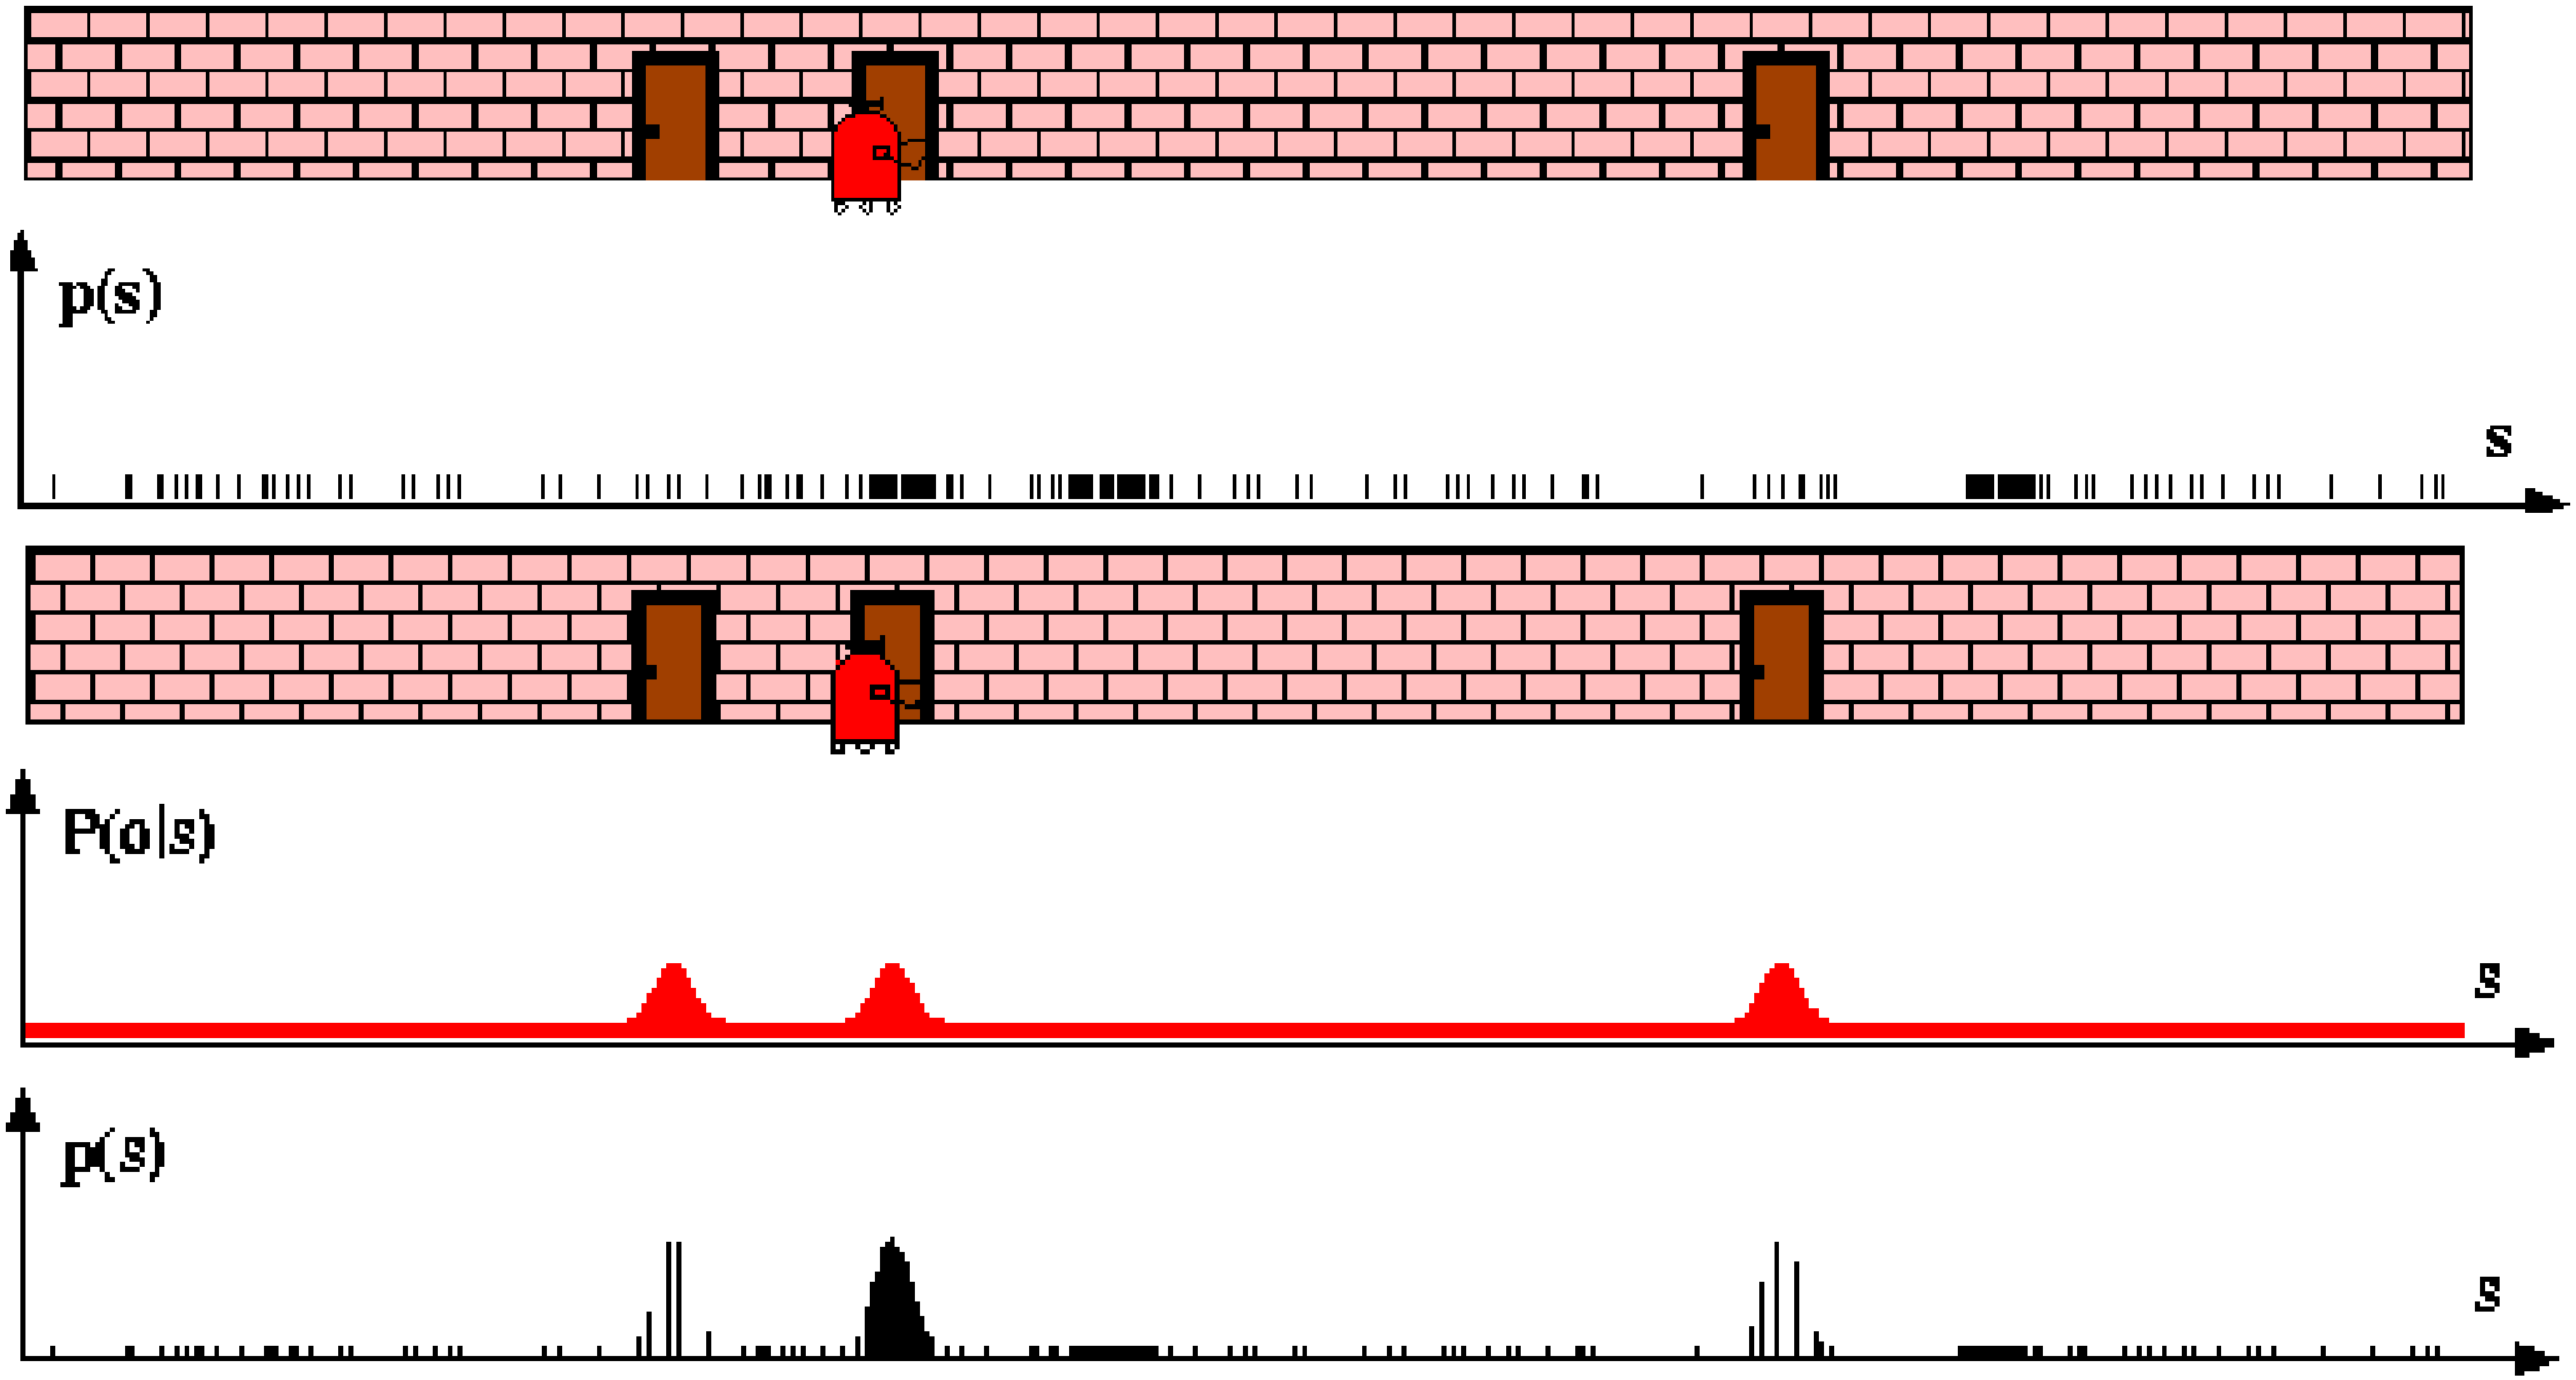

Robot Motion

$$Bel^{-}(x) \quad \leftarrow \quad \int p(x \mid u, x')\, Bel(x')\ \mathrm{d}x'$$

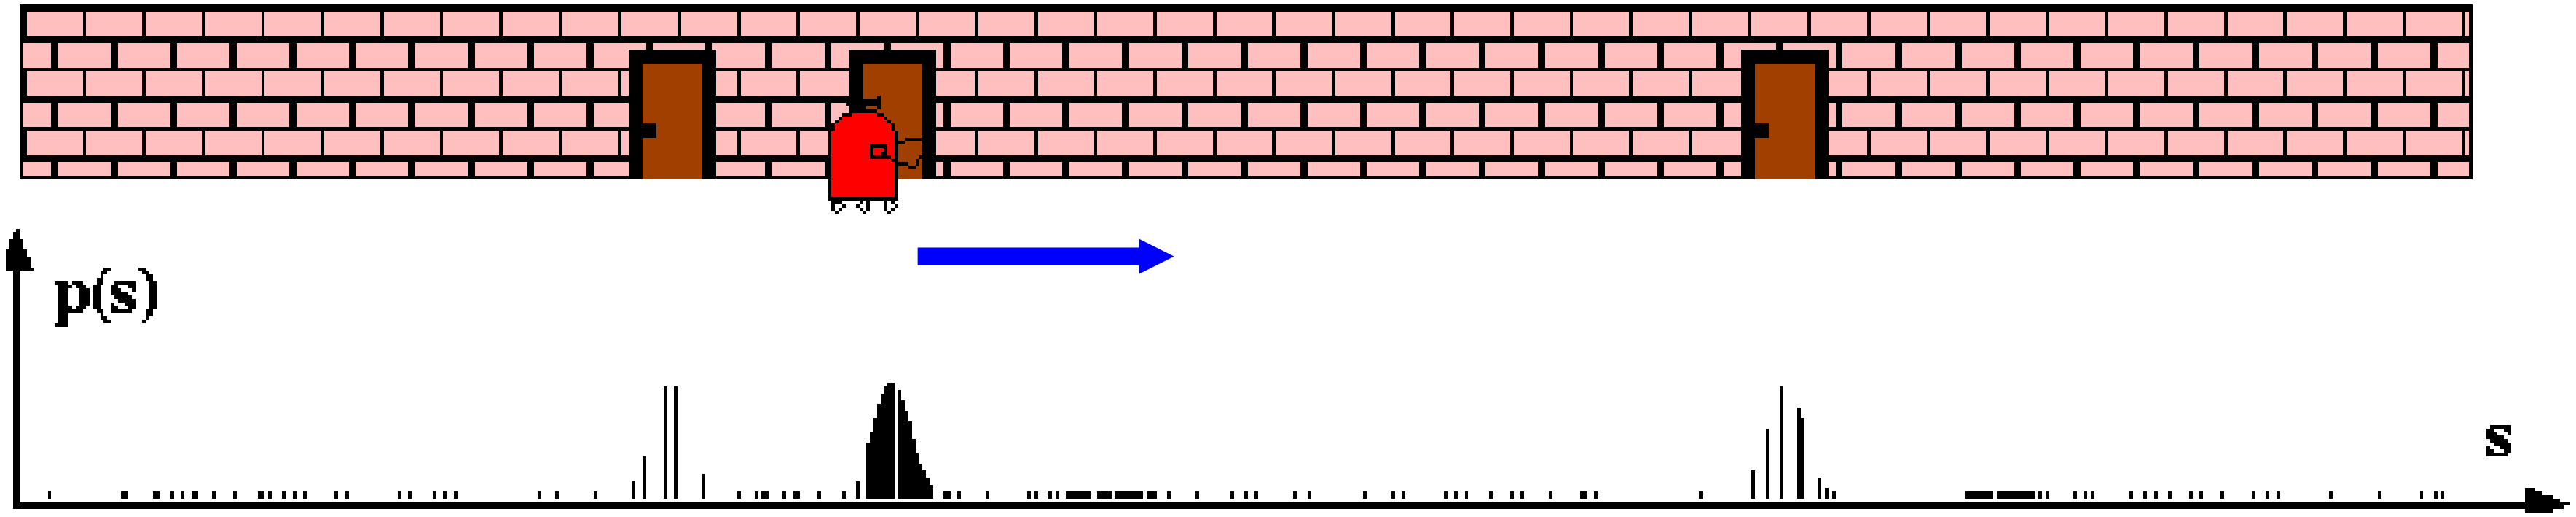

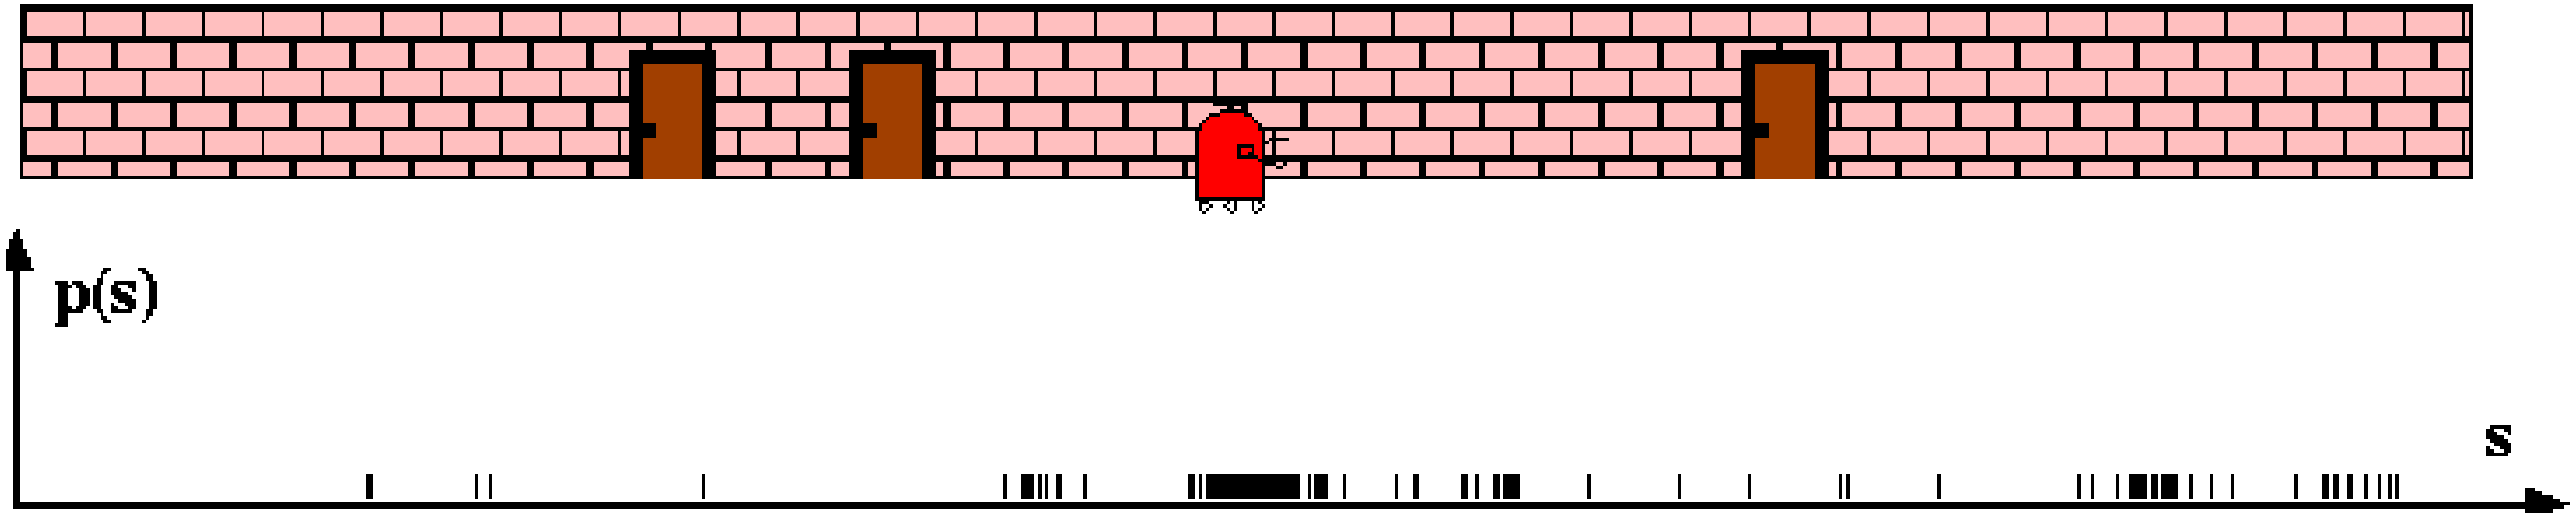

Particle Filter Algorithm

1. Algorithm **particle_filter**(S_{t-1}, u_{t-1} z_t):
2. $S_t = \emptyset, \quad \eta = 0$
3. **For** $i = 1 \ldots n$ ***Generate new samples***
4. Sample index *j(i)* from the discrete distribution given by w_{t-1}
5. Sample x_t^i from $p(x_t \mid x_{t-1}, u_{t-1})$ using $x_{t-1}^{j(i)}$ and u_{t-1}
6. $w_t^i = p(z_t \mid x_t^i)$ ***Compute importance weight***
7. $\eta = \eta + w_t^i$ ***Update normalization factor***
8. $S_t = S_t \cup \{< x_t^i, w_t^i >\}$ ***Insert***
9. **For** $i = 1 \ldots n$
10. $w_t^i = w_t^i / \eta$ ***Normalize weights***

Particle Filter Algorithm

$$\boxed{Bel(x_t) = \eta\, p(z_t \mid x_t) \int p(x_t \mid x_{t-1}, u_{t-1})\, Bel(x_{t-1})\, dx_{t-1}}$$

draw x^i_{t-1} from $Bel(x_{t-1})$

draw x^i_t from $p(x_t \mid x^i_{t-1}, u_{t-1})$

Importance factor for x^i_t:

$$w^i_t = \frac{\text{target distribution}}{\text{proposal distribution}}$$

$$= \frac{\eta\, p(z_t \mid x_t)\, p(x_t \mid x_{t-1}, u_{t-1})\, Bel(x_{t-1})}{p(x_t \mid x_{t-1}, u_{t-1})\, Bel(x_{t-1})}$$

$$\propto p(z_t \mid x_t)$$

Resampling

- **Given**: Set S of weighted samples.

- **Wanted** : Random sample, where the probability of drawing x_i is given by w_i.

- Typically done n times with replacement to generate new sample set S'.

Resampling

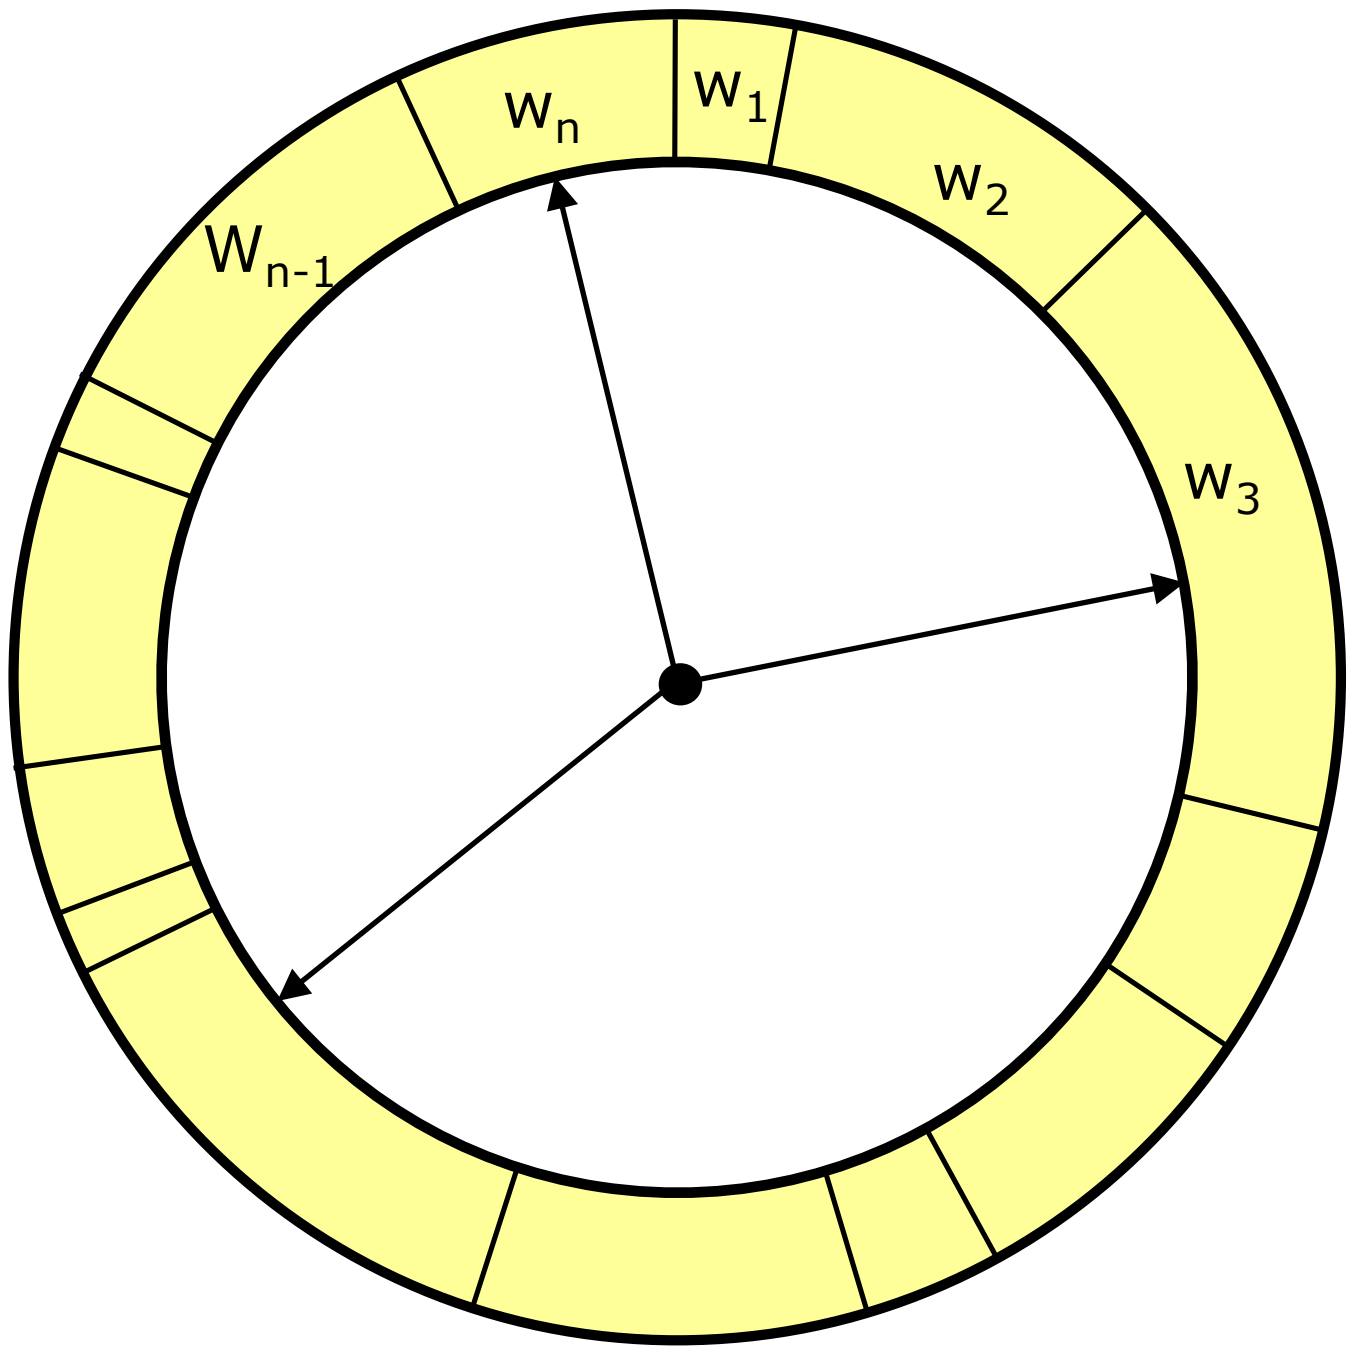

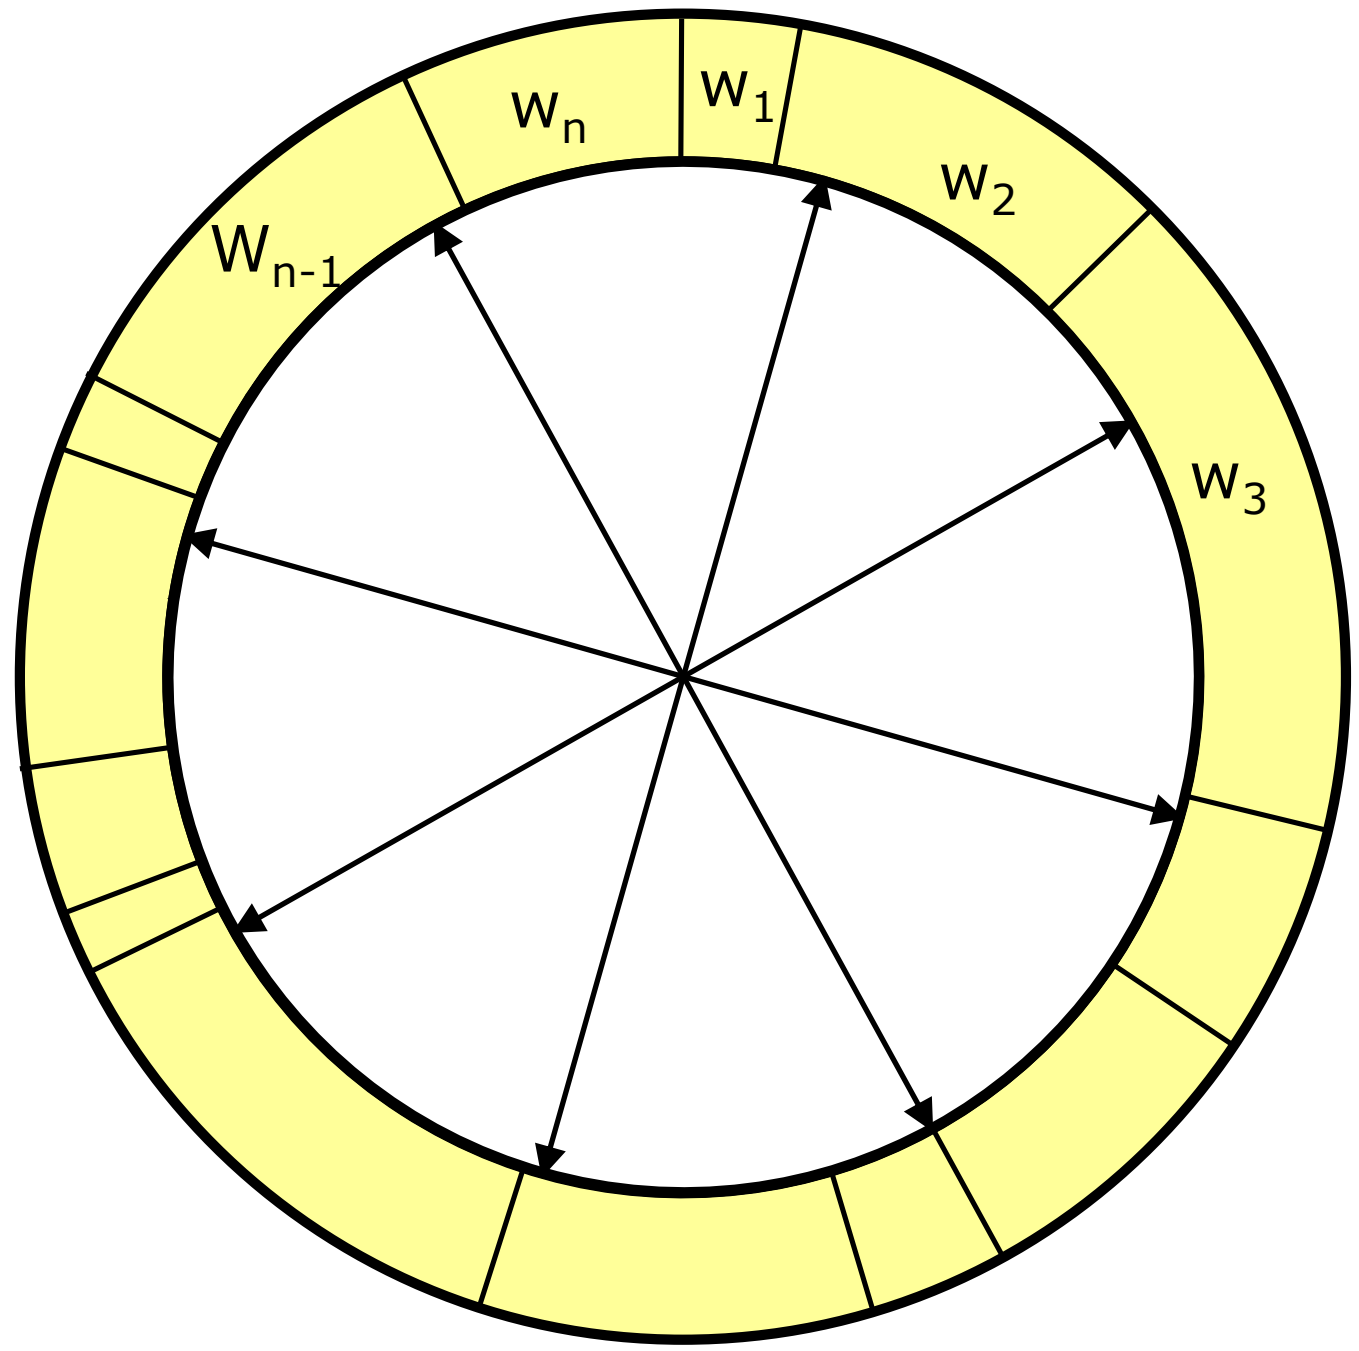

- Roulette wheel
- Binary search, n log n

- Stochastic universal sampling
- Systematic resampling
- Linear time complexity
- Easy to implement, low variance

Resampling Algorithm

1. Algorithm **systematic_resampling**(*S*,*n*):

2. $S' = \emptyset, c_1 = w^1$
3. **For** $i = 2 \ldots n$ — ***Generate cdf***
4. $c_i = c_{i-1} + w^i$
5. $u_1 \sim U]0, n^{-1}], i = 1$ — ***Initialize threshold***

6. **For** $j = 1 \ldots n$ — ***Draw samples …***
7. **While** ($u_j > c_i$) — ***Skip until next threshold reached***
8. $i = i + 1$
9. $S' = S' \cup \left\{ < x^i, n^{-1} > \right\}$ — ***Insert***
10. $u_{j+1} = u_j + n^{-1}$ — ***Increment threshold***

11. **Return** *S'*

Also called **stochastic universal sampling**

Motion Model Reminder

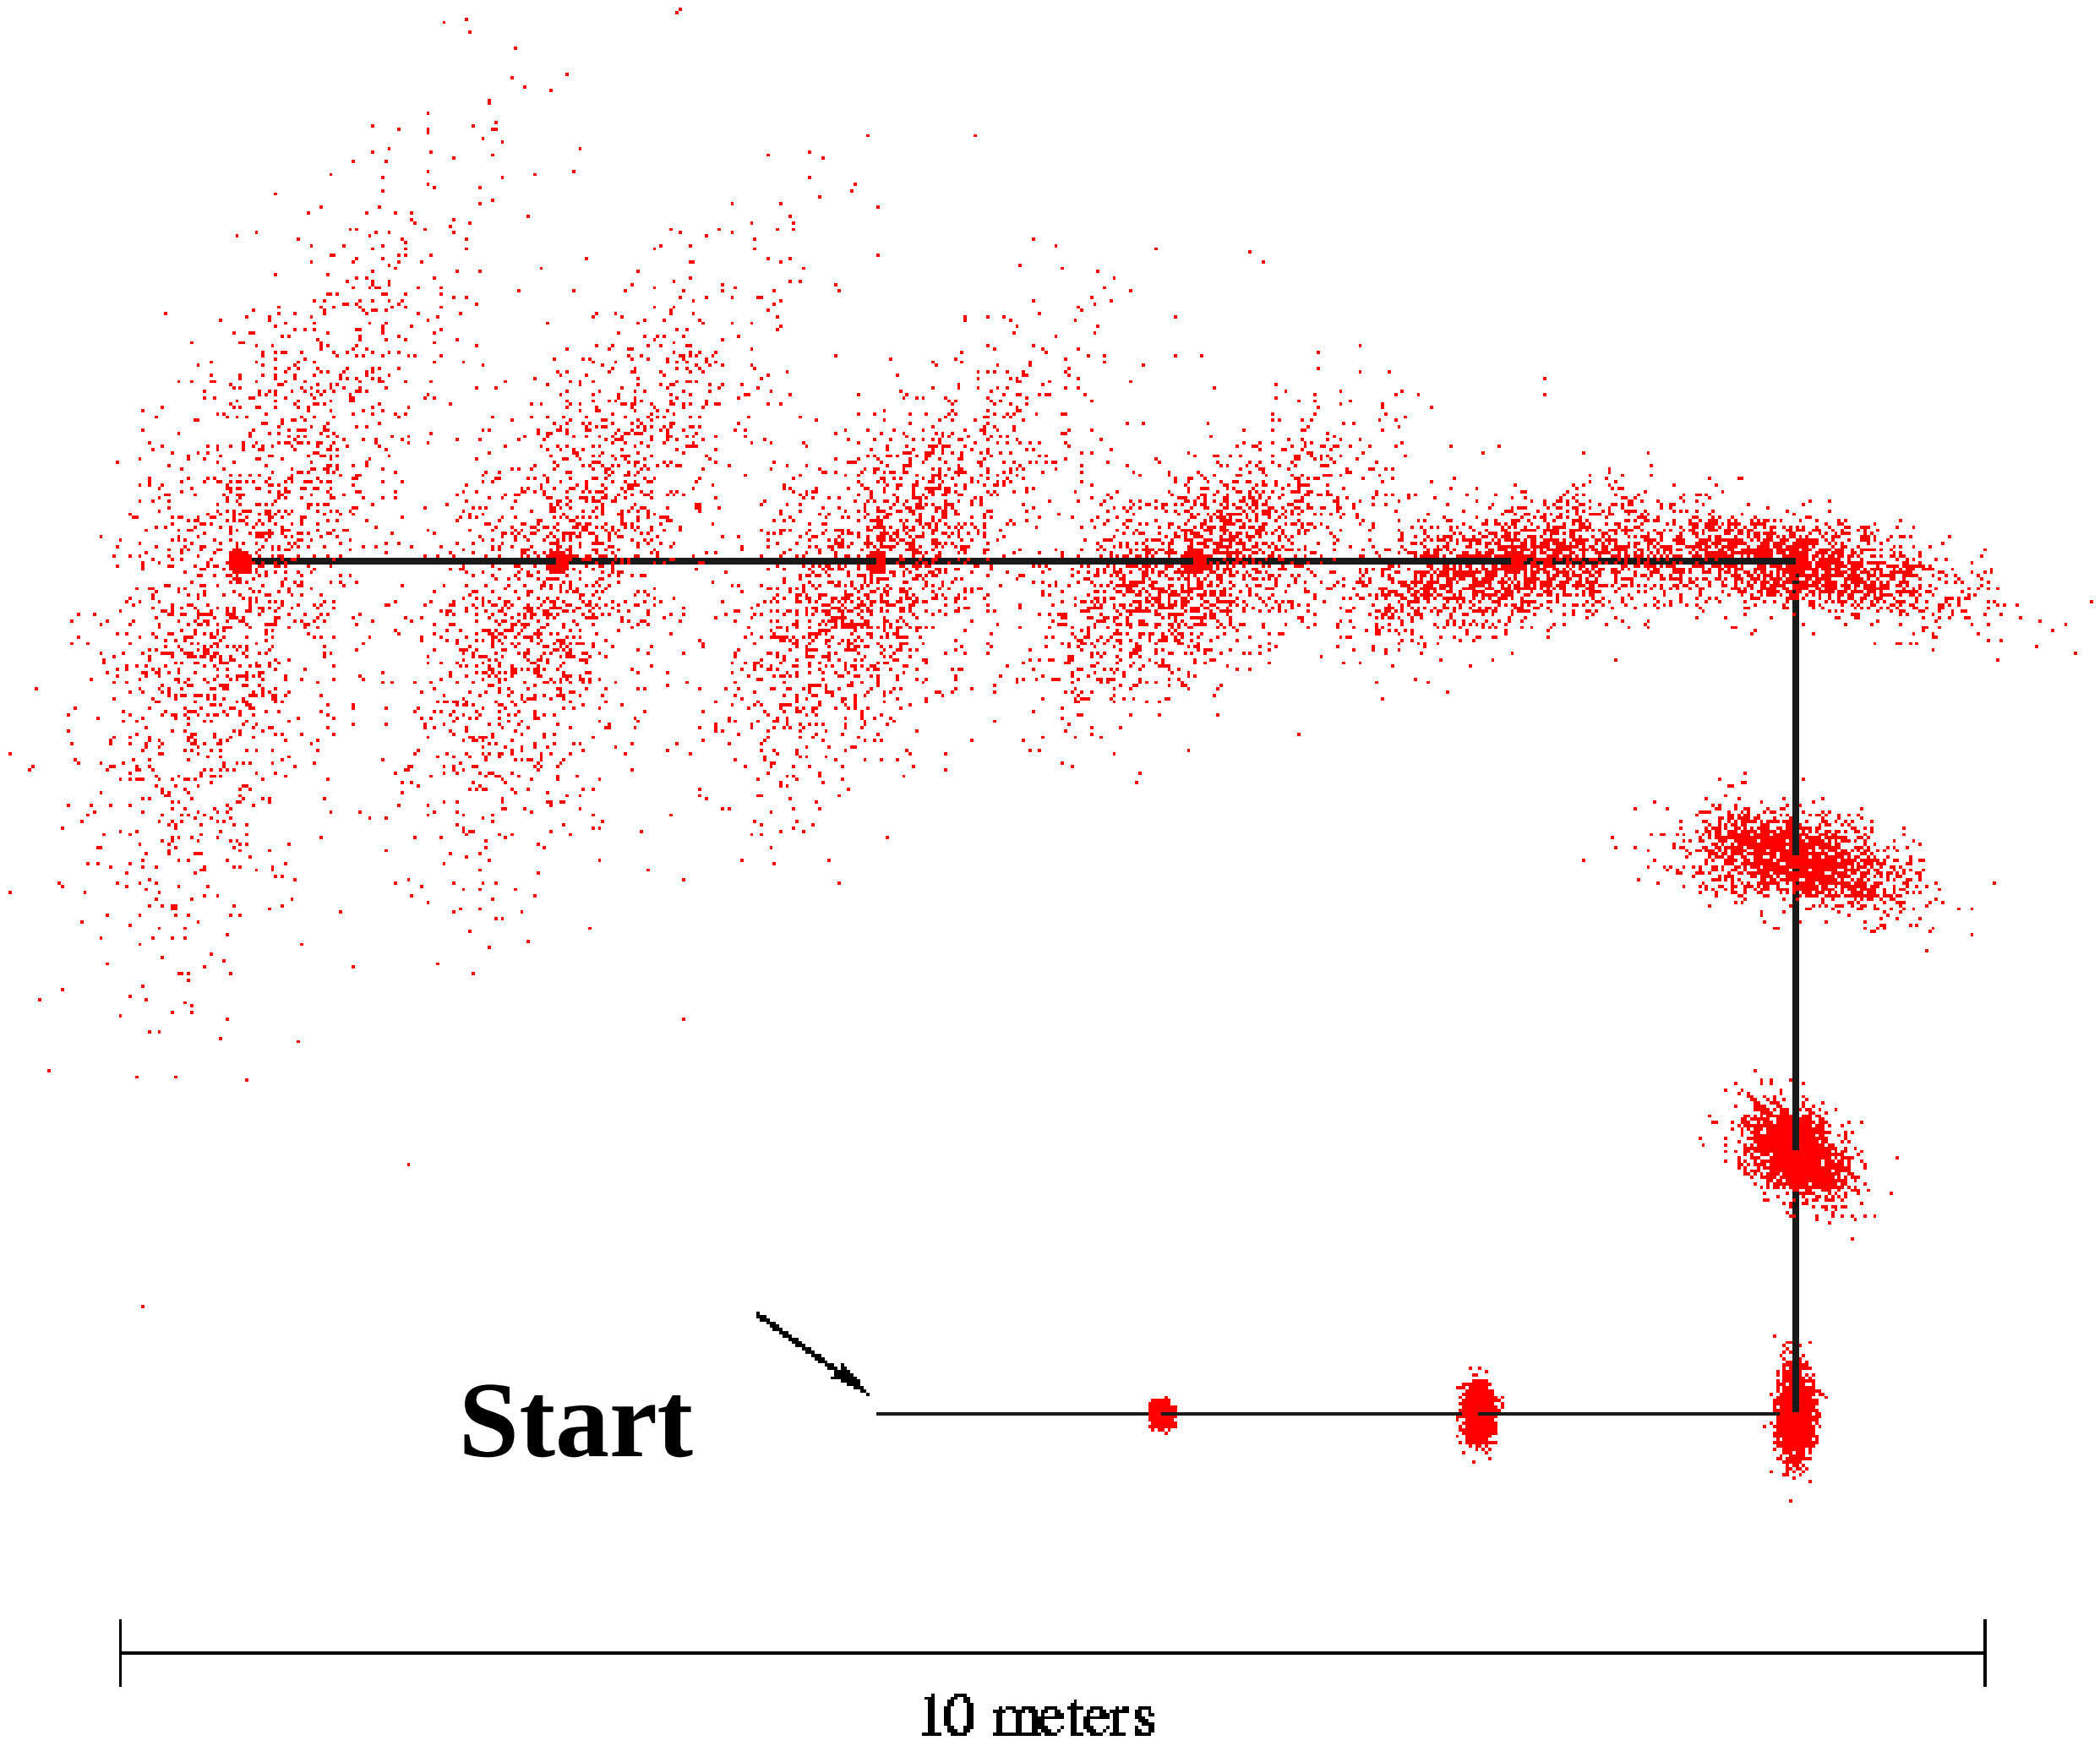

Proximity Sensor Model Reminder

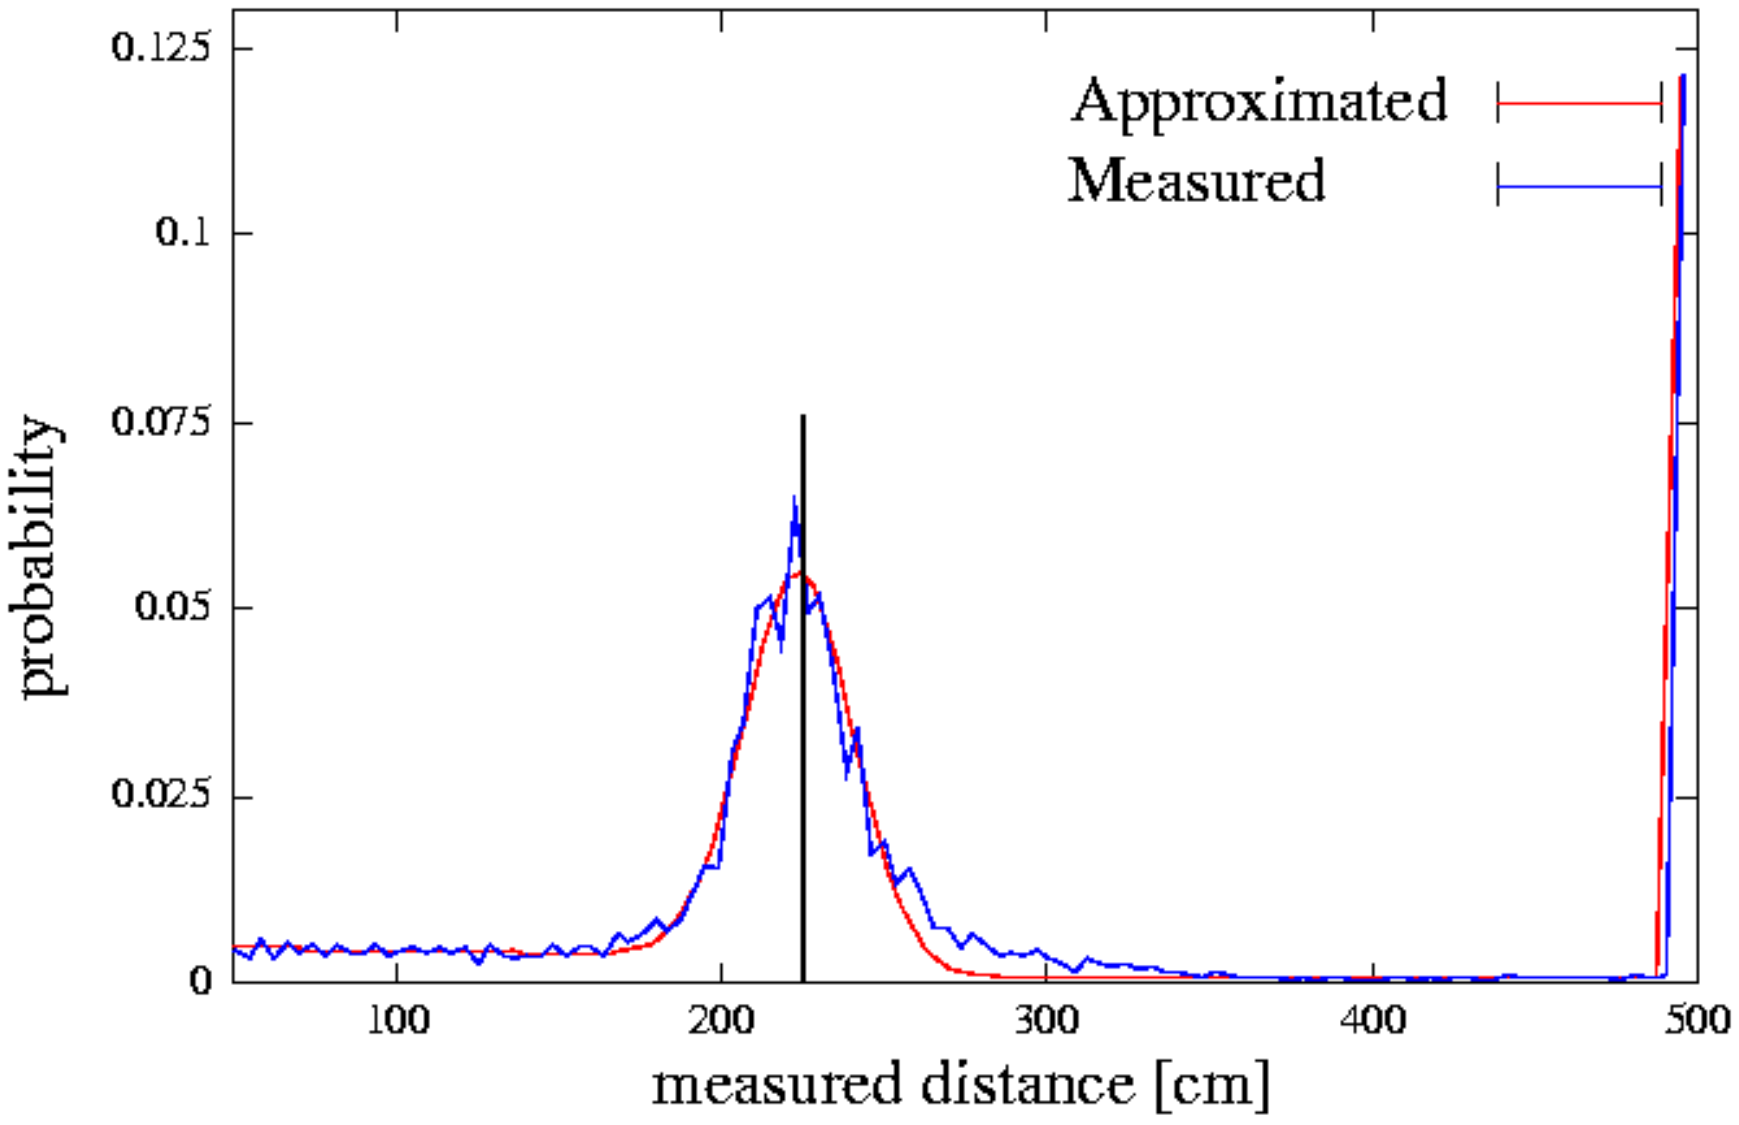

Laser sensor

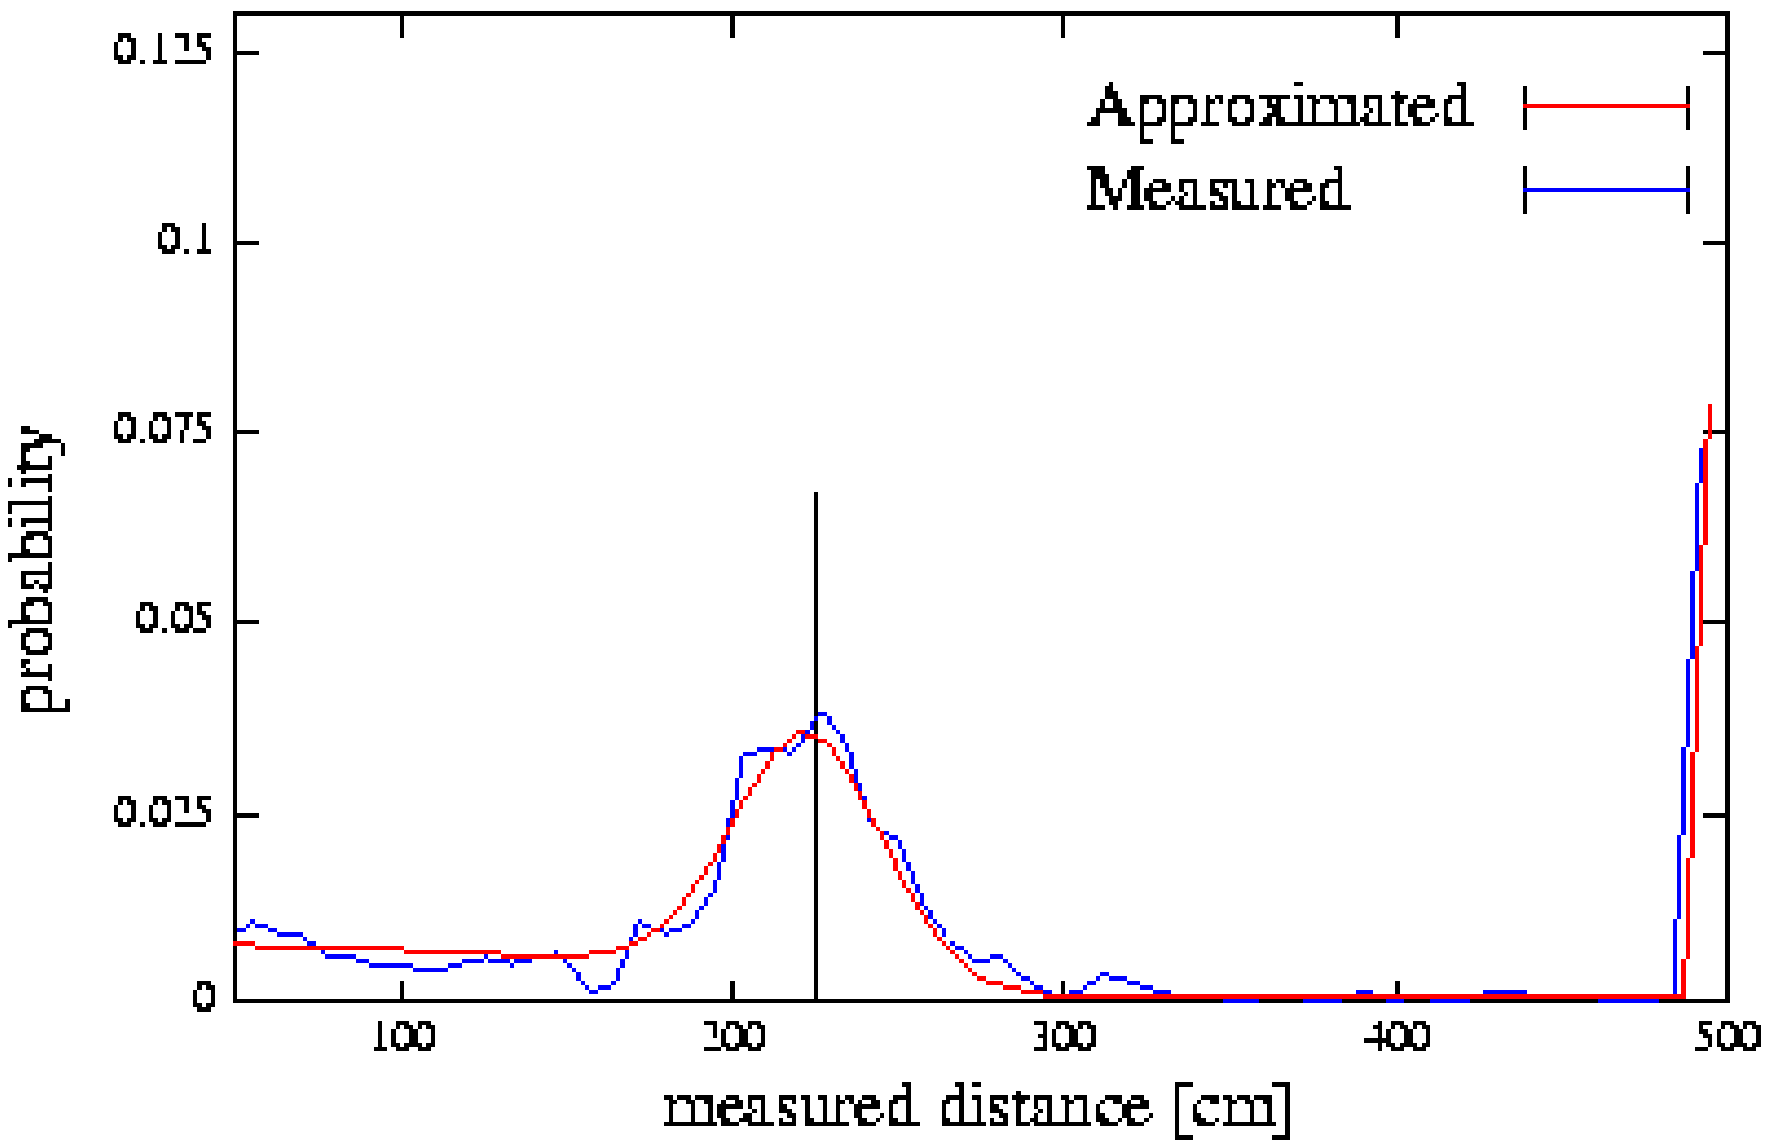

Sonar sensor

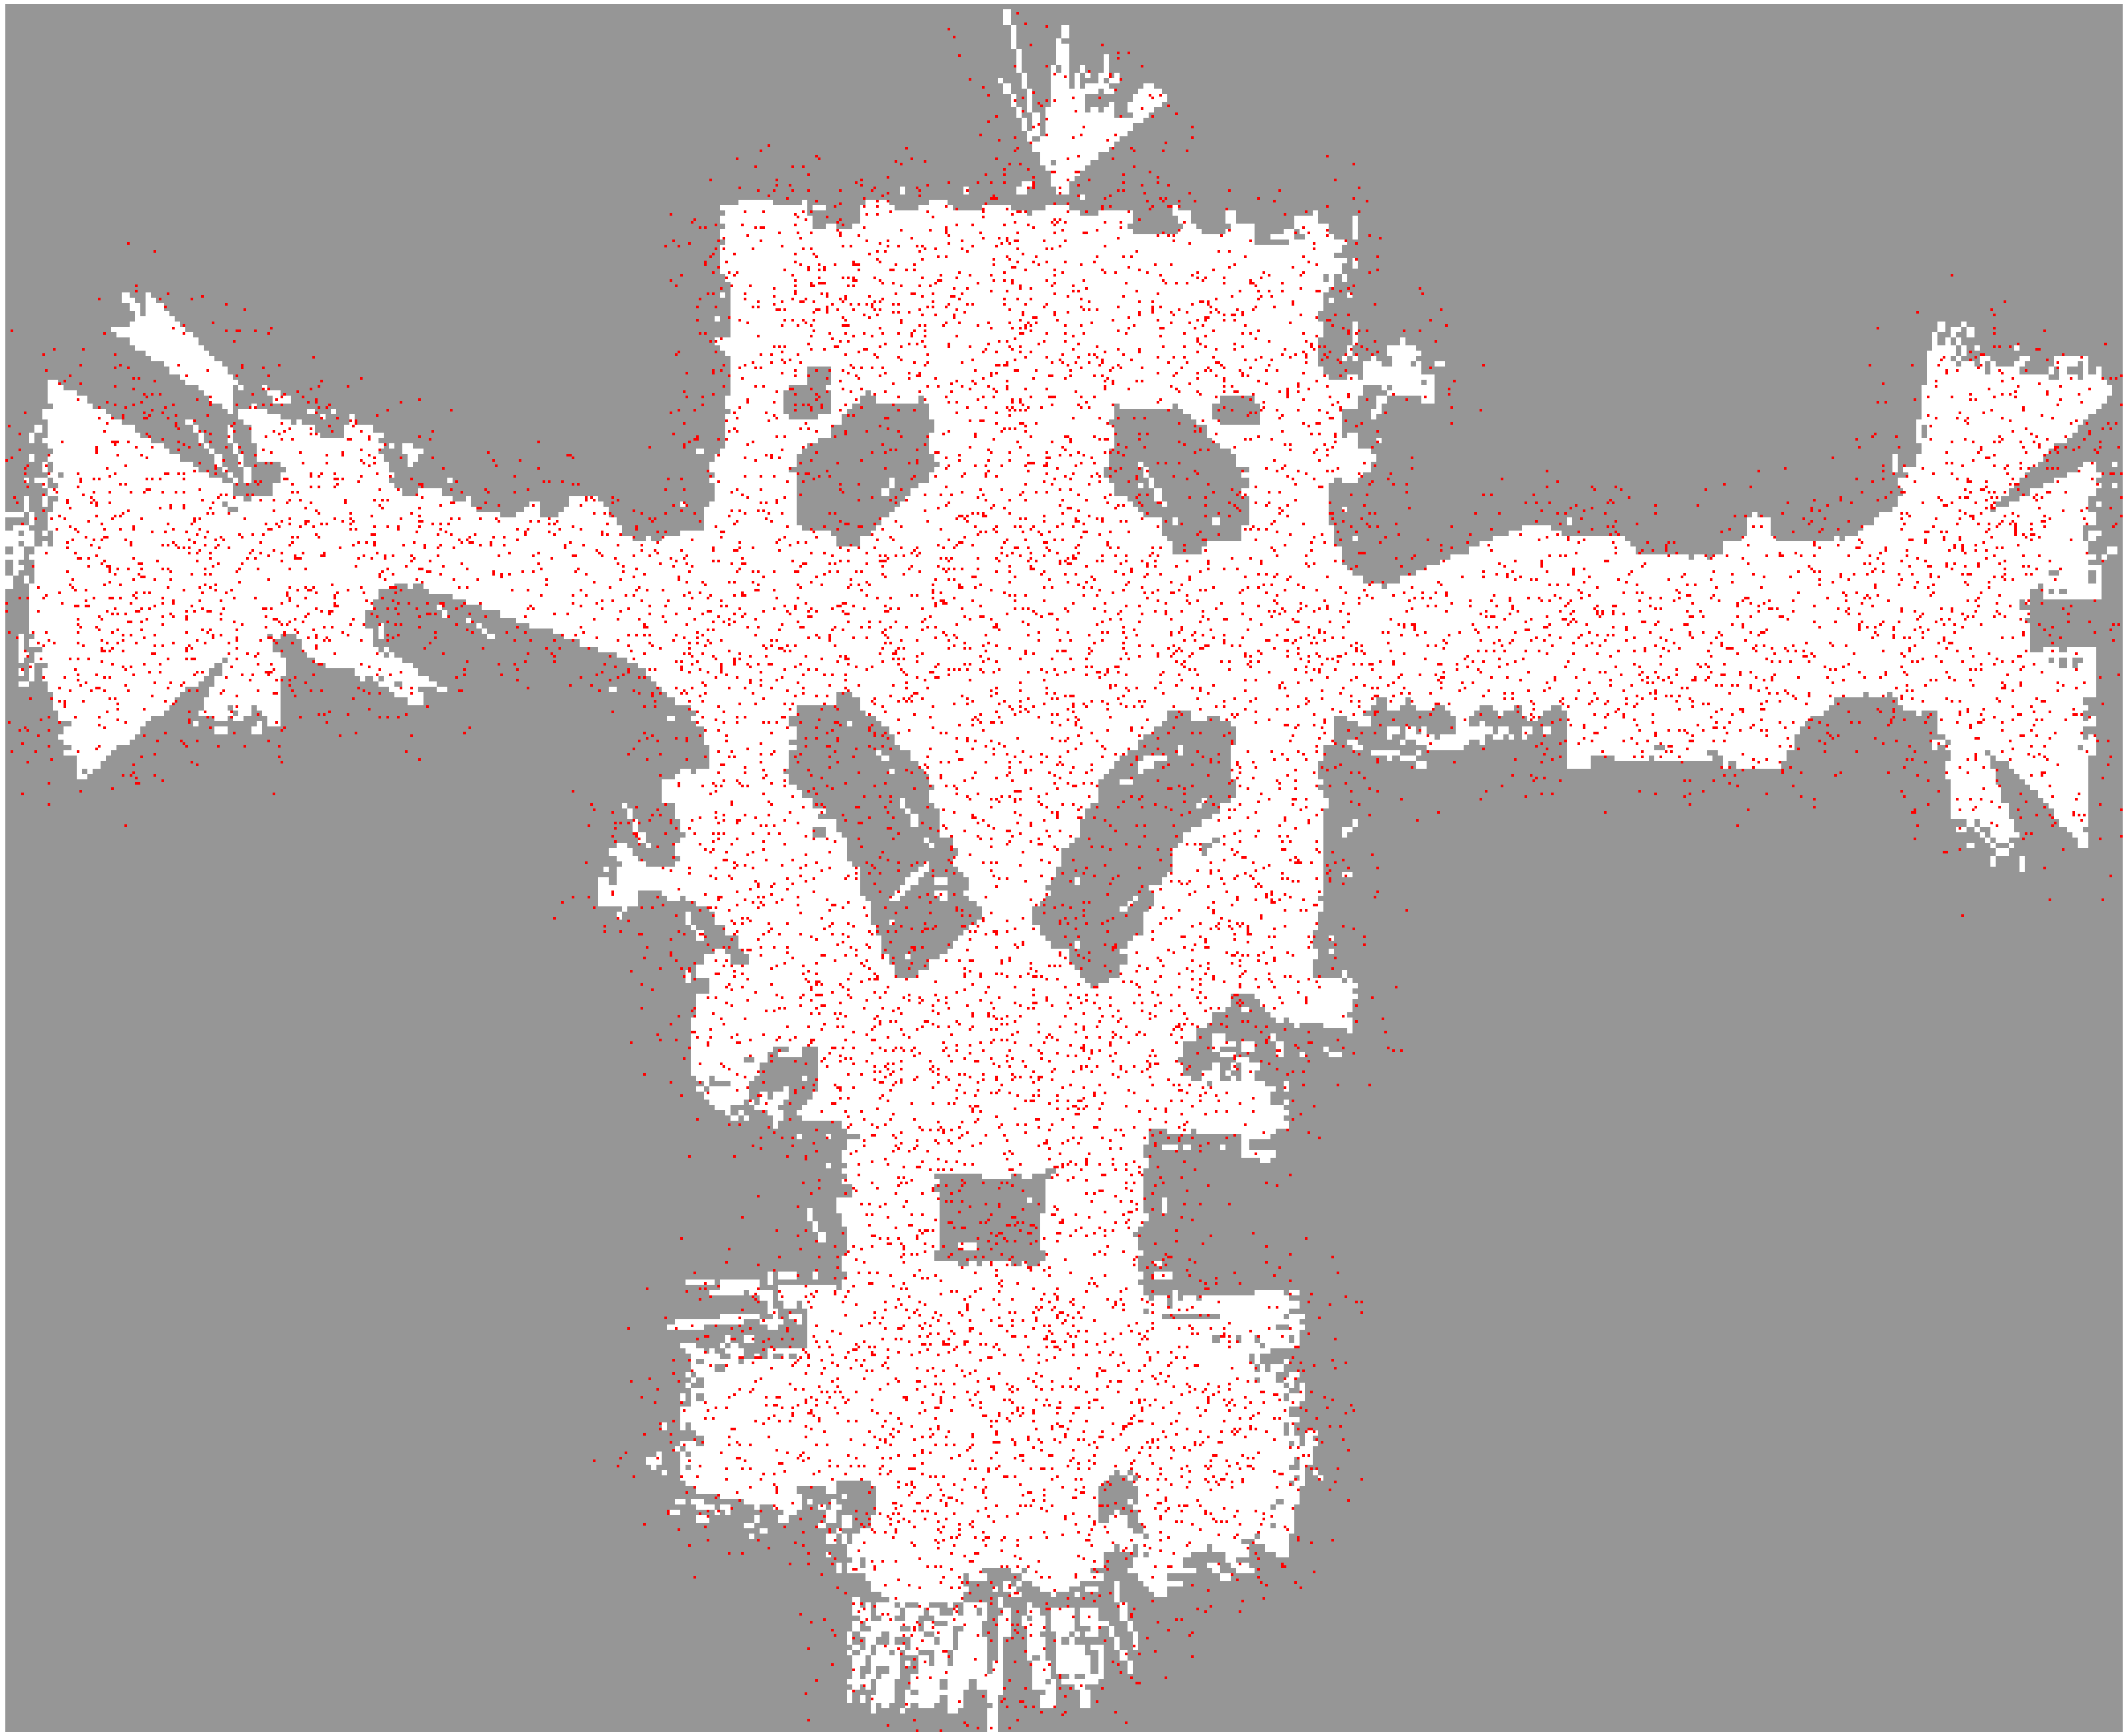

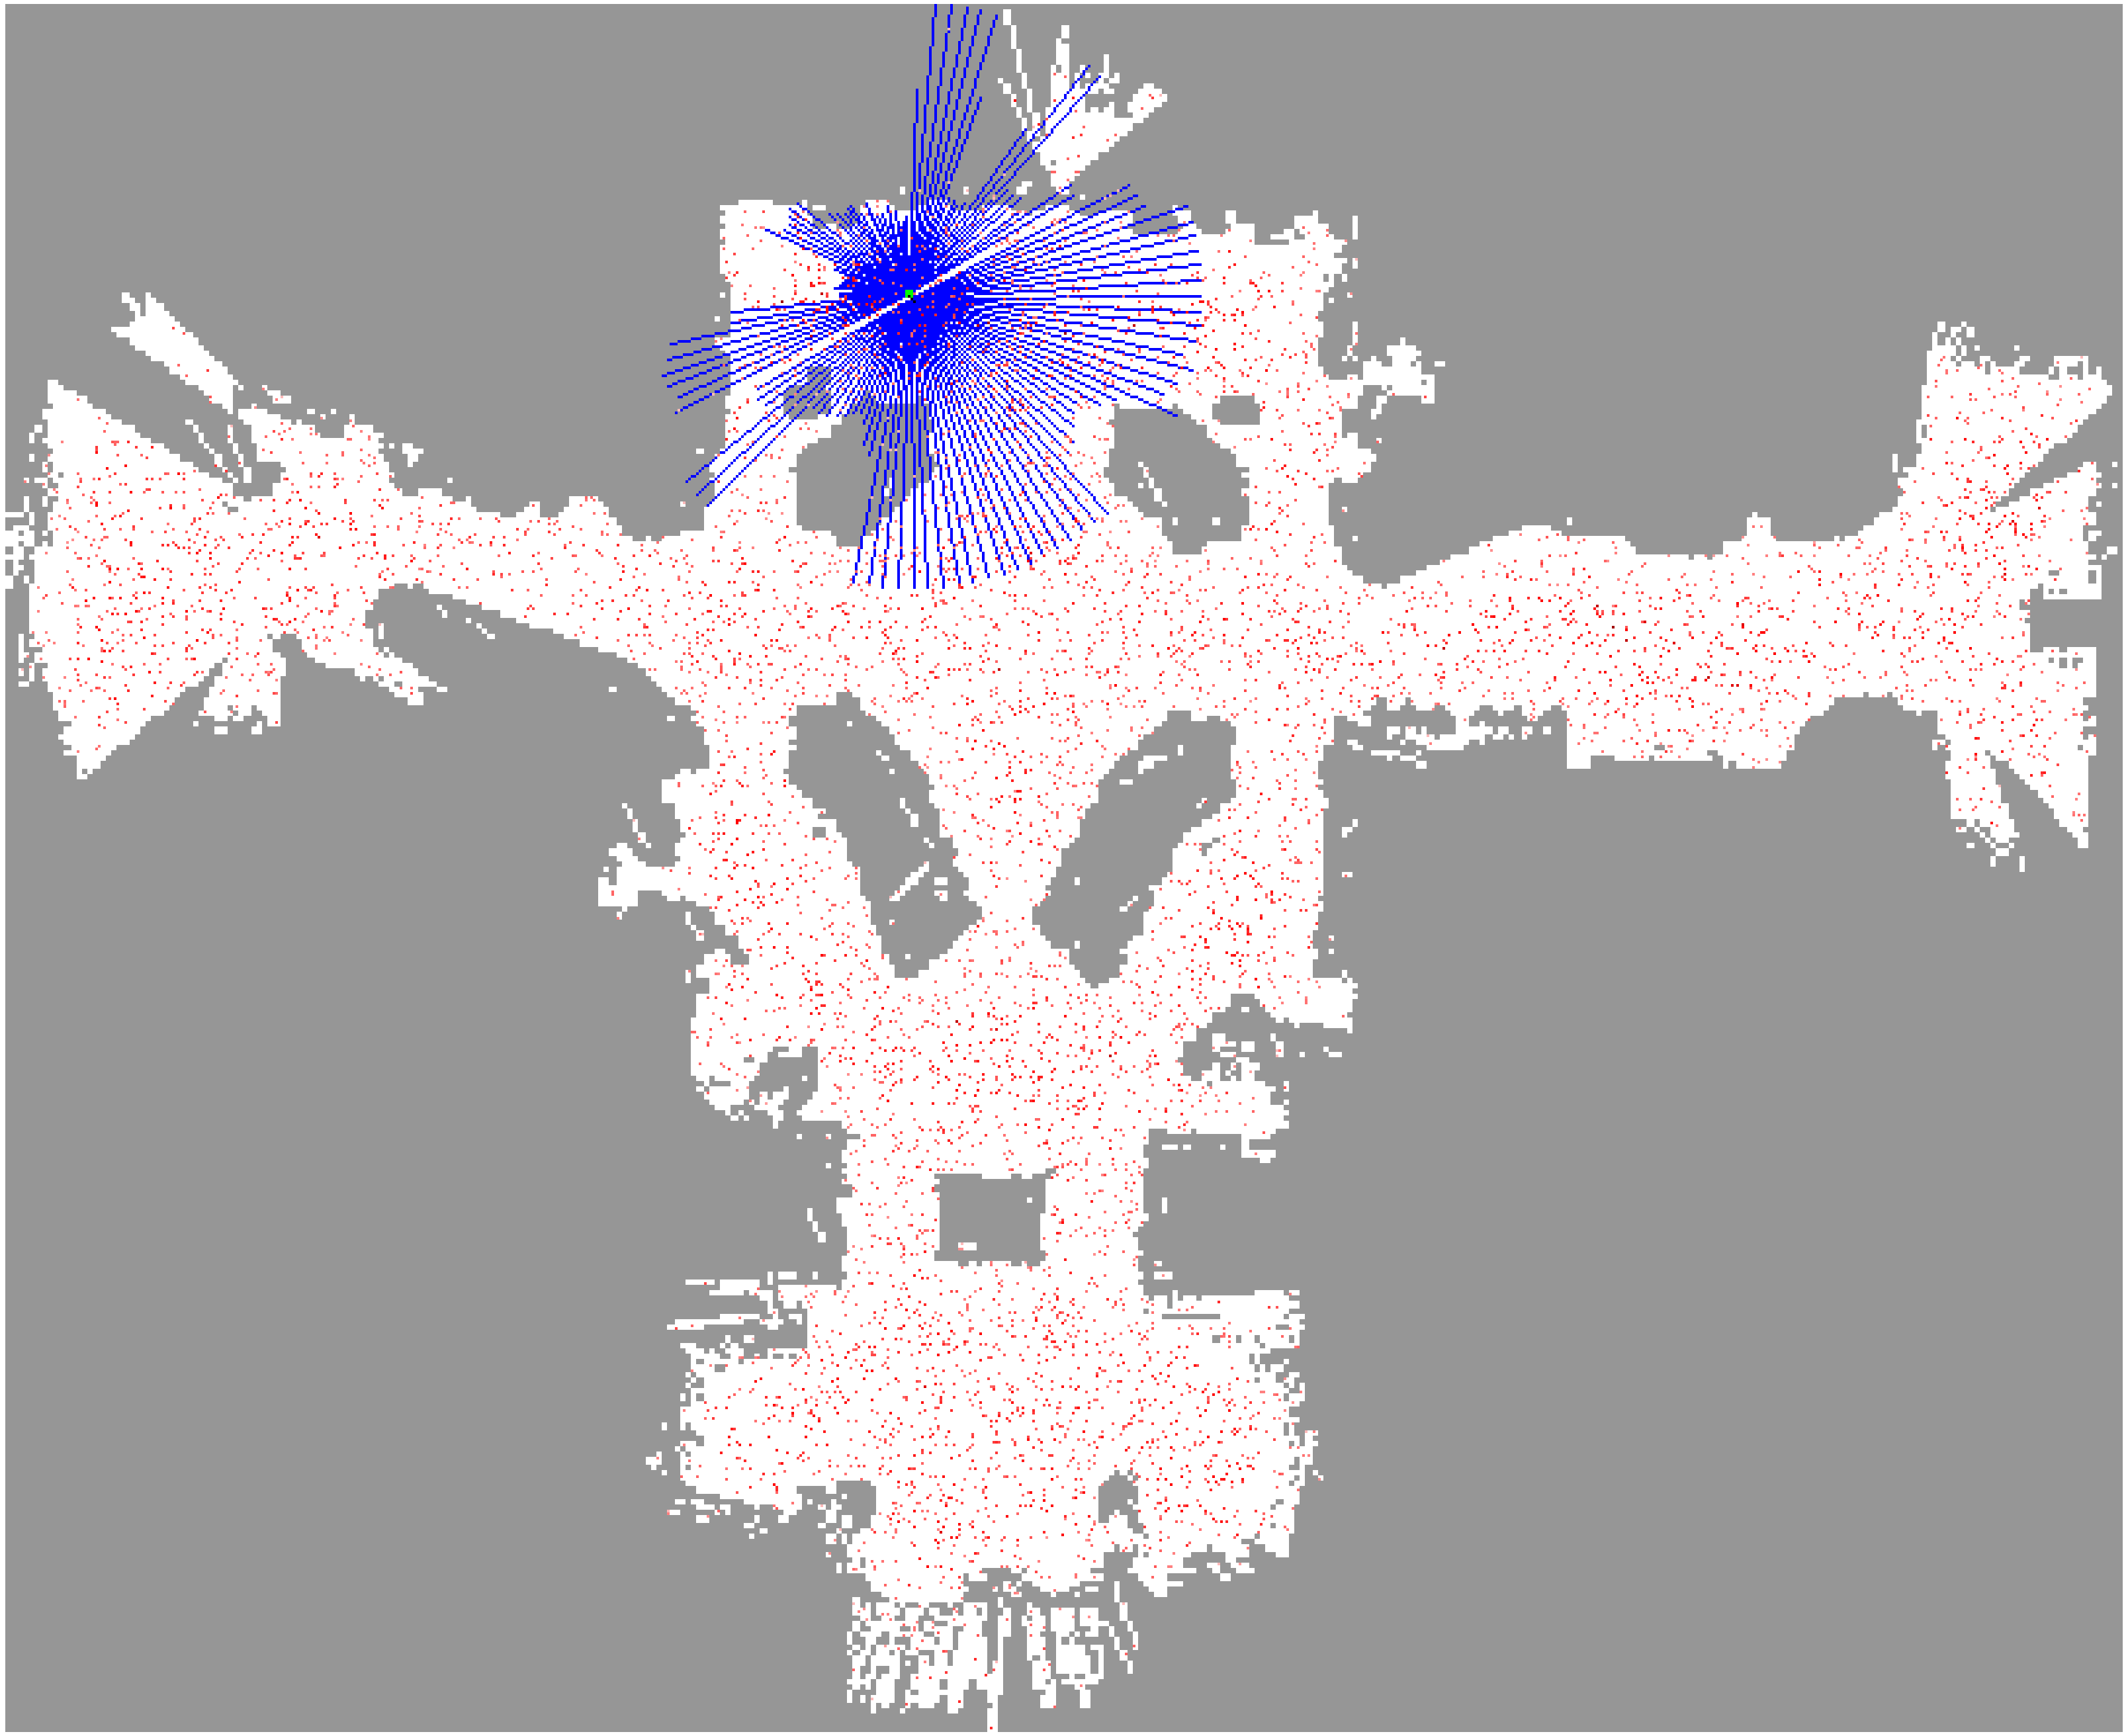

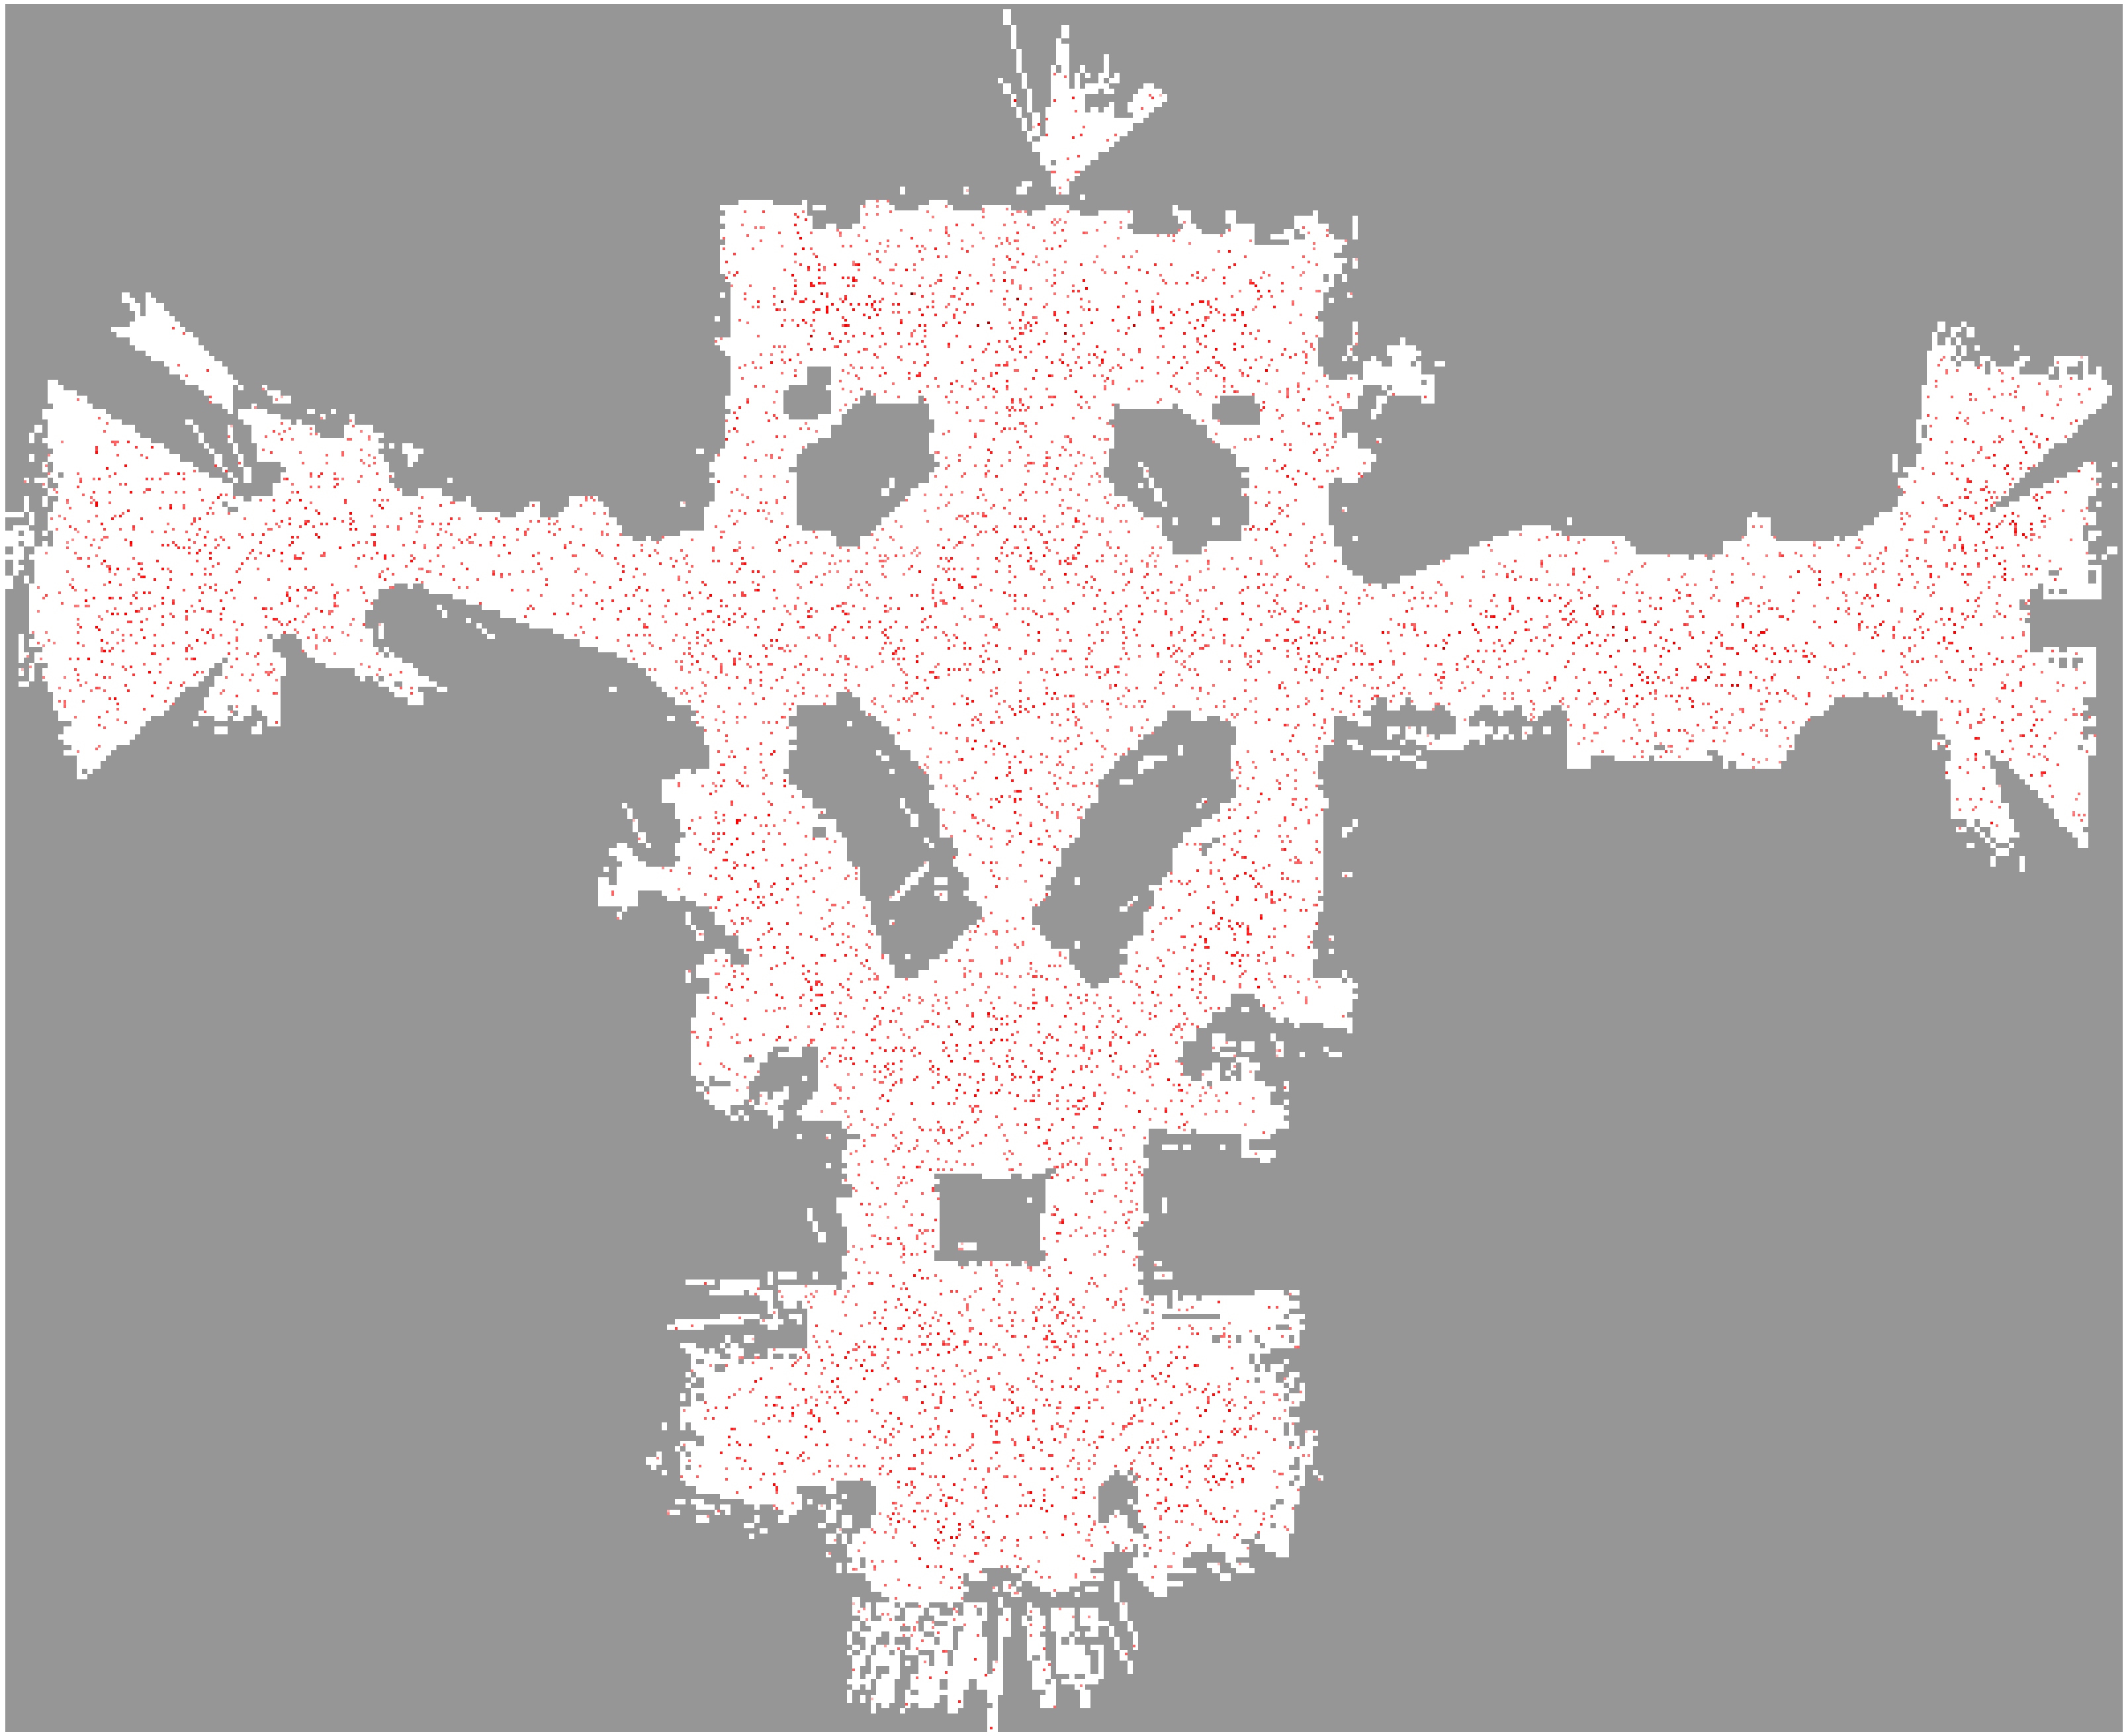

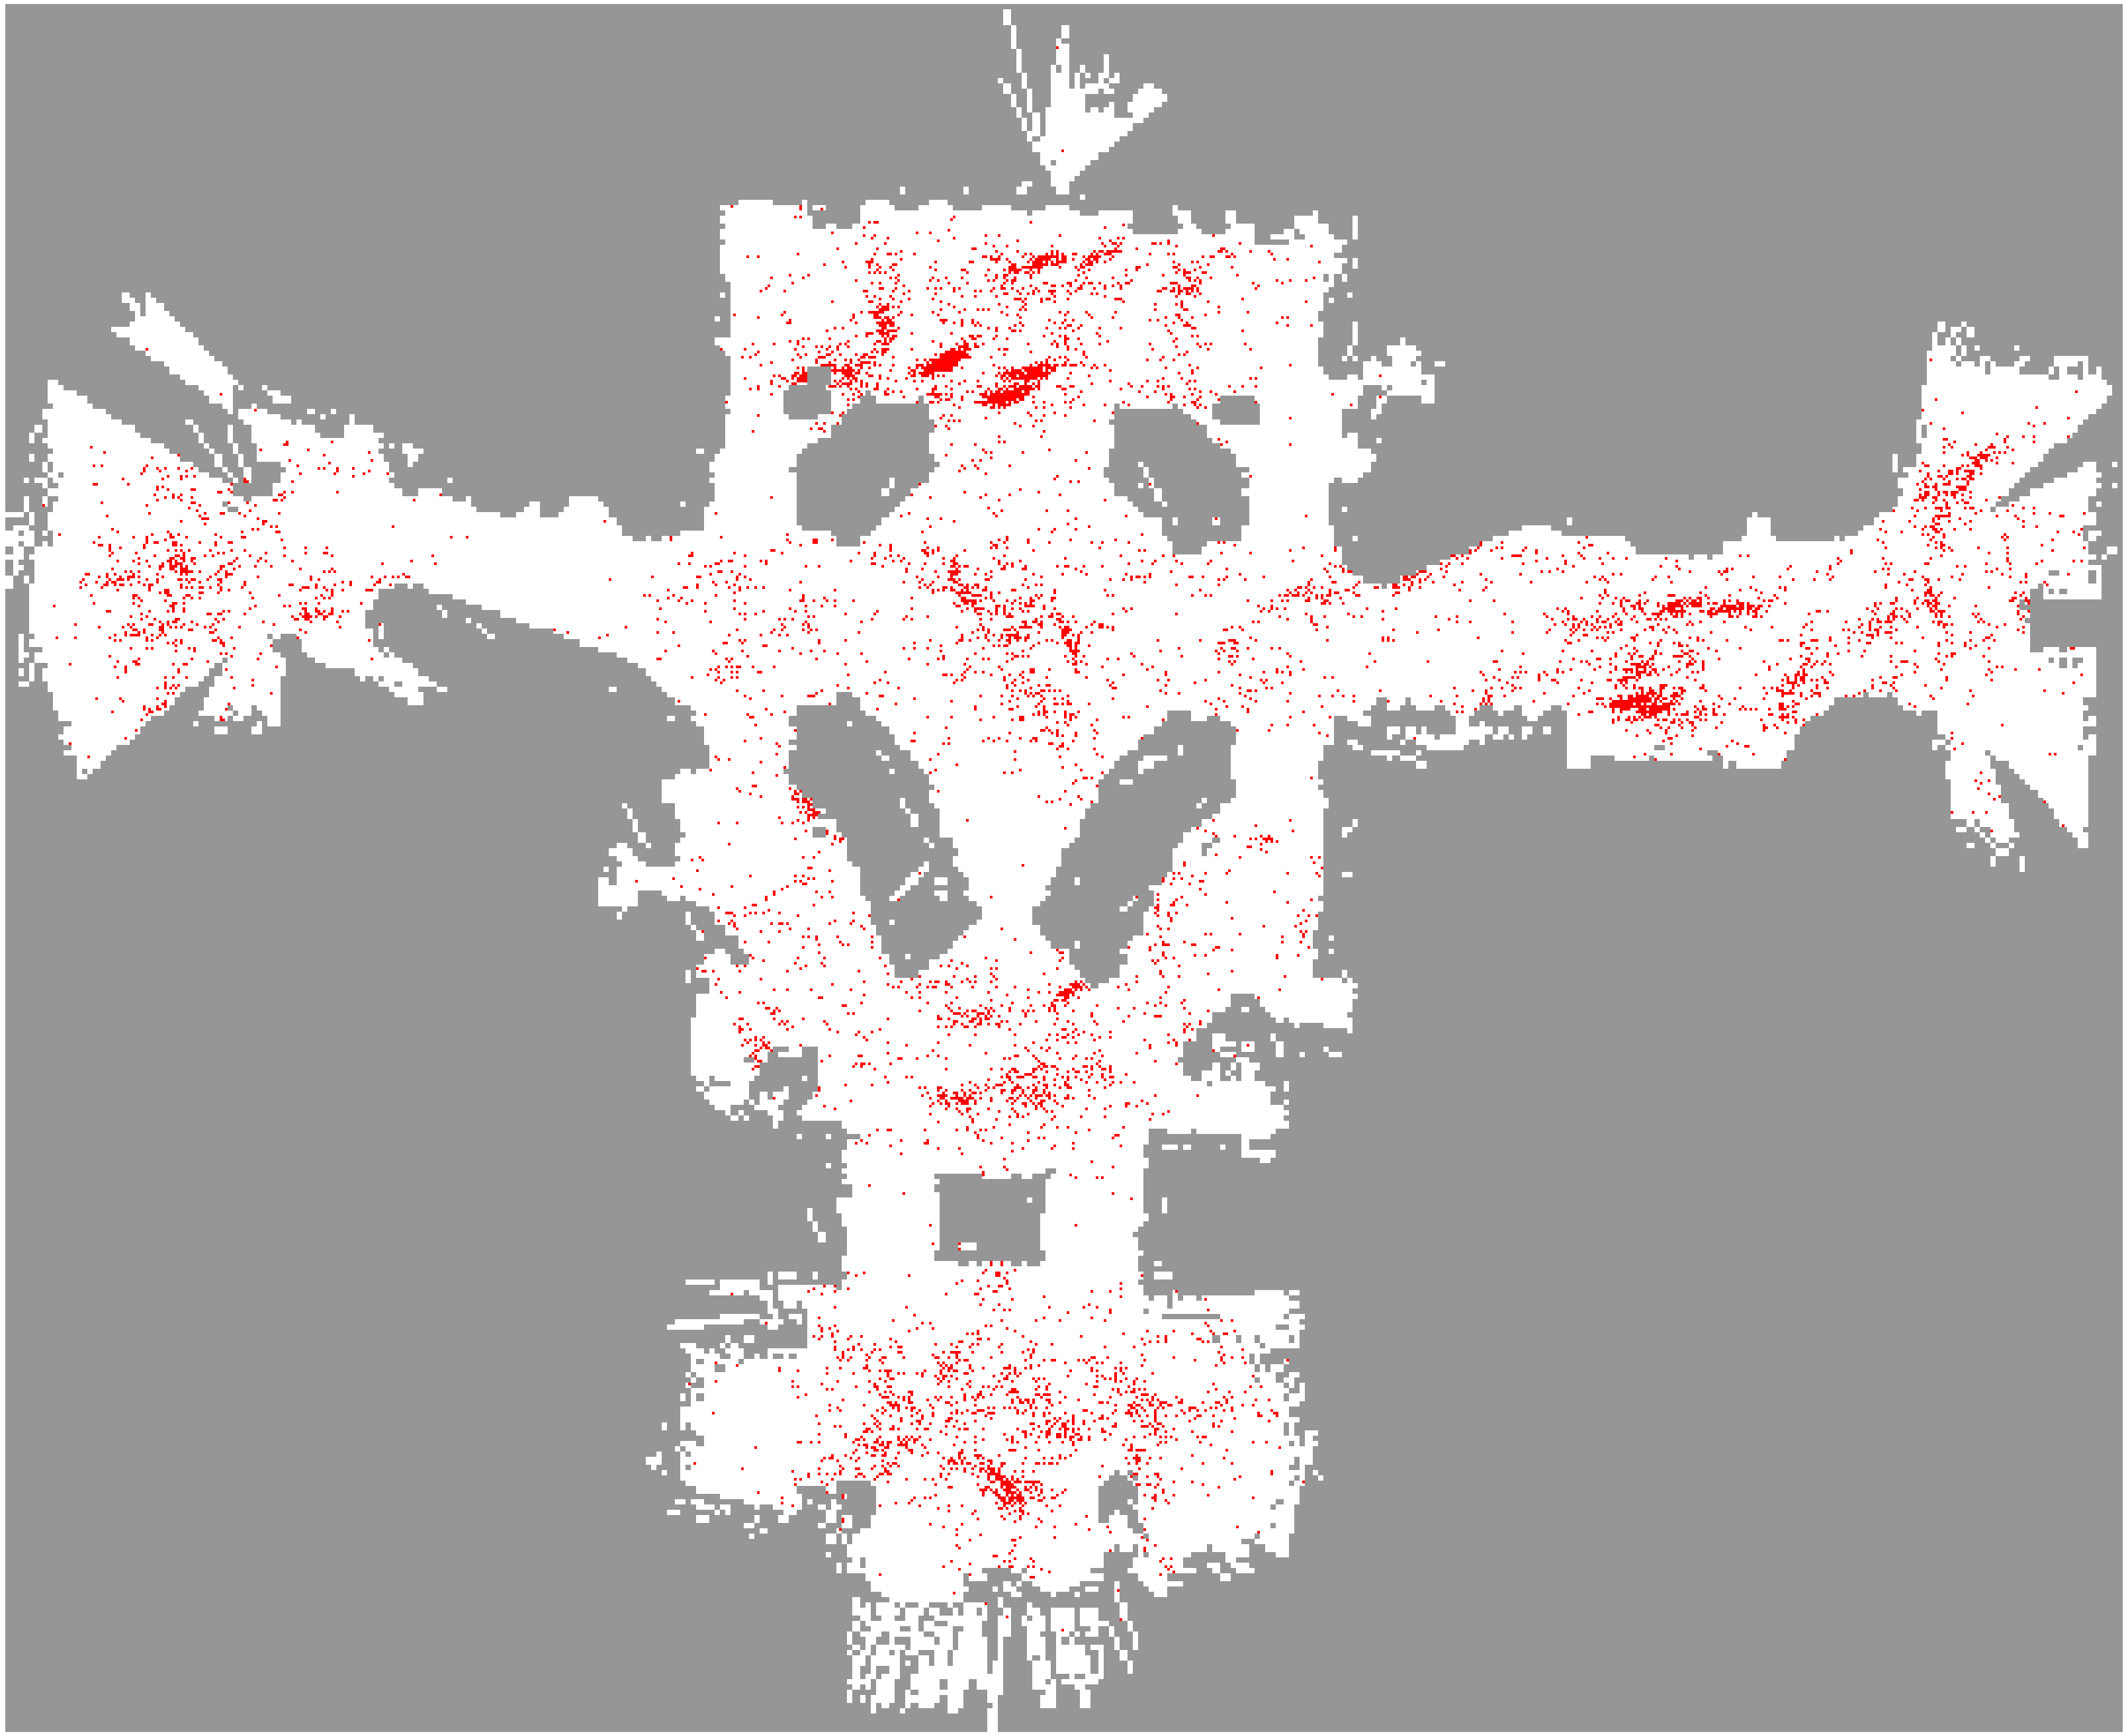

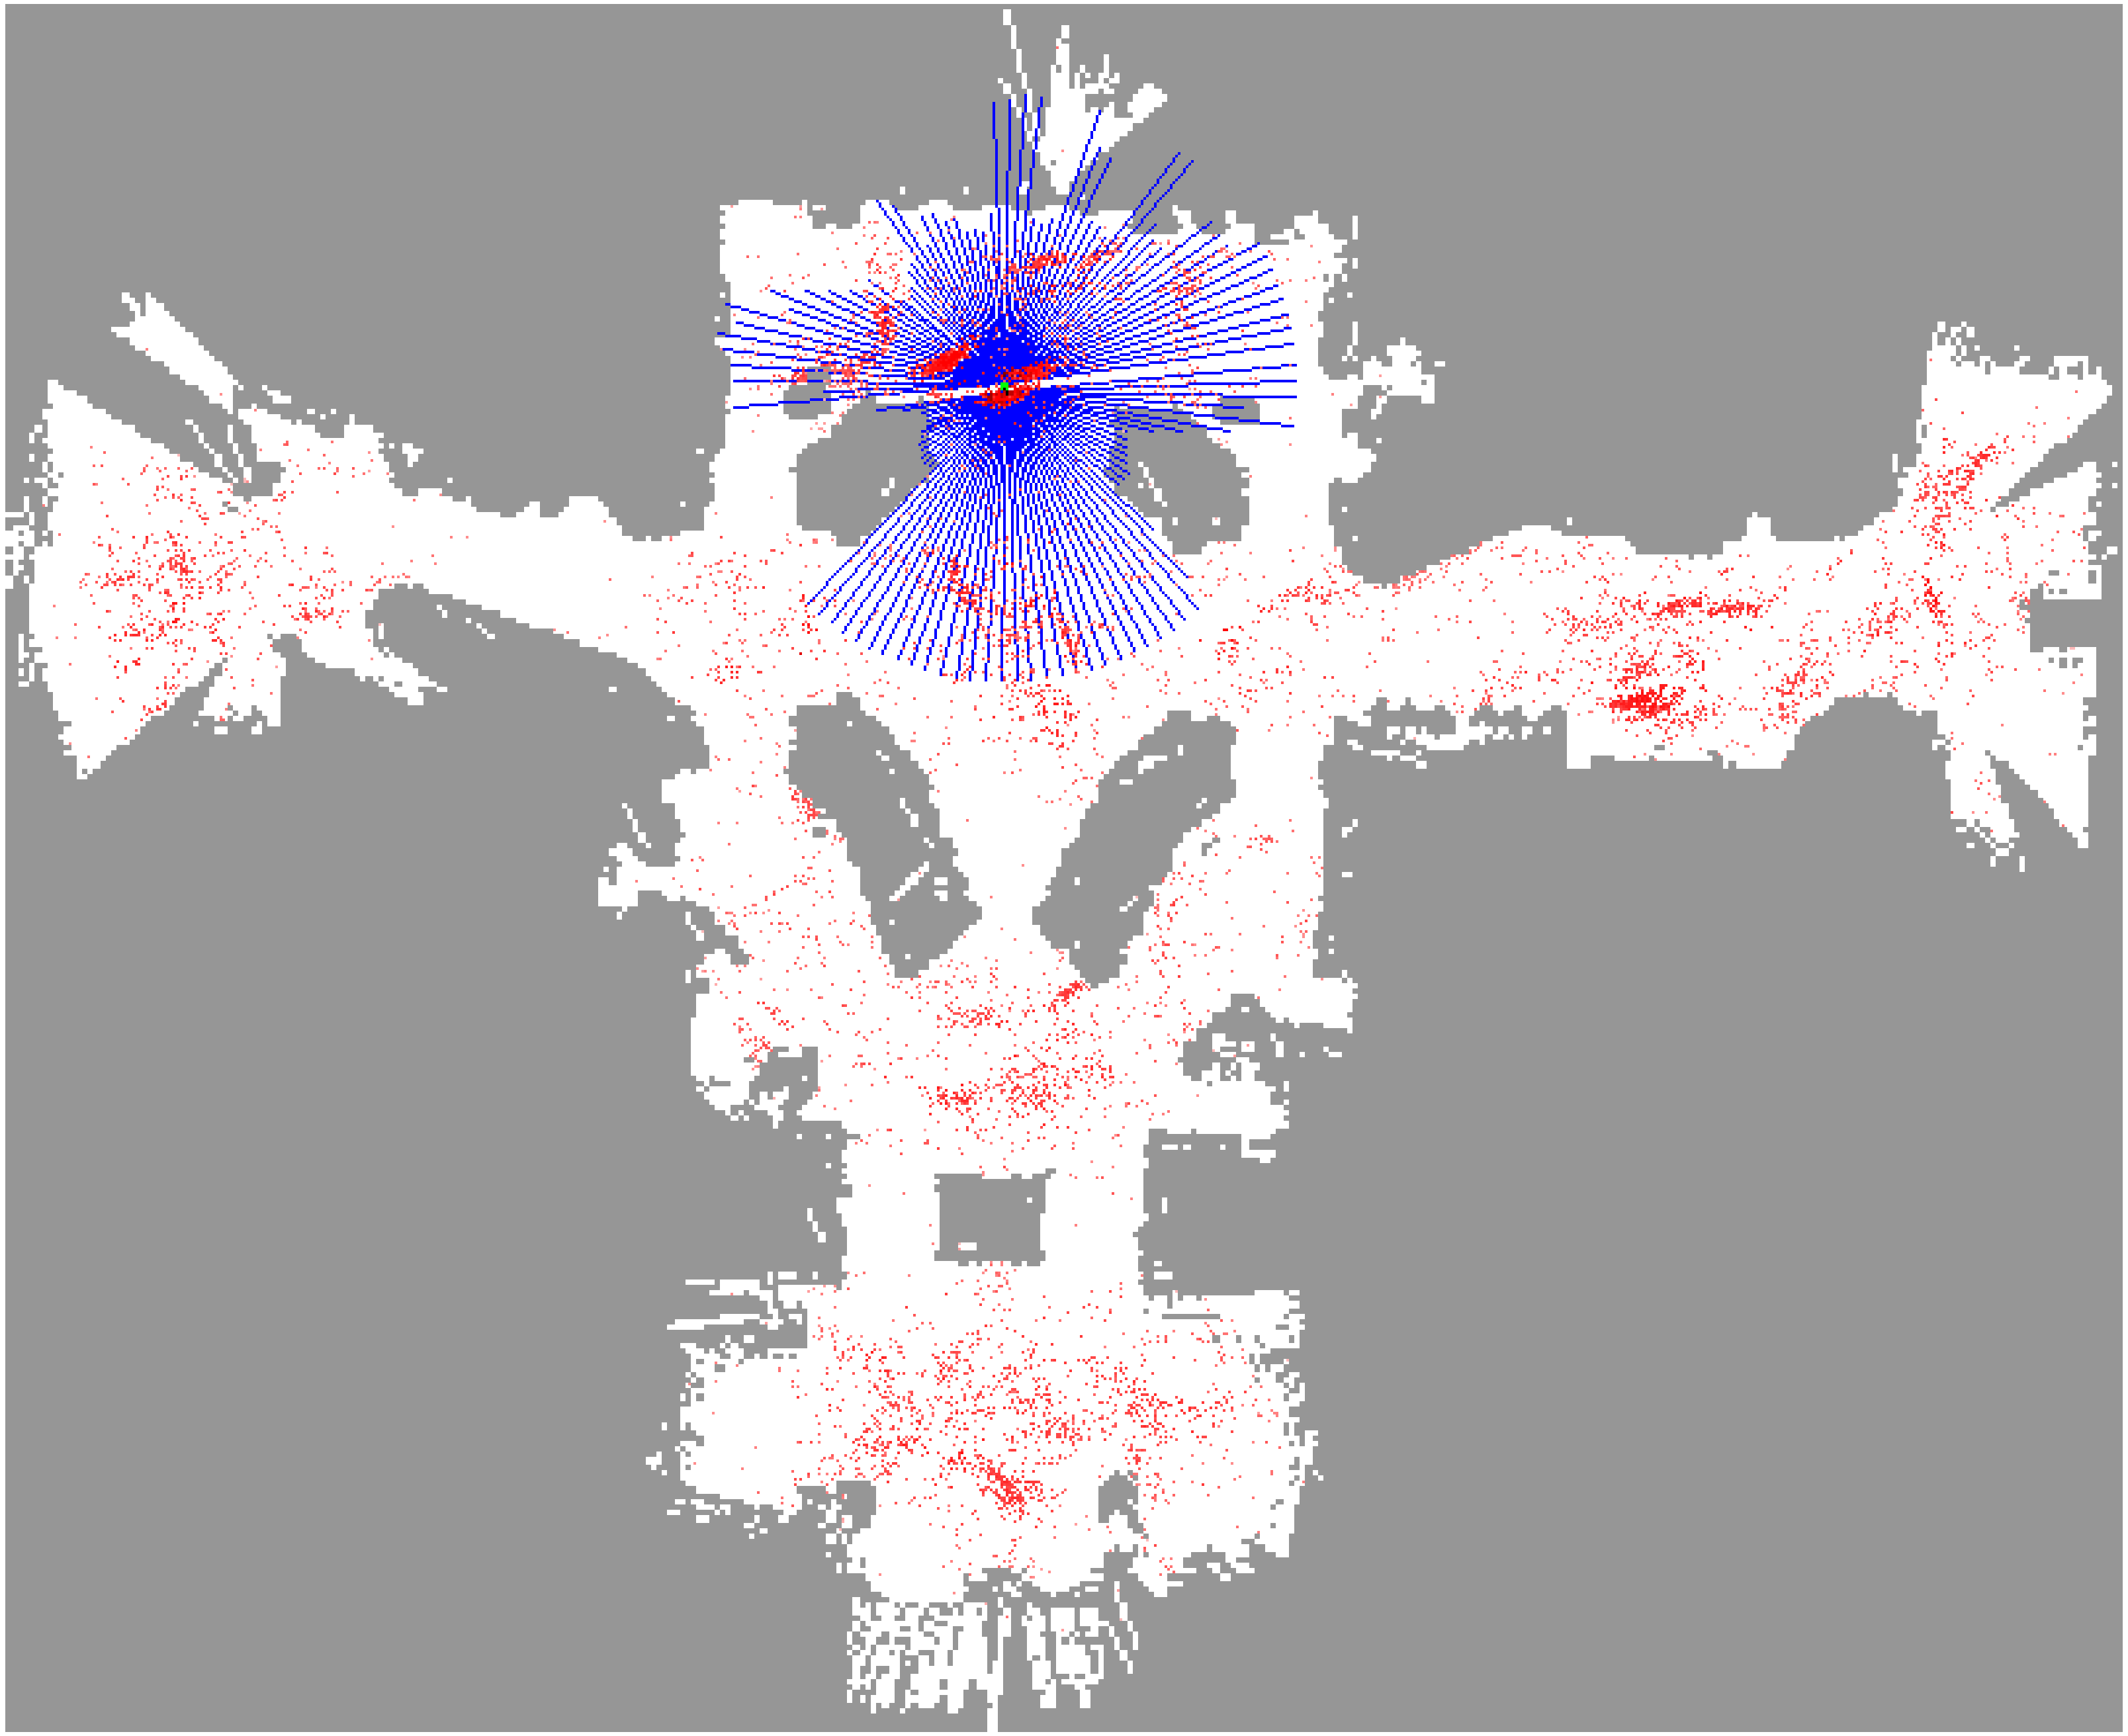

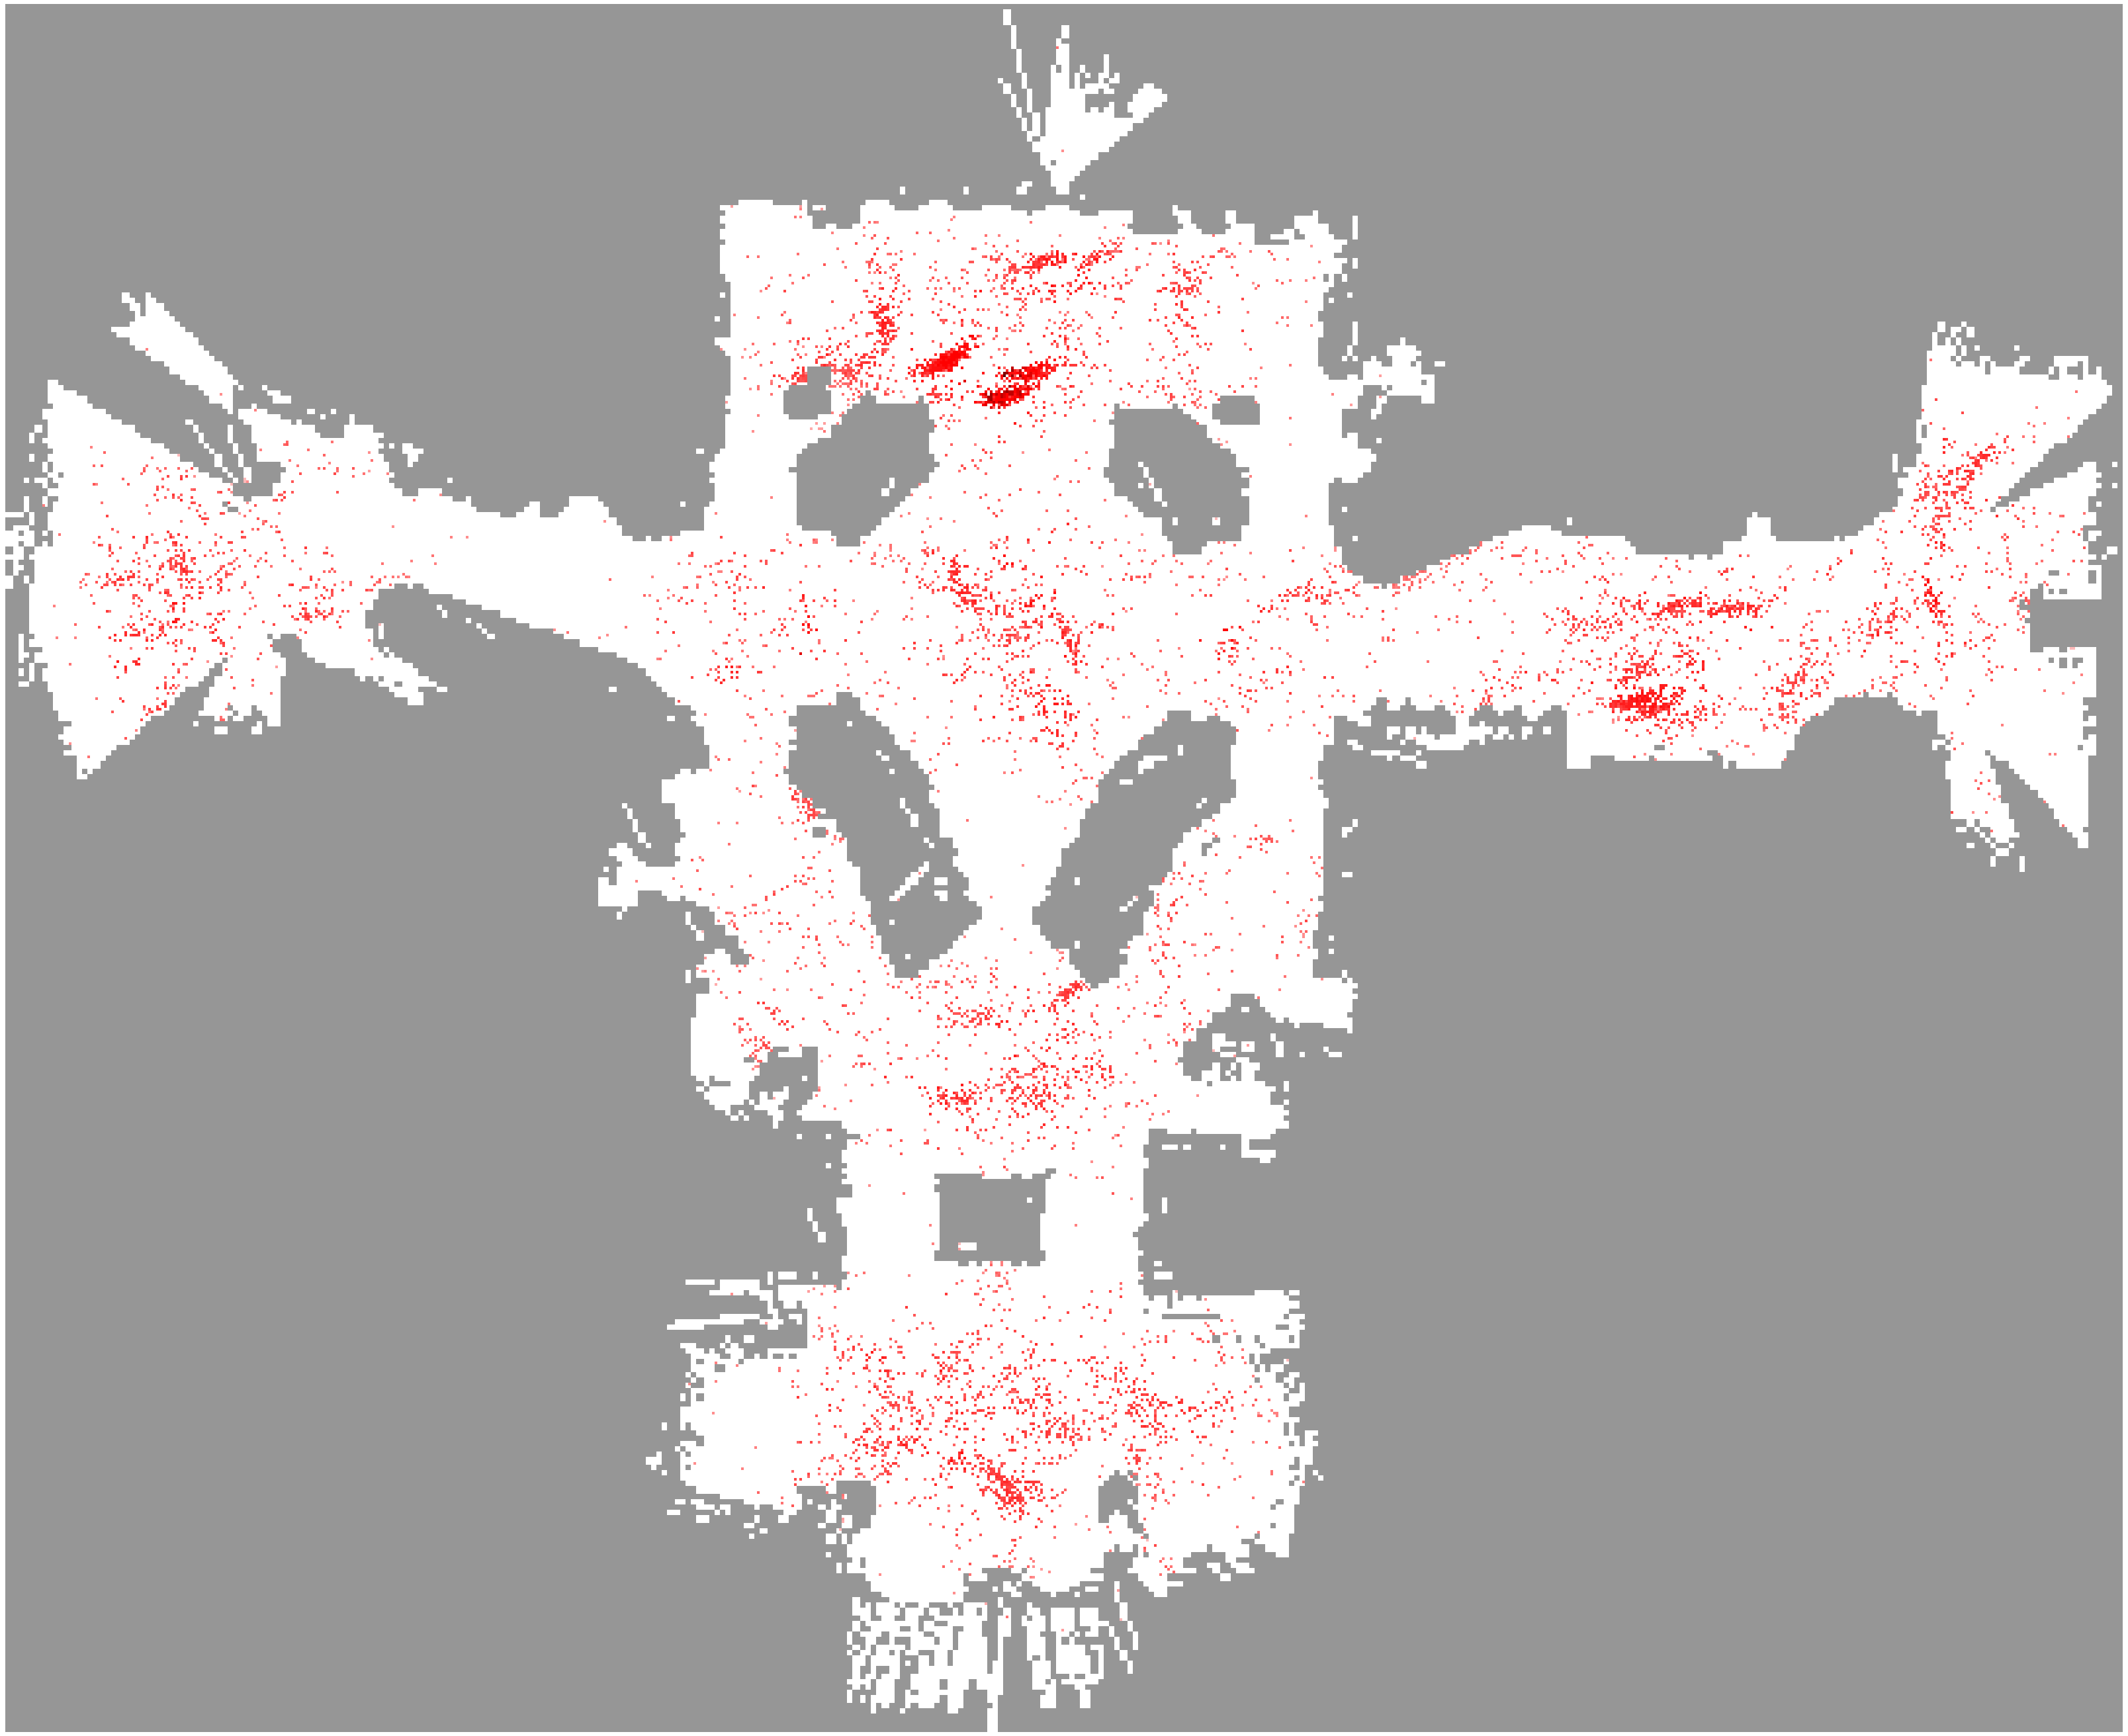

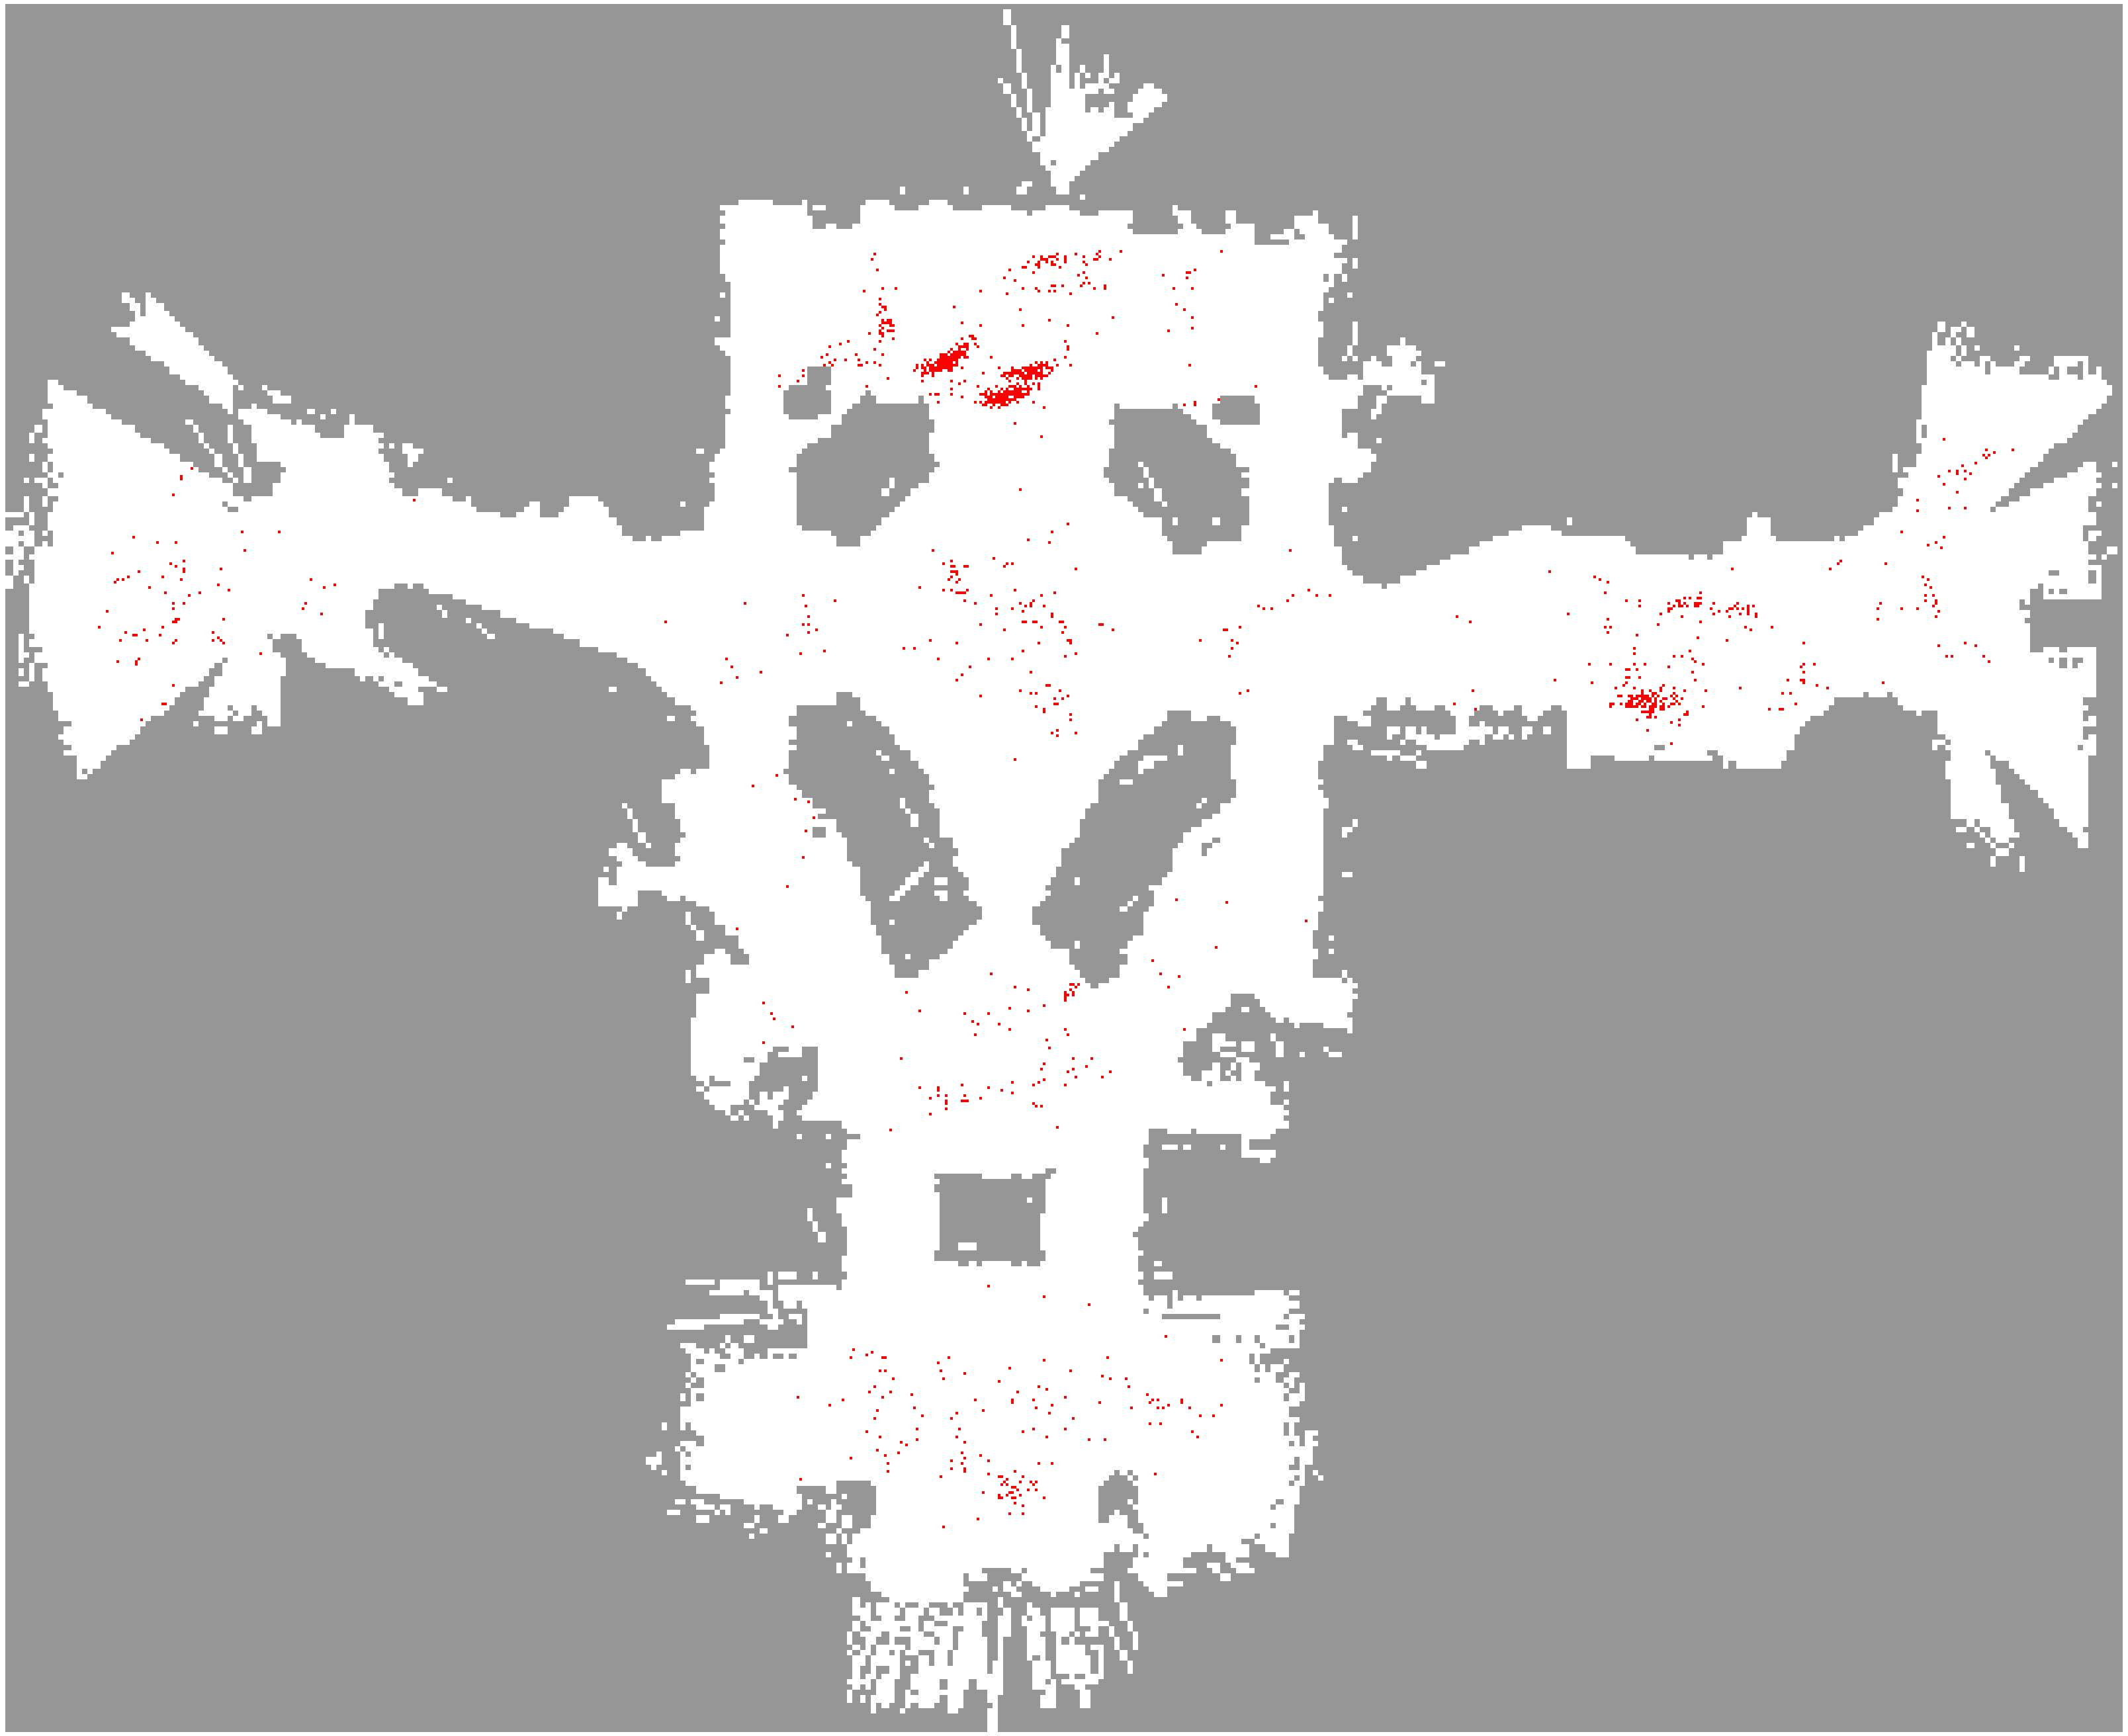

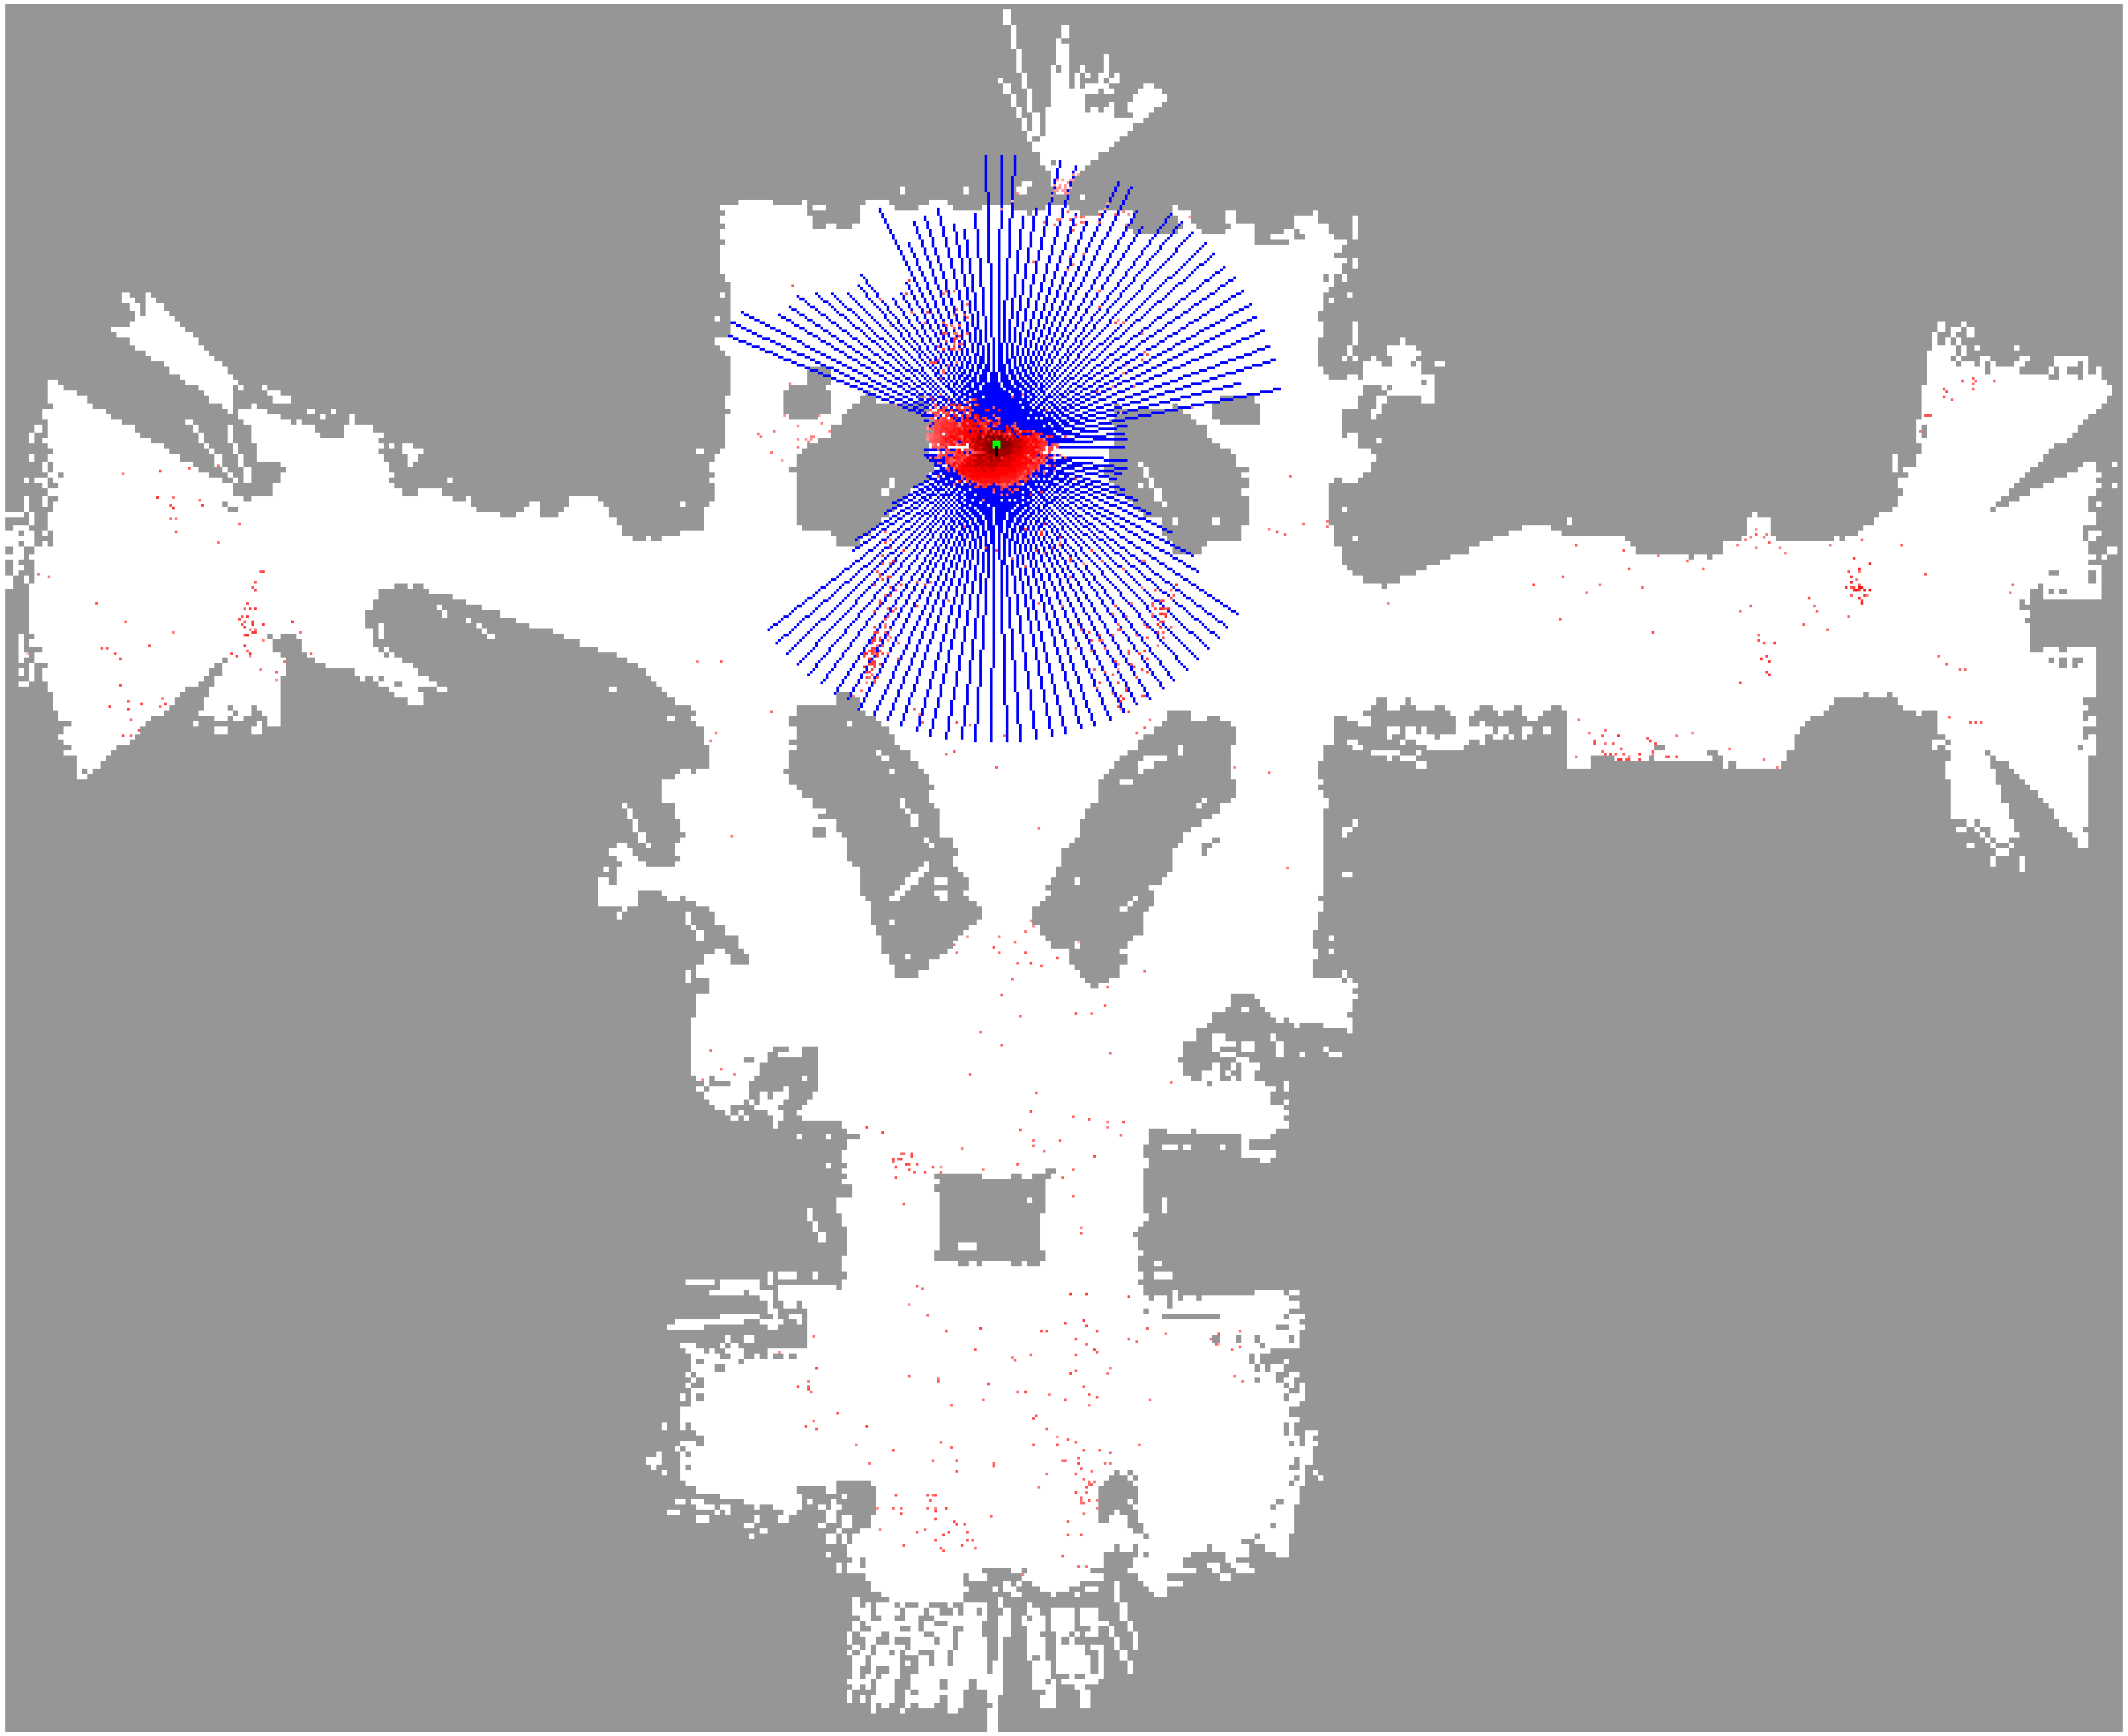

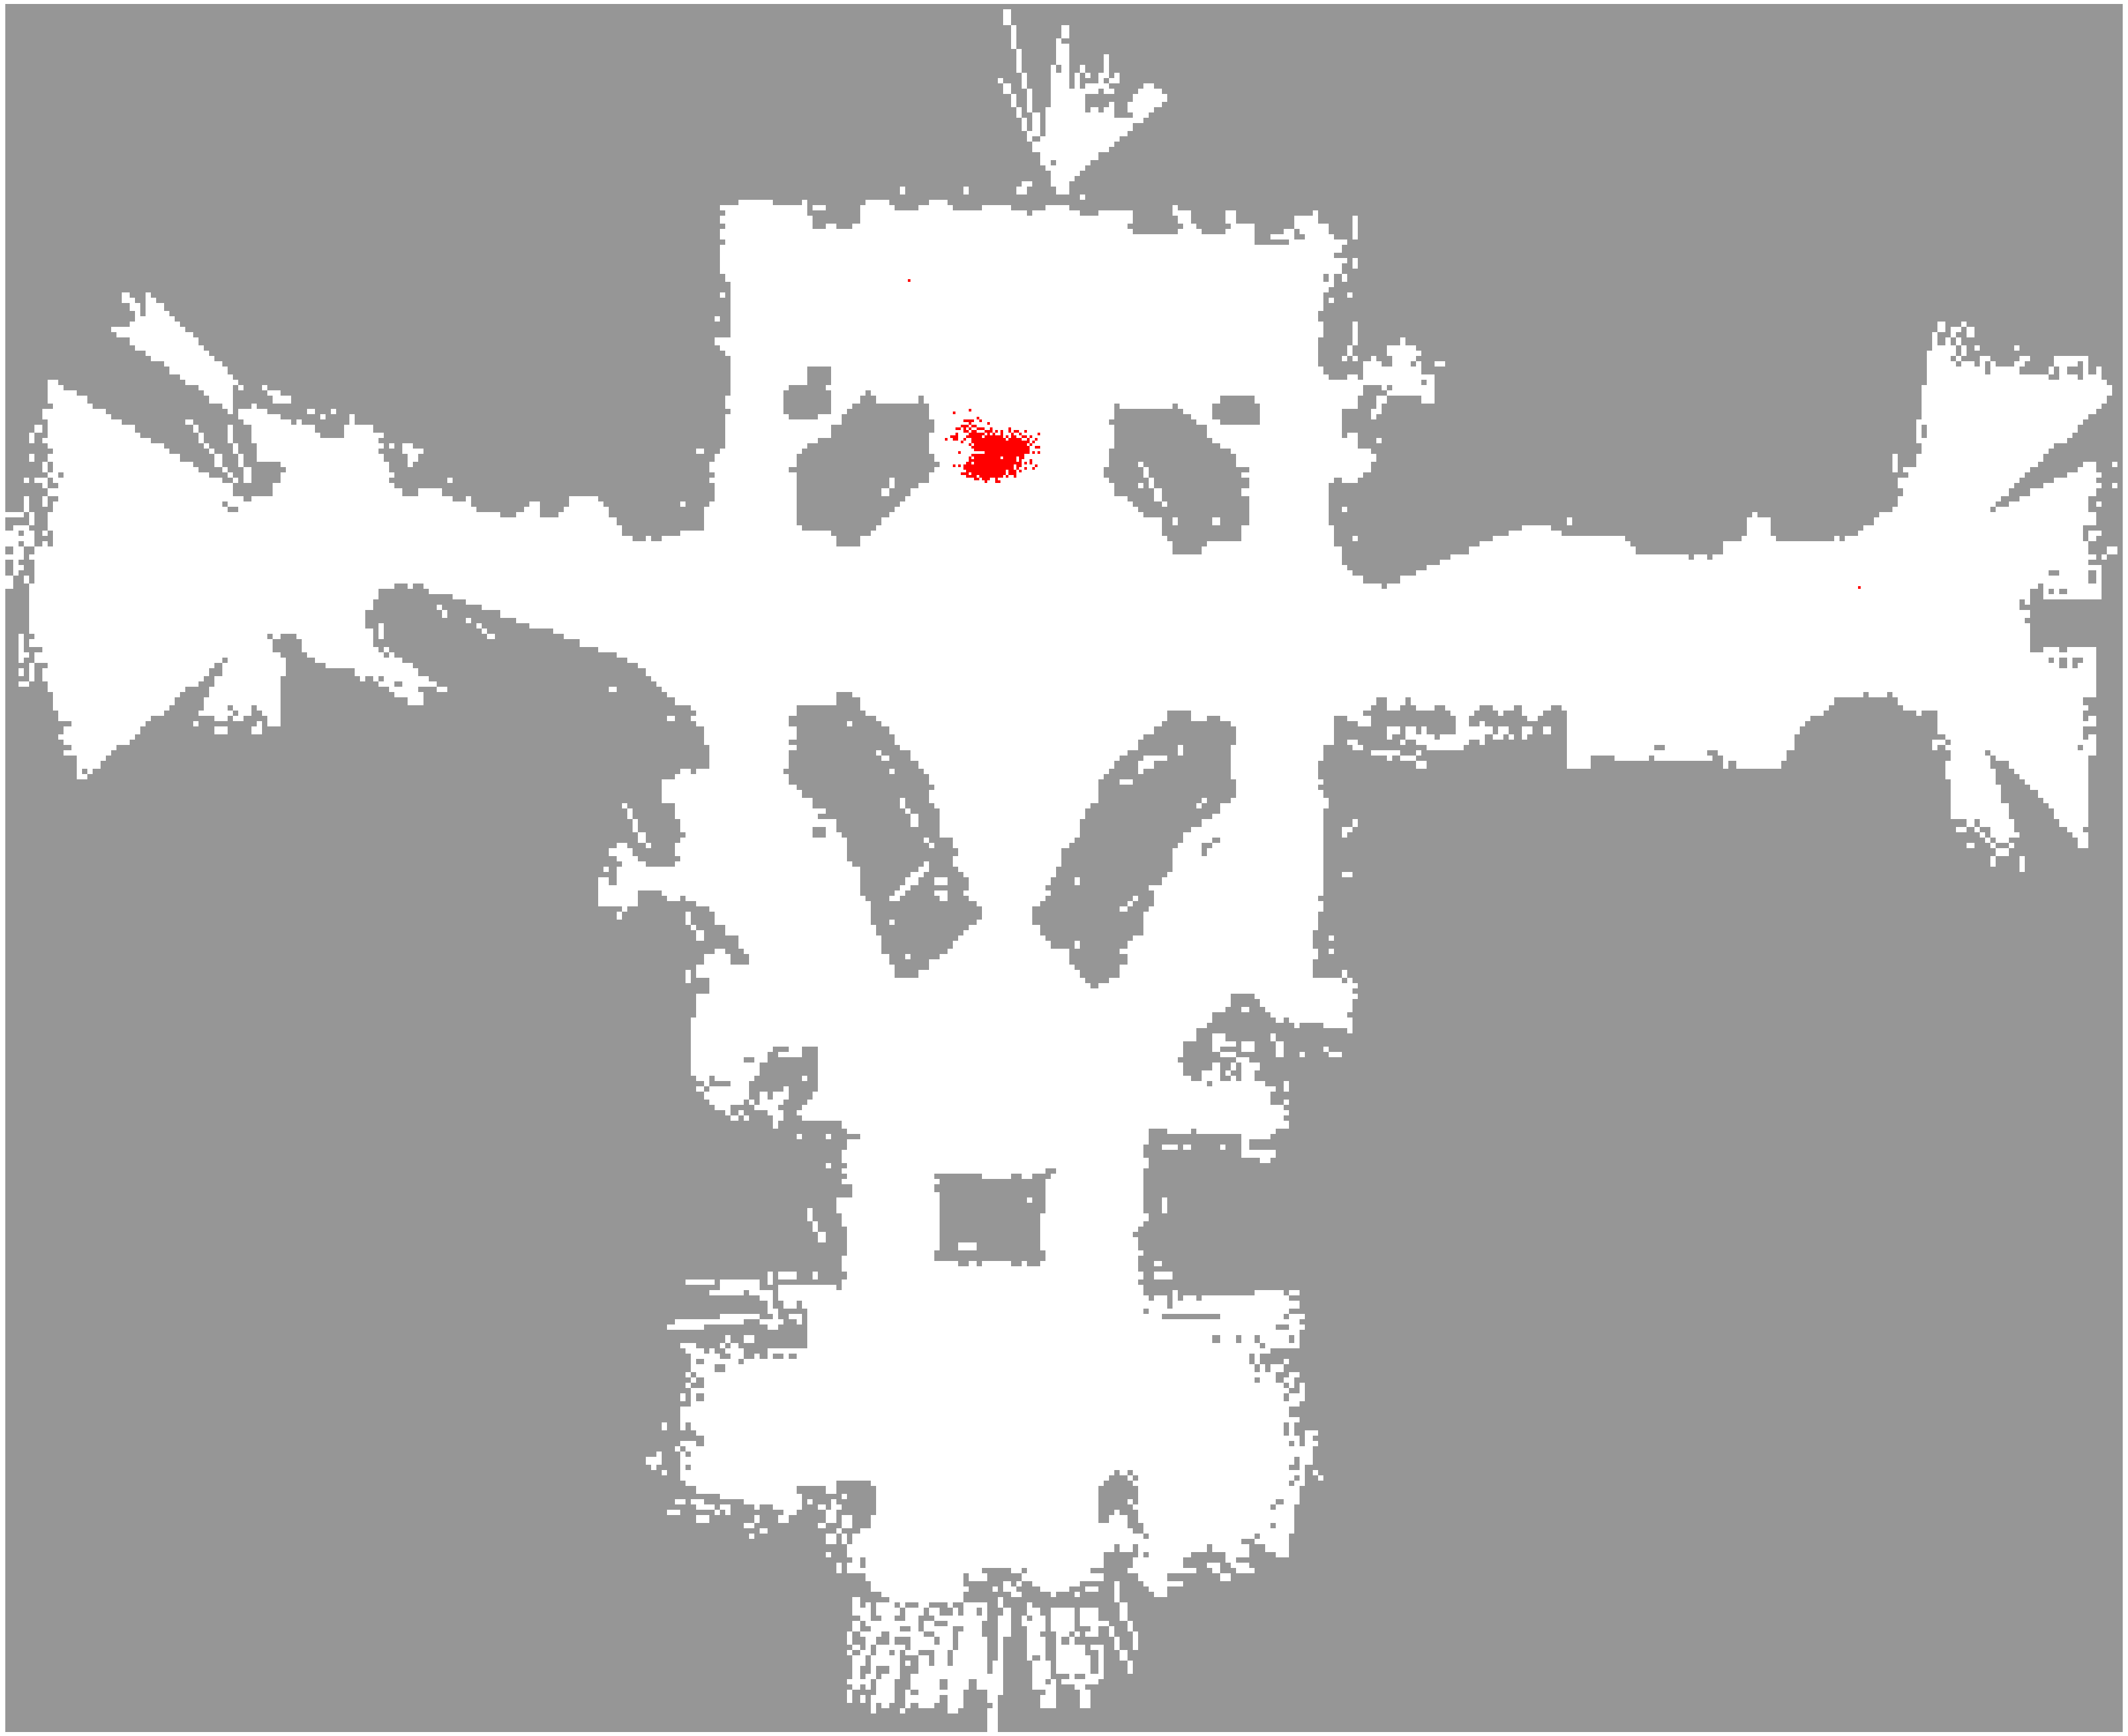

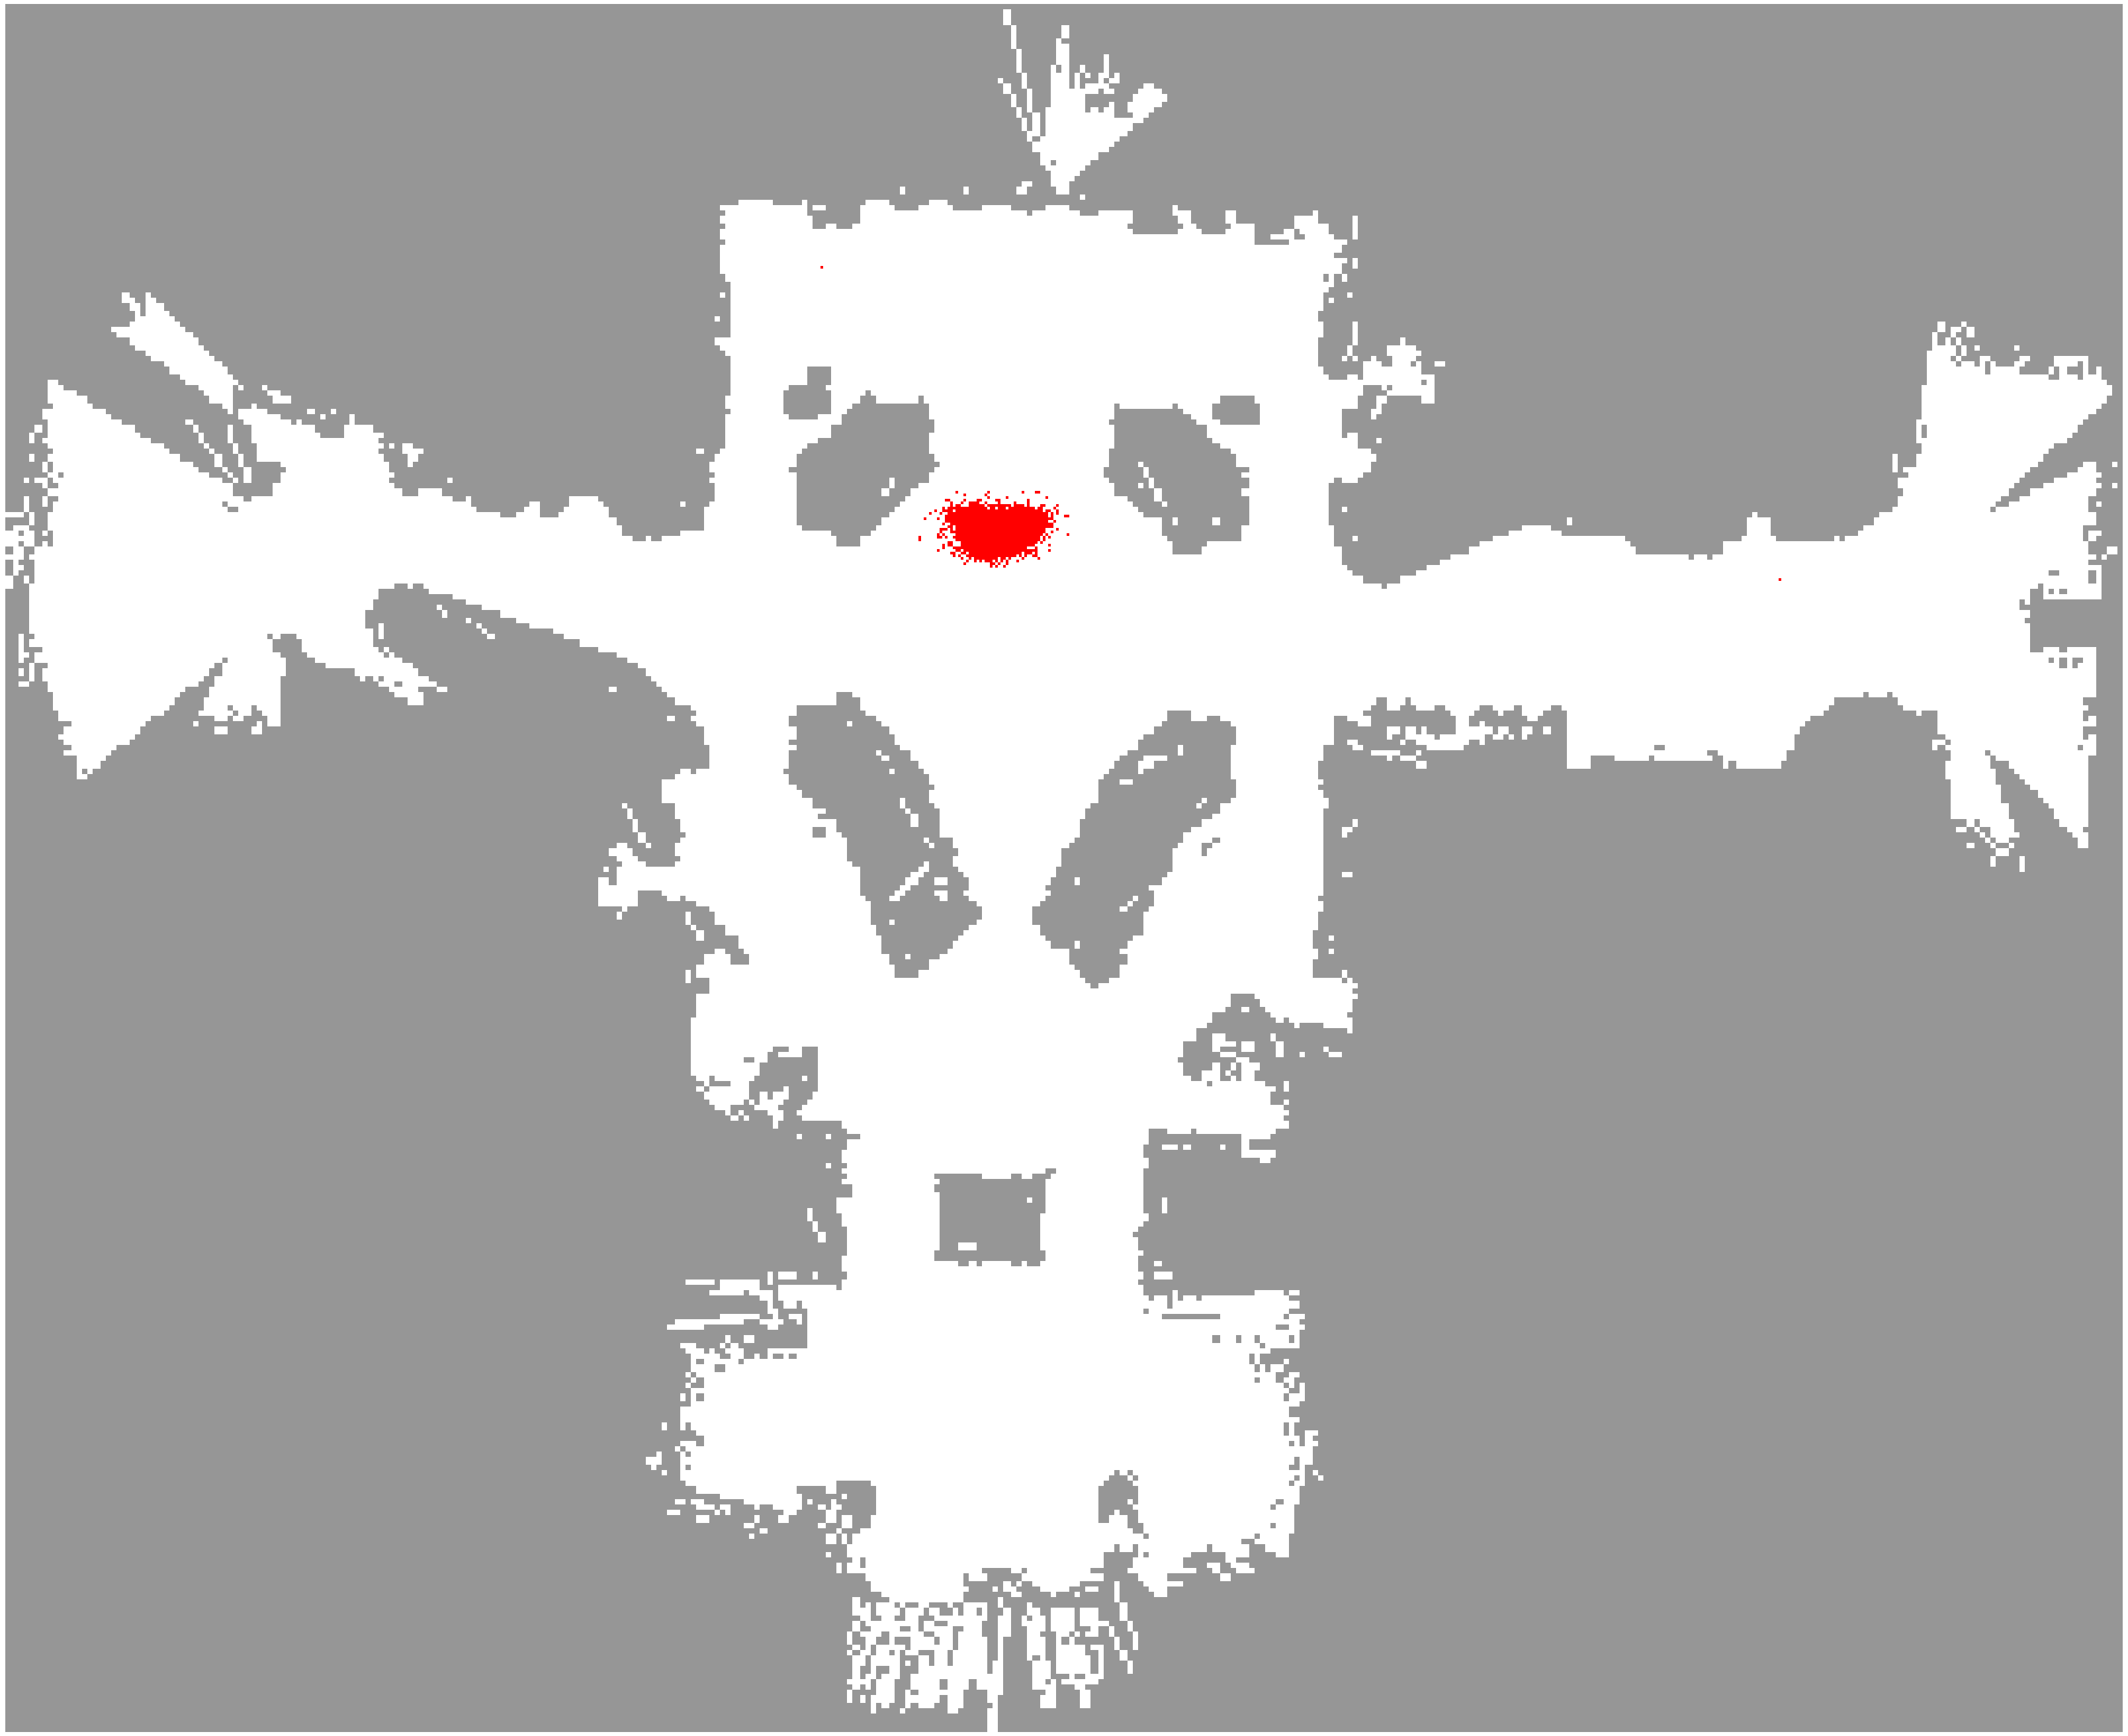

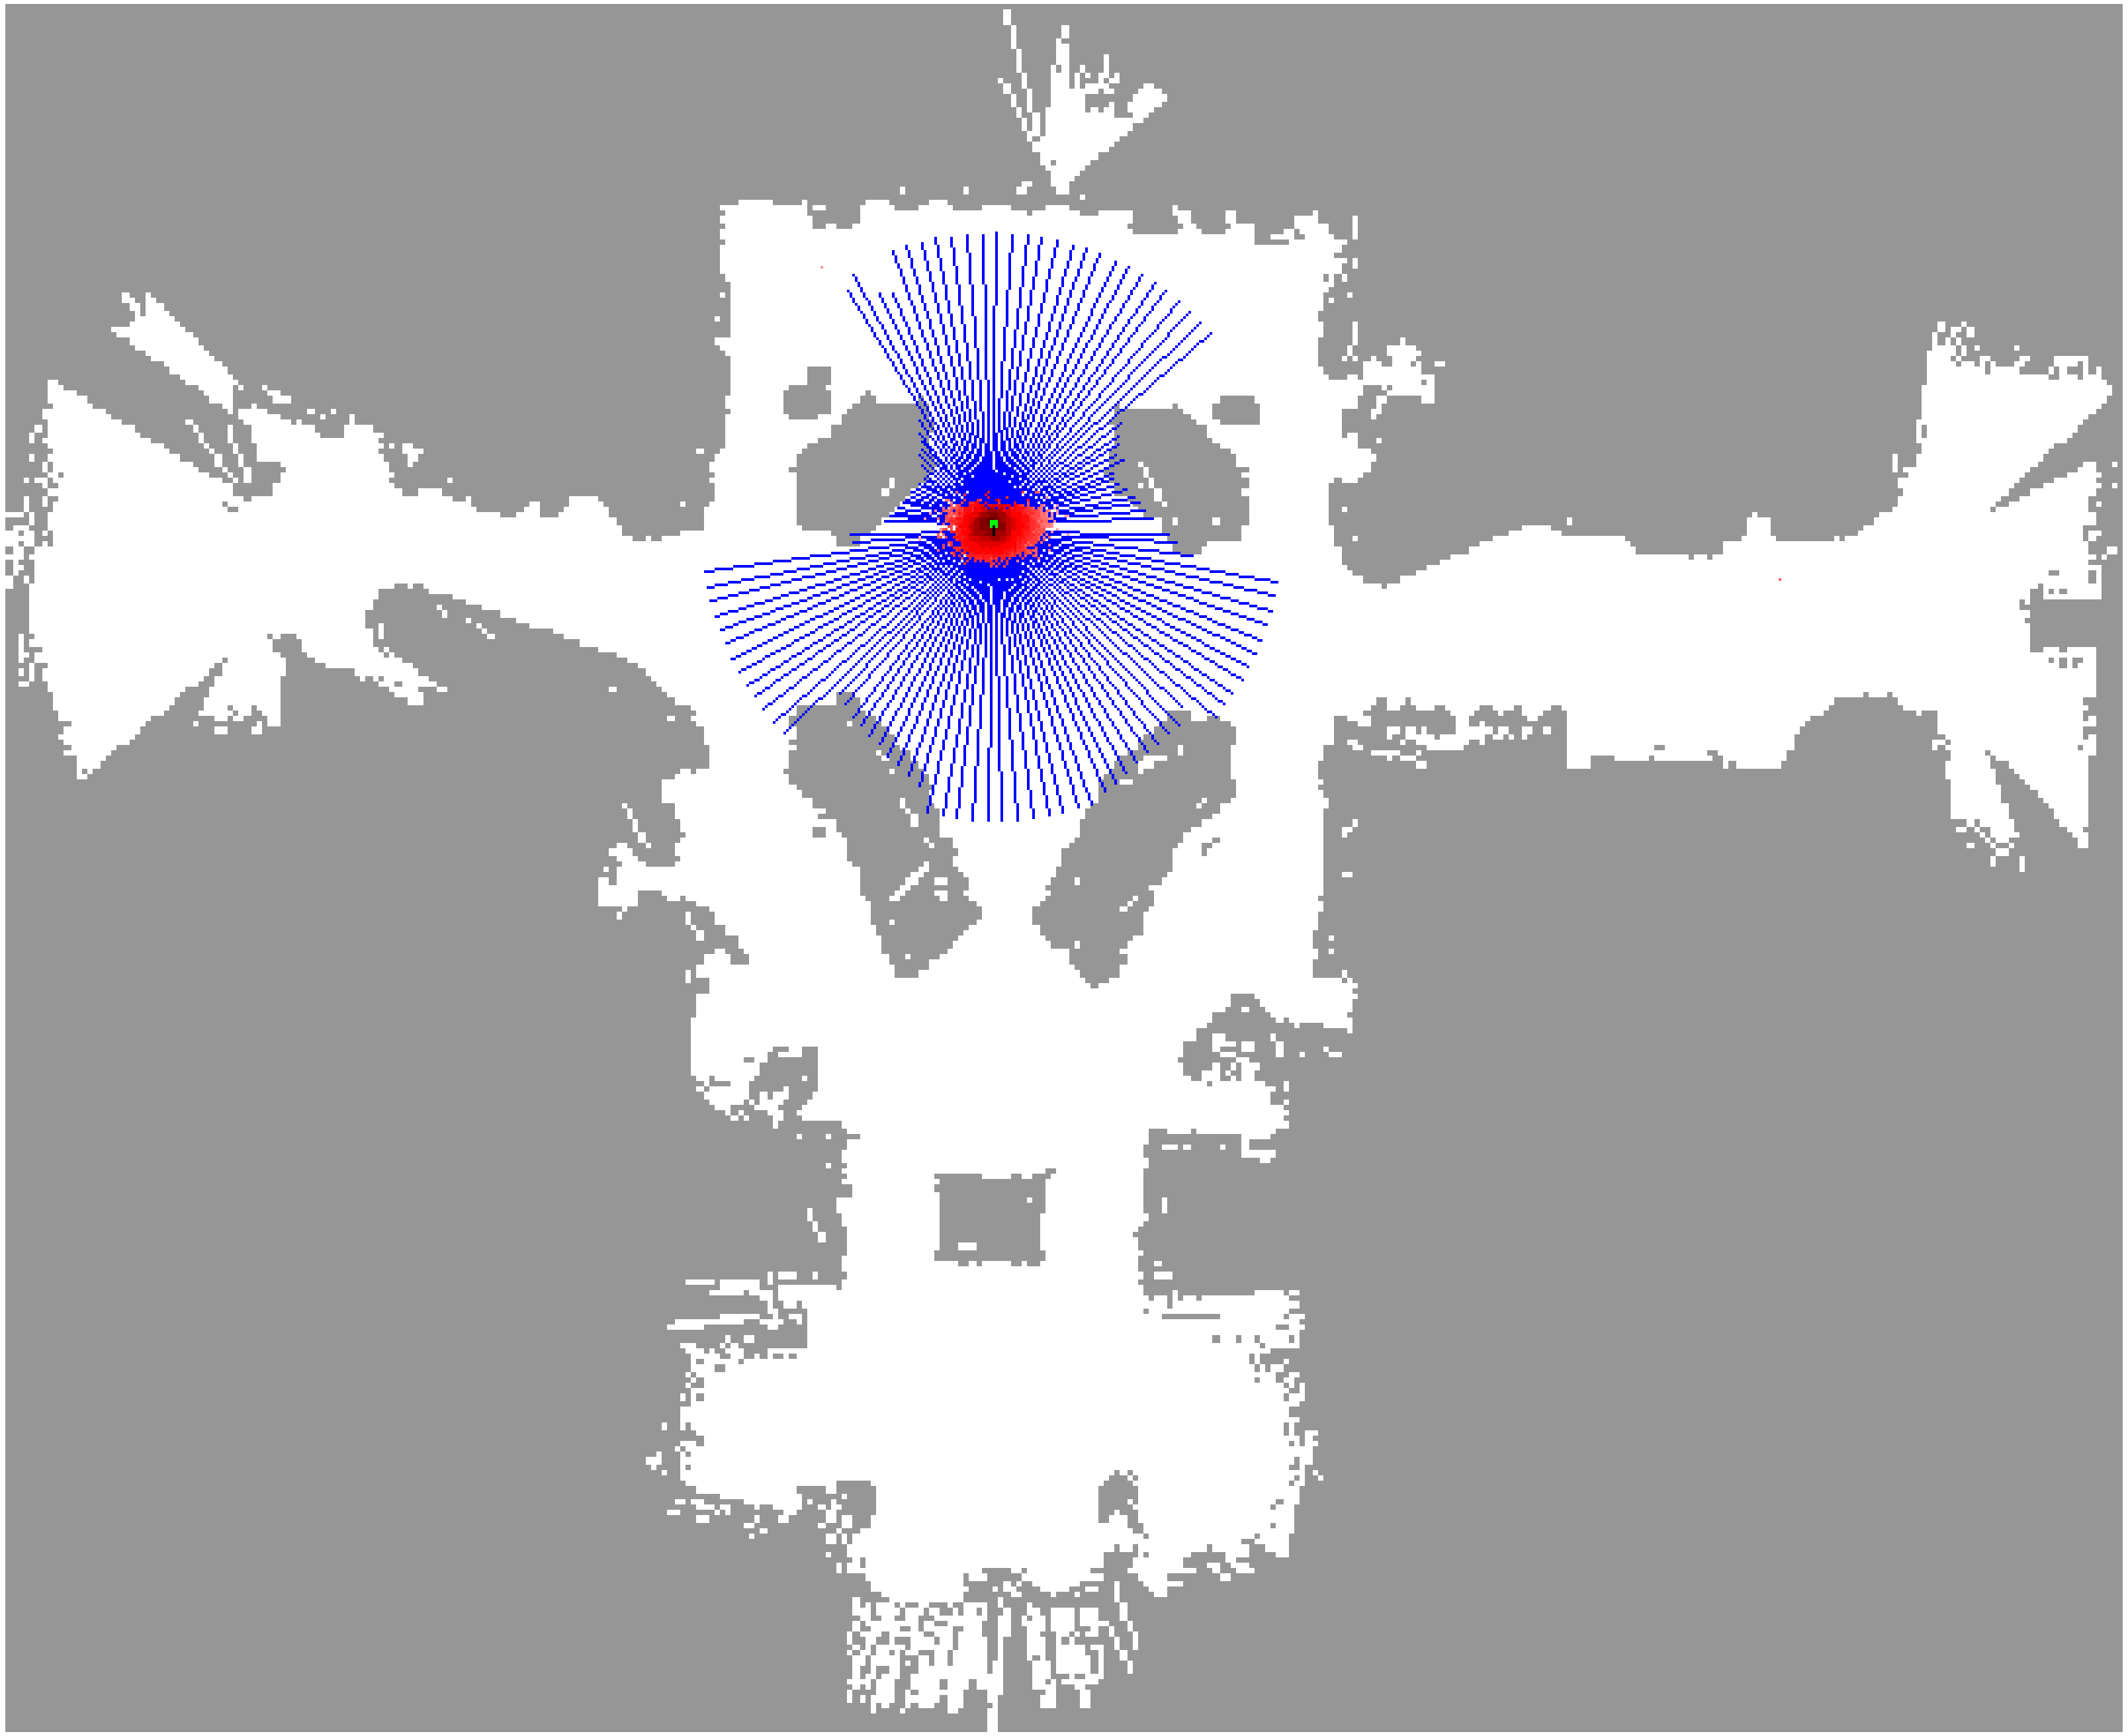

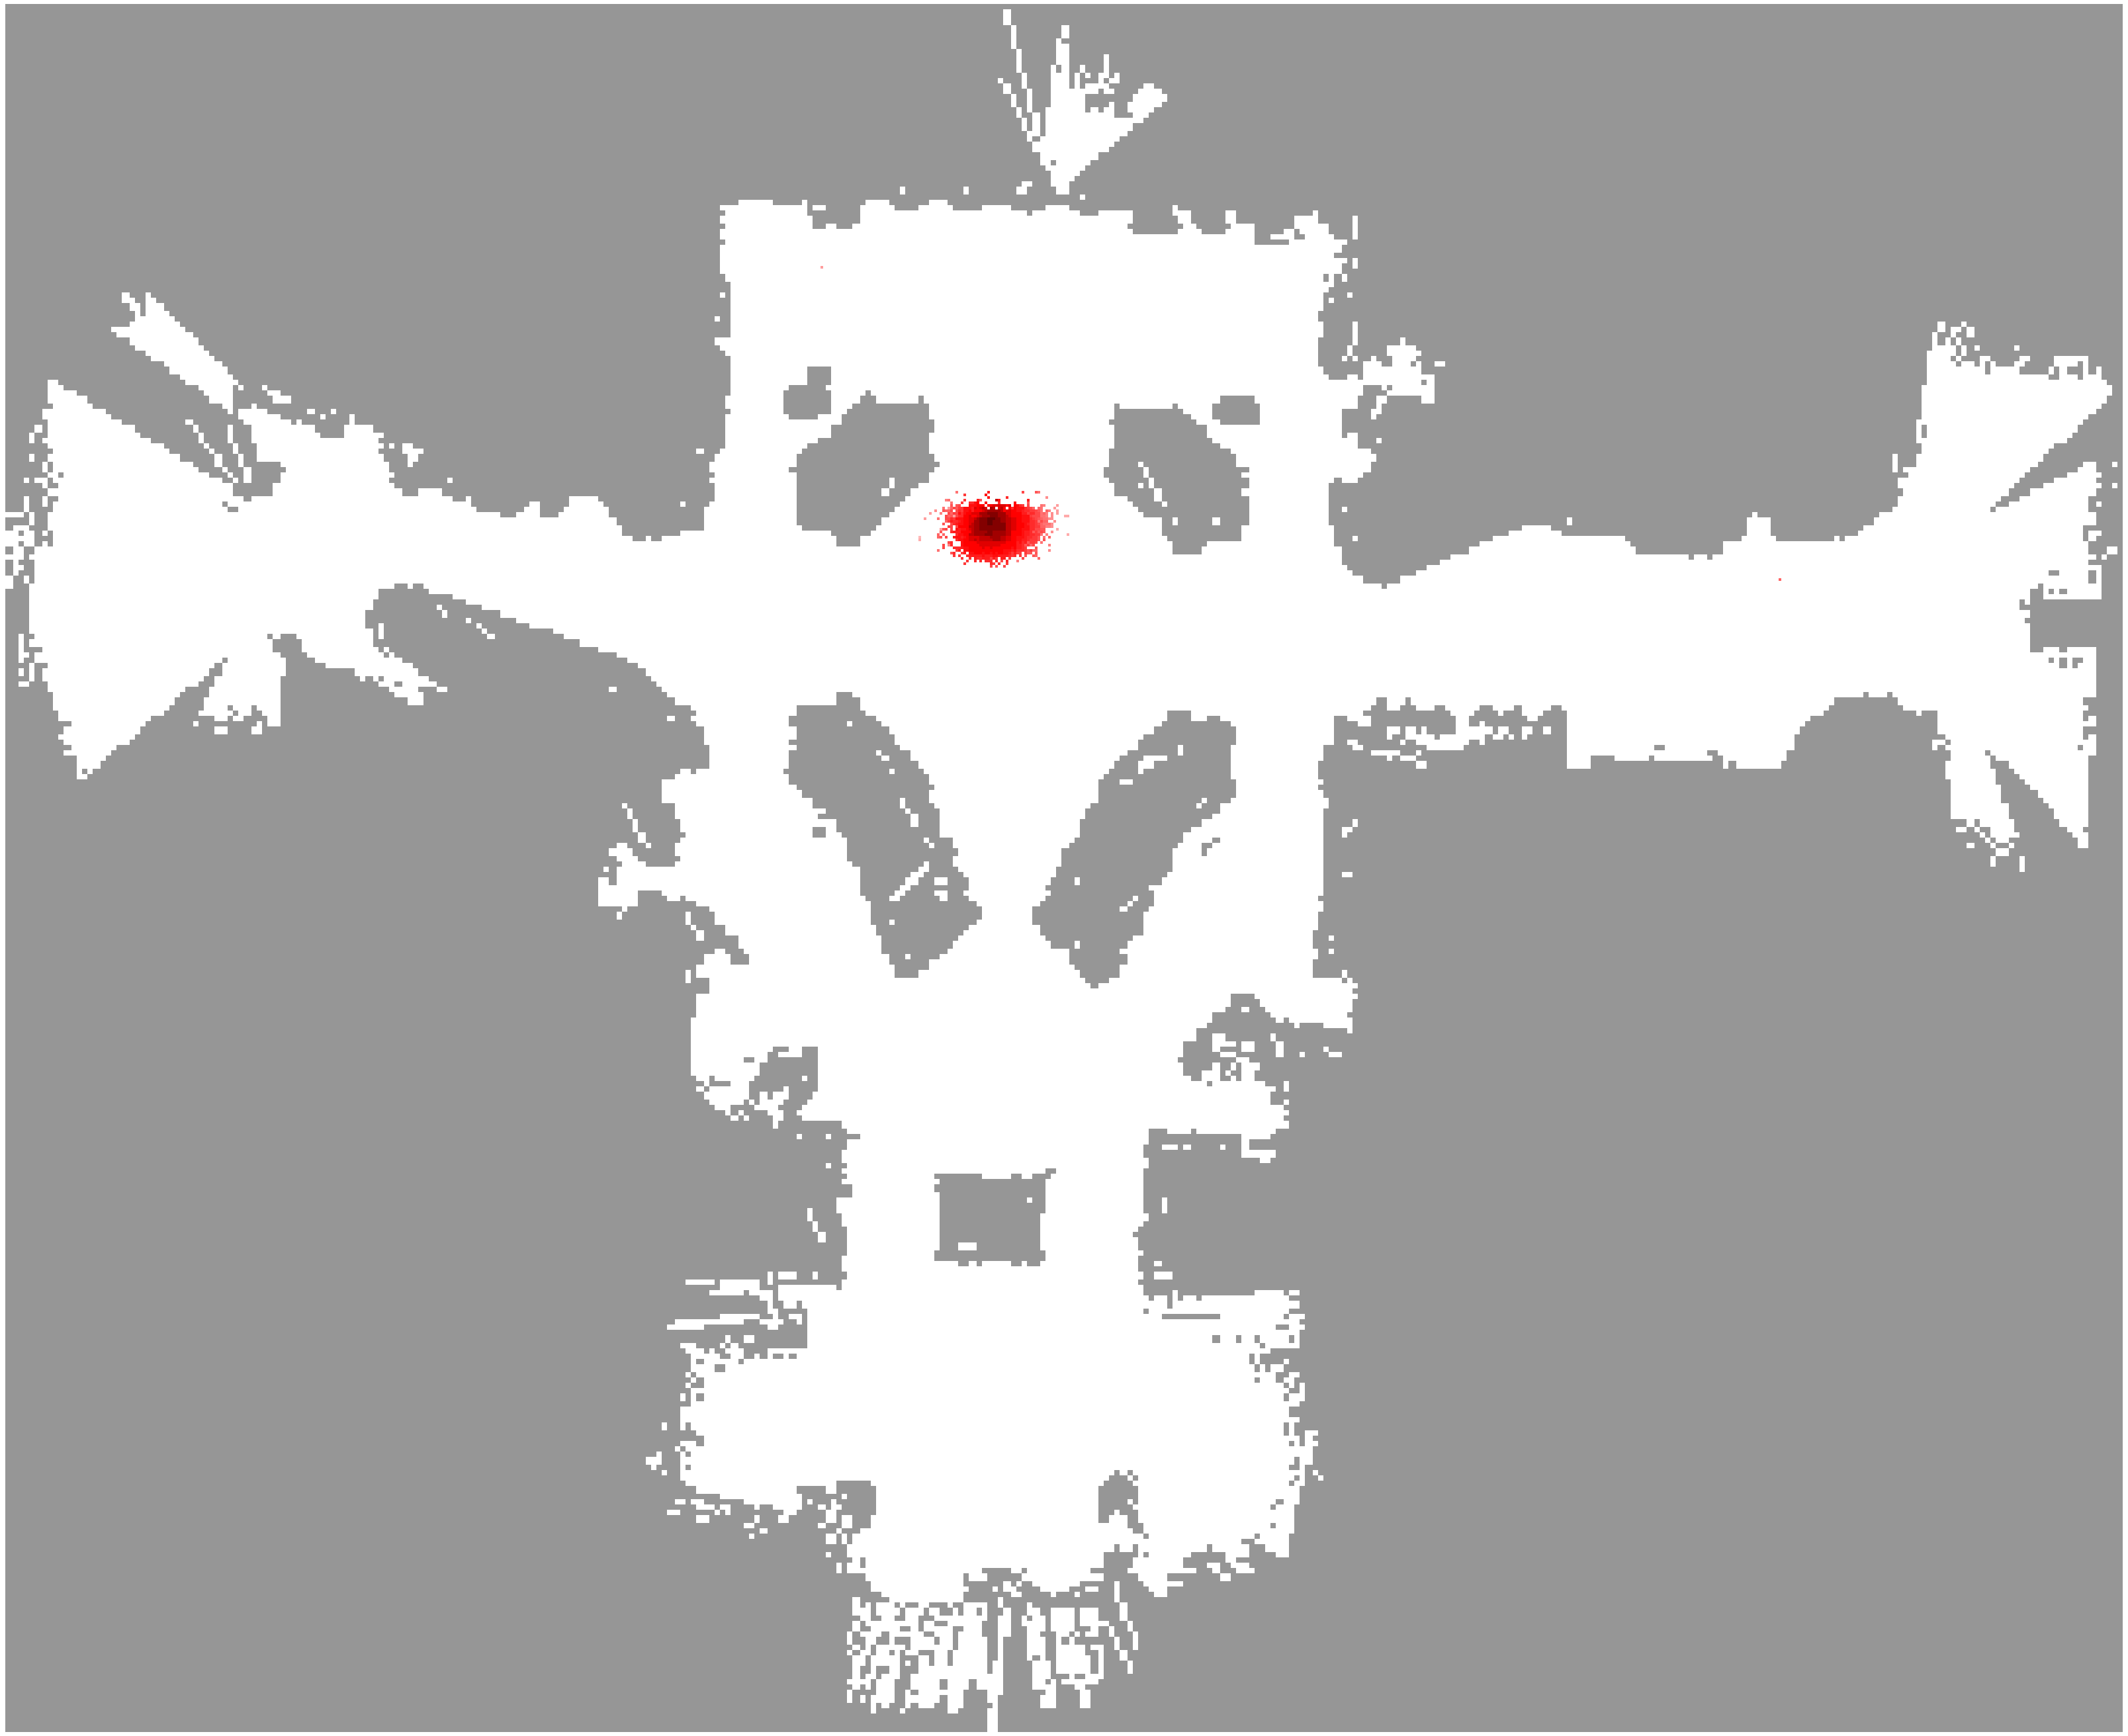

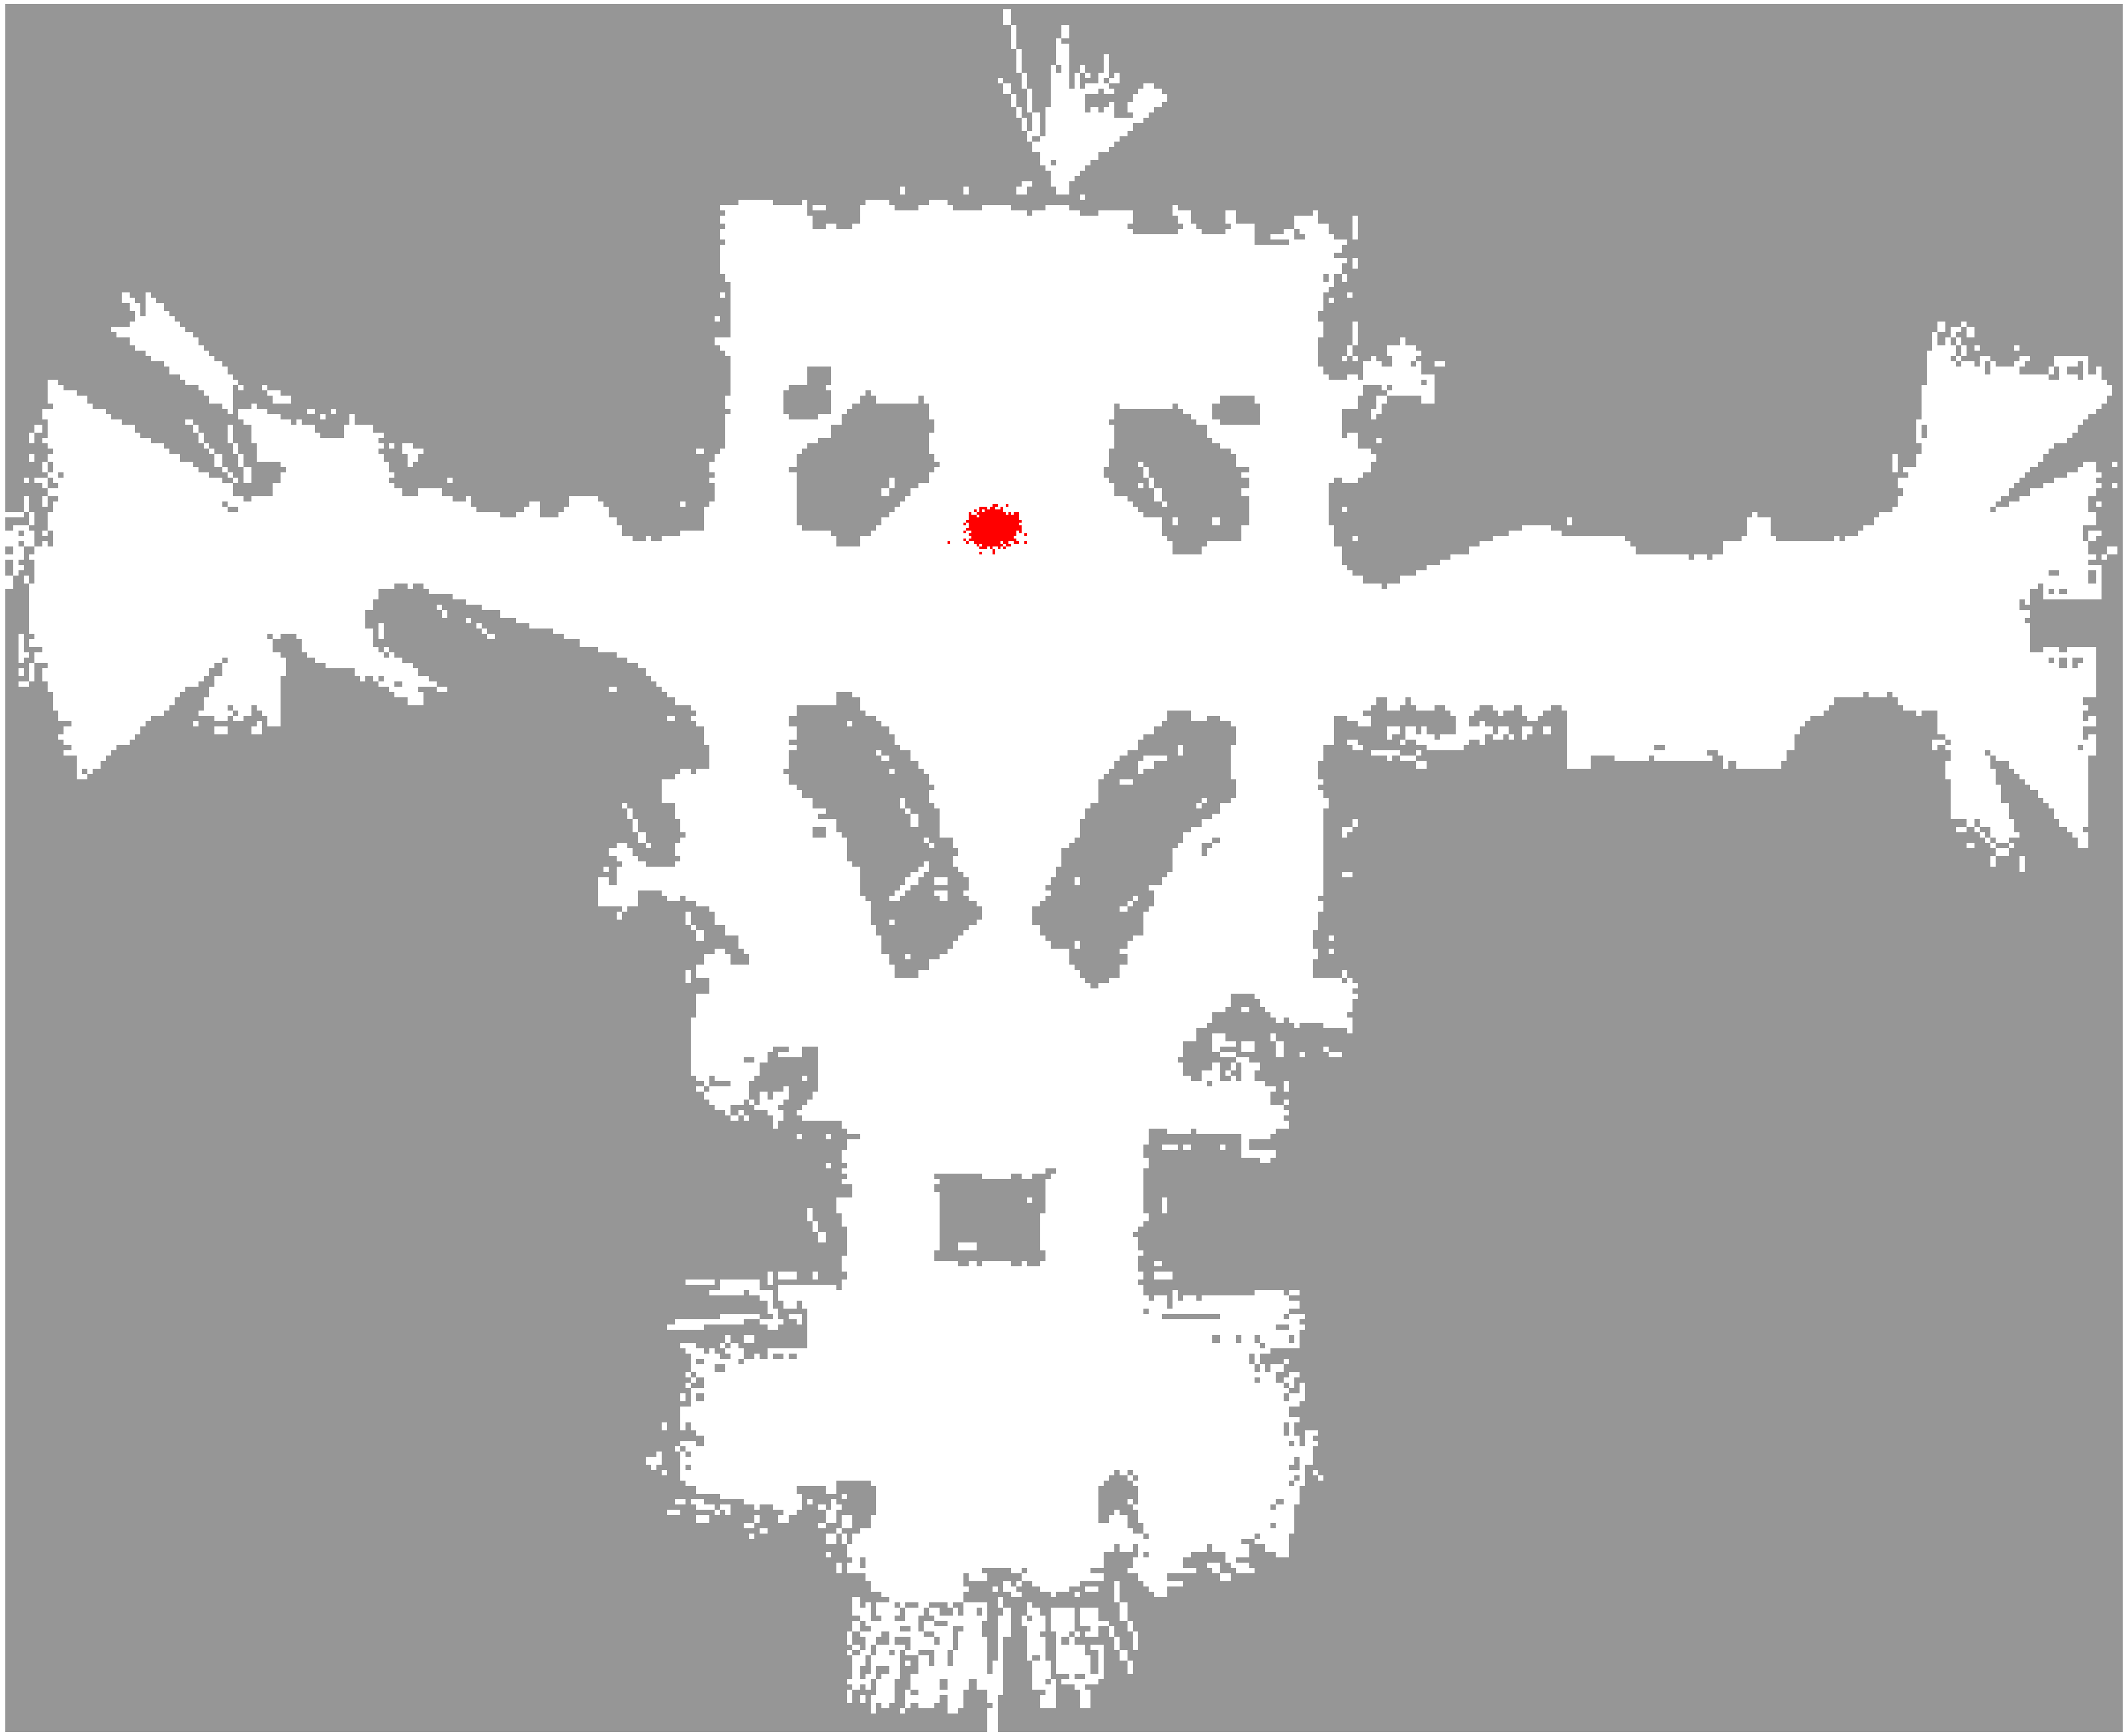

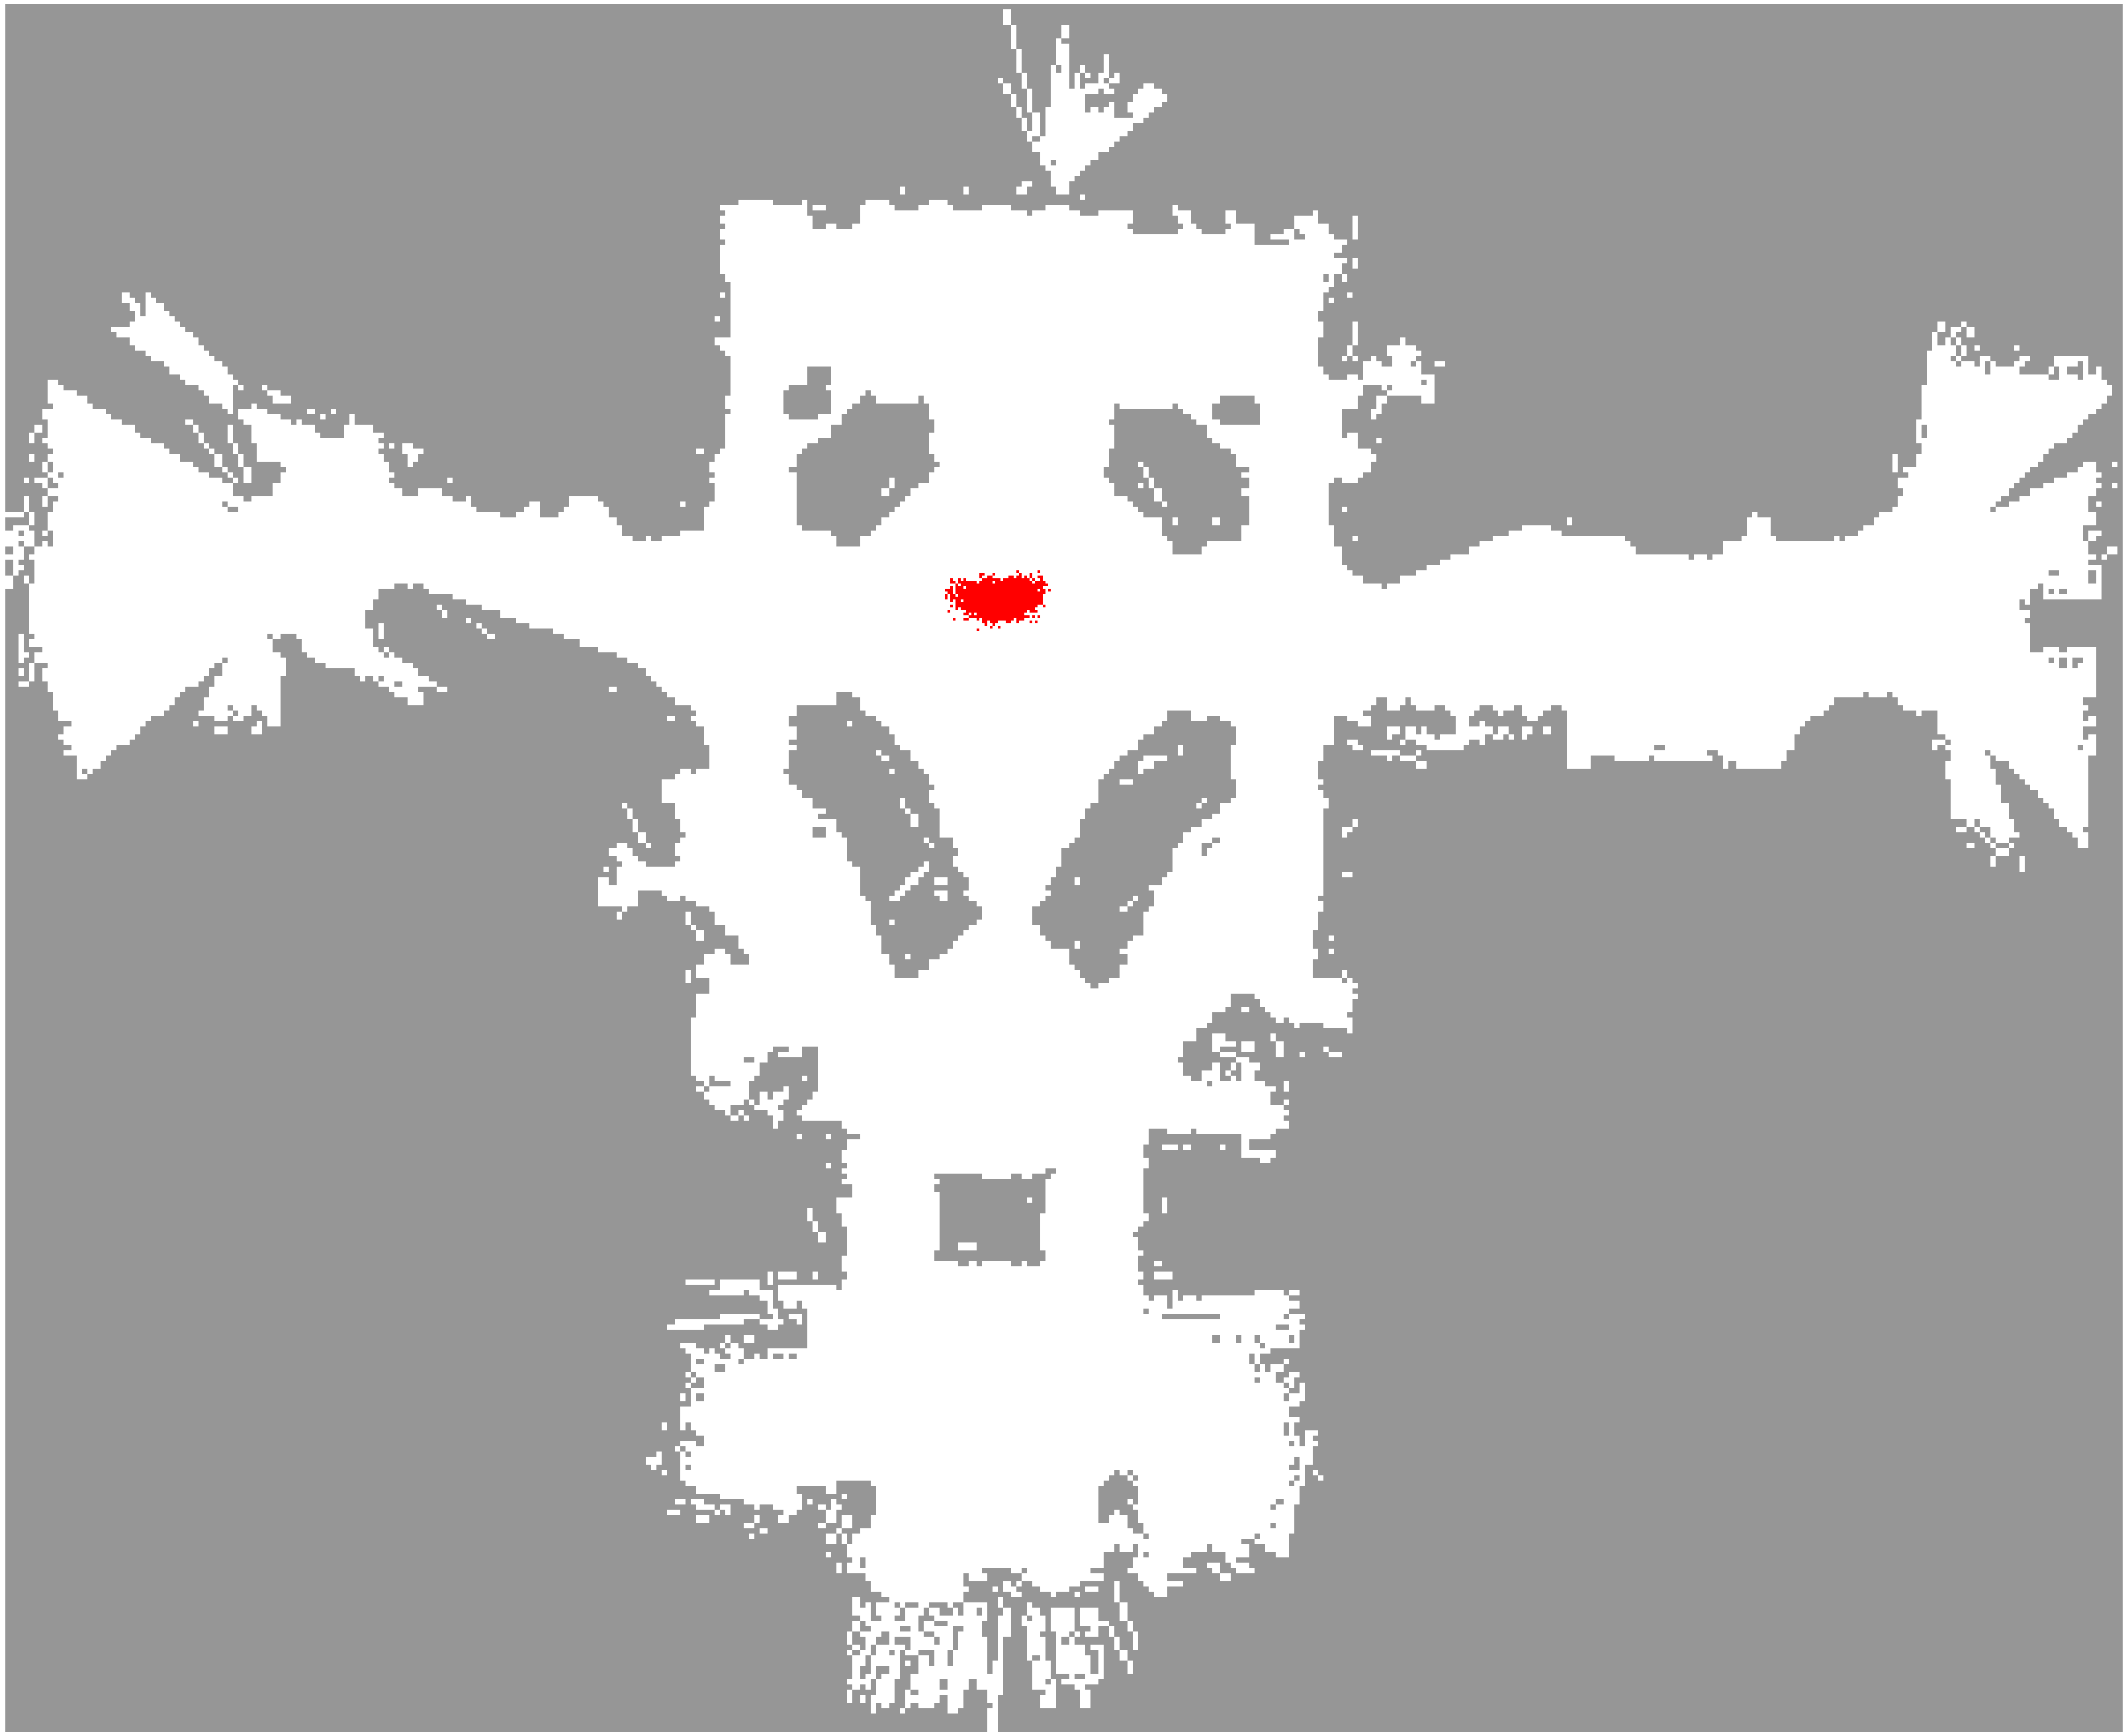

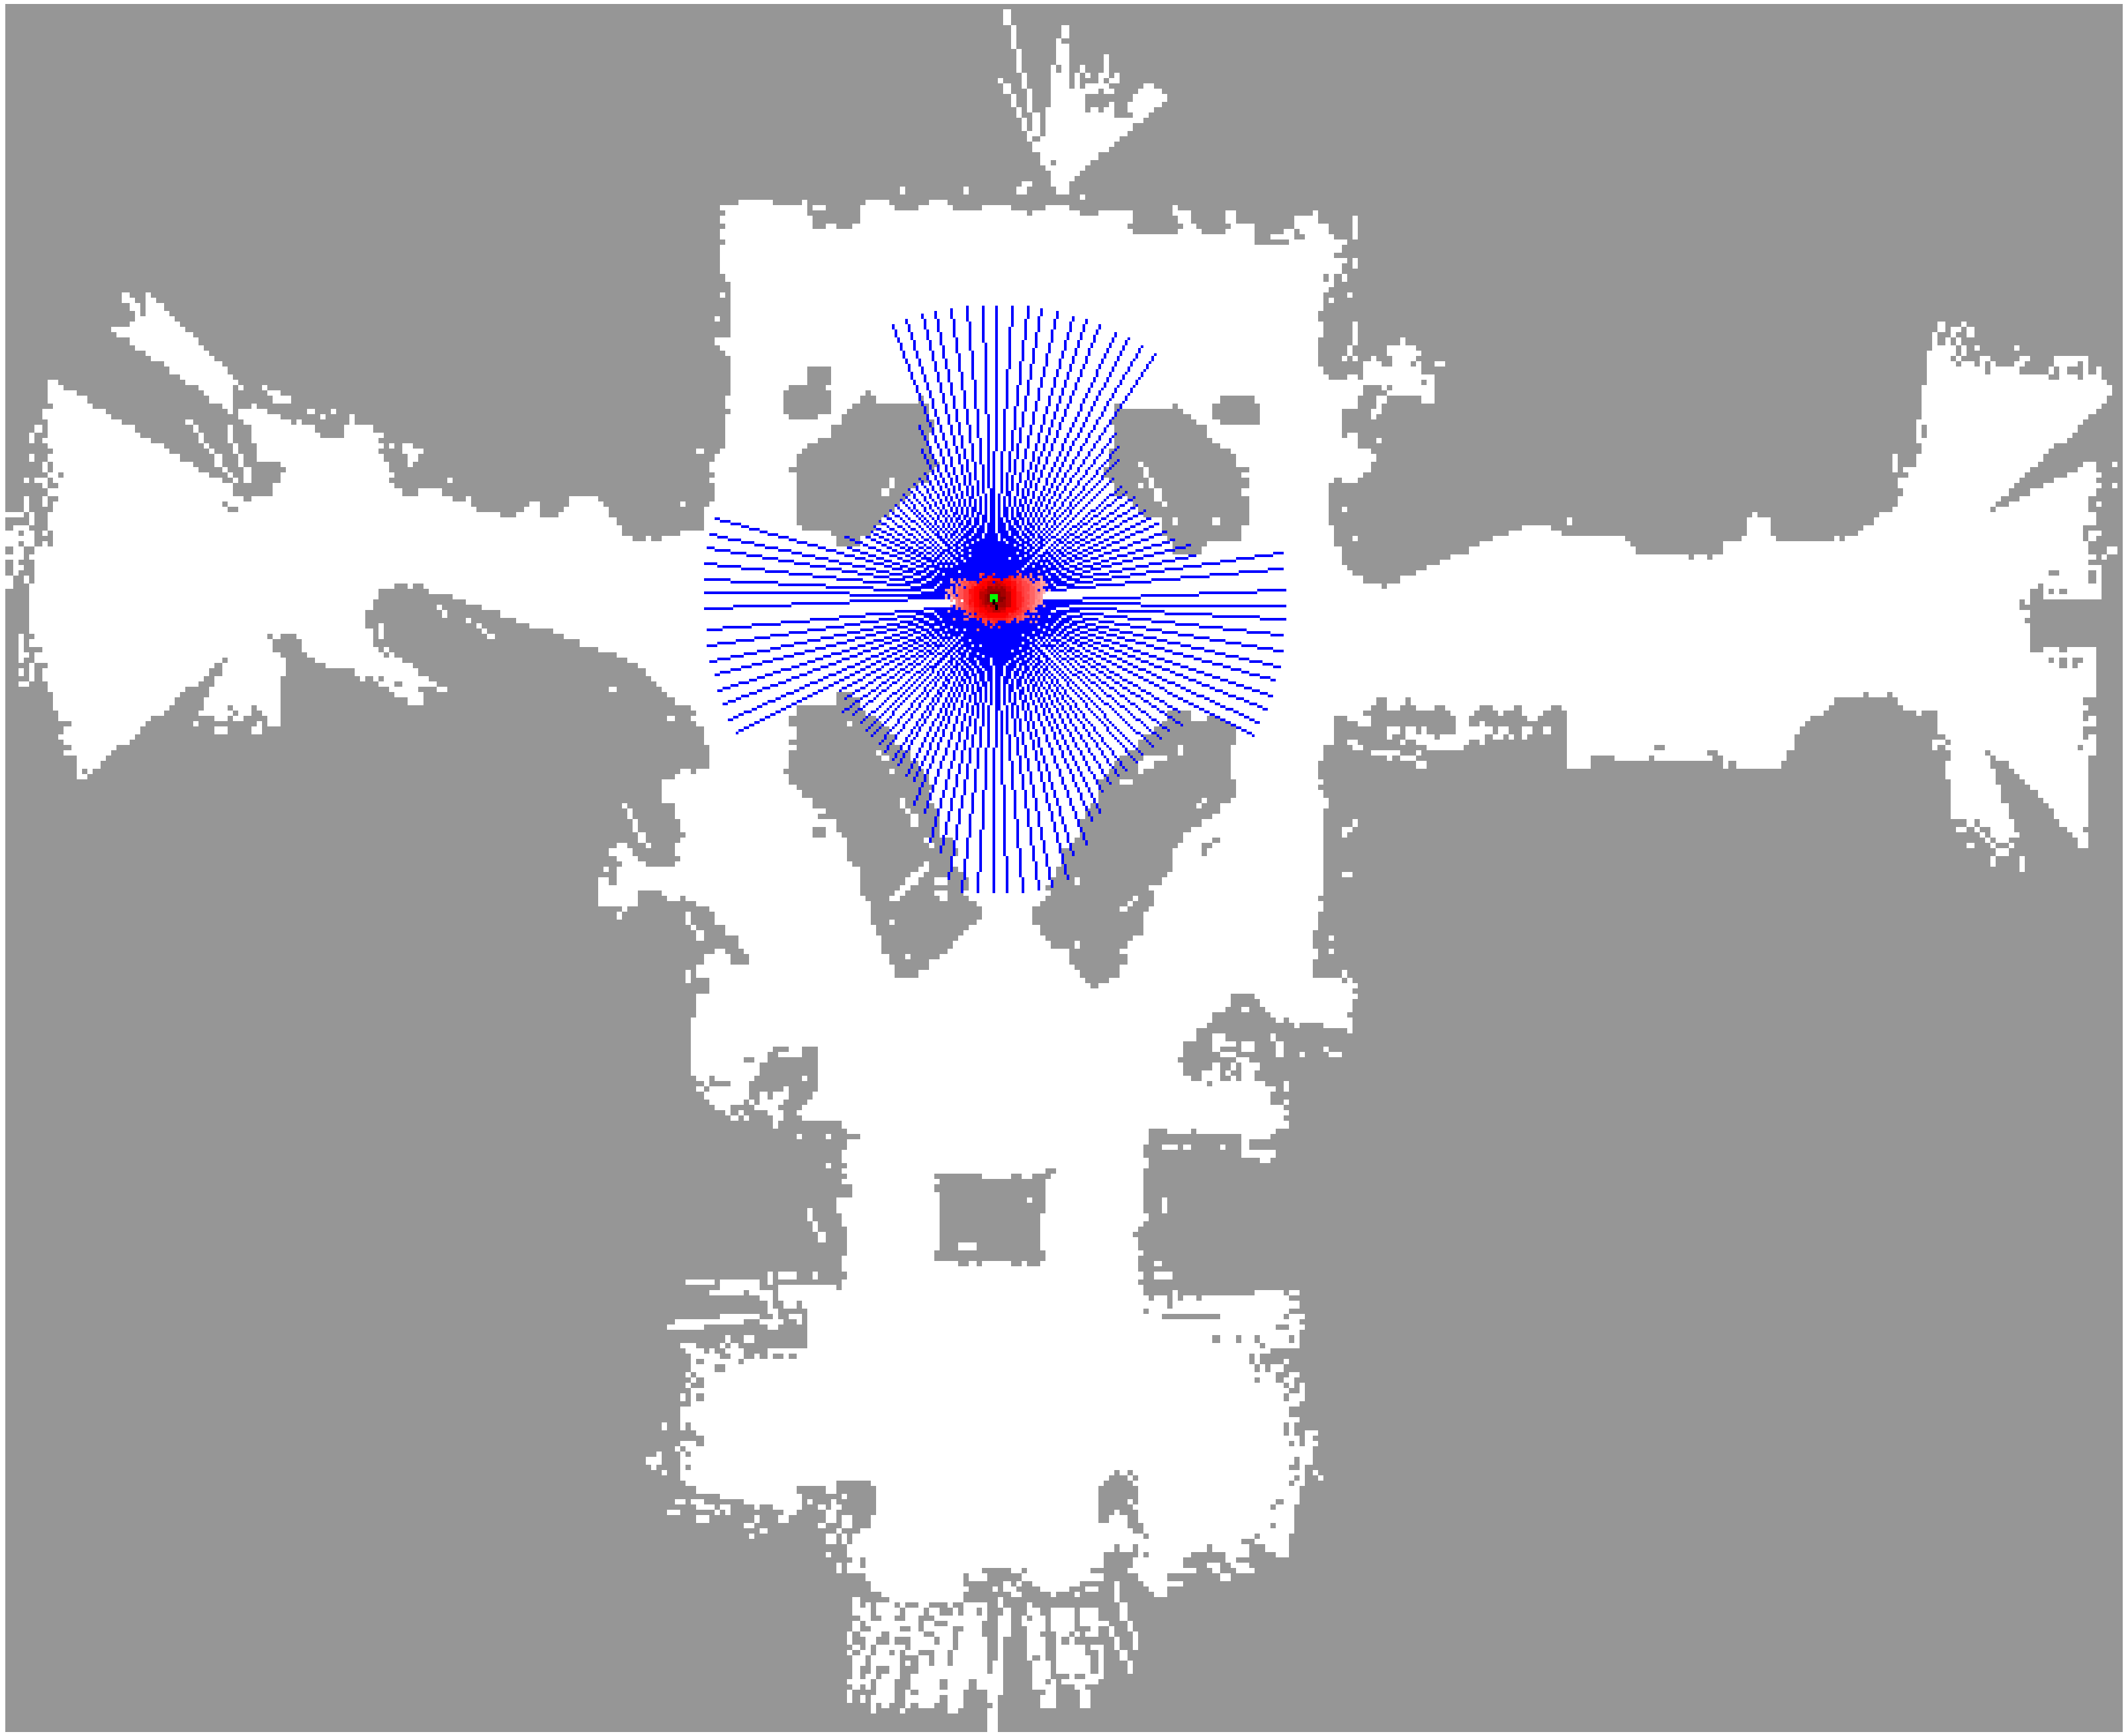

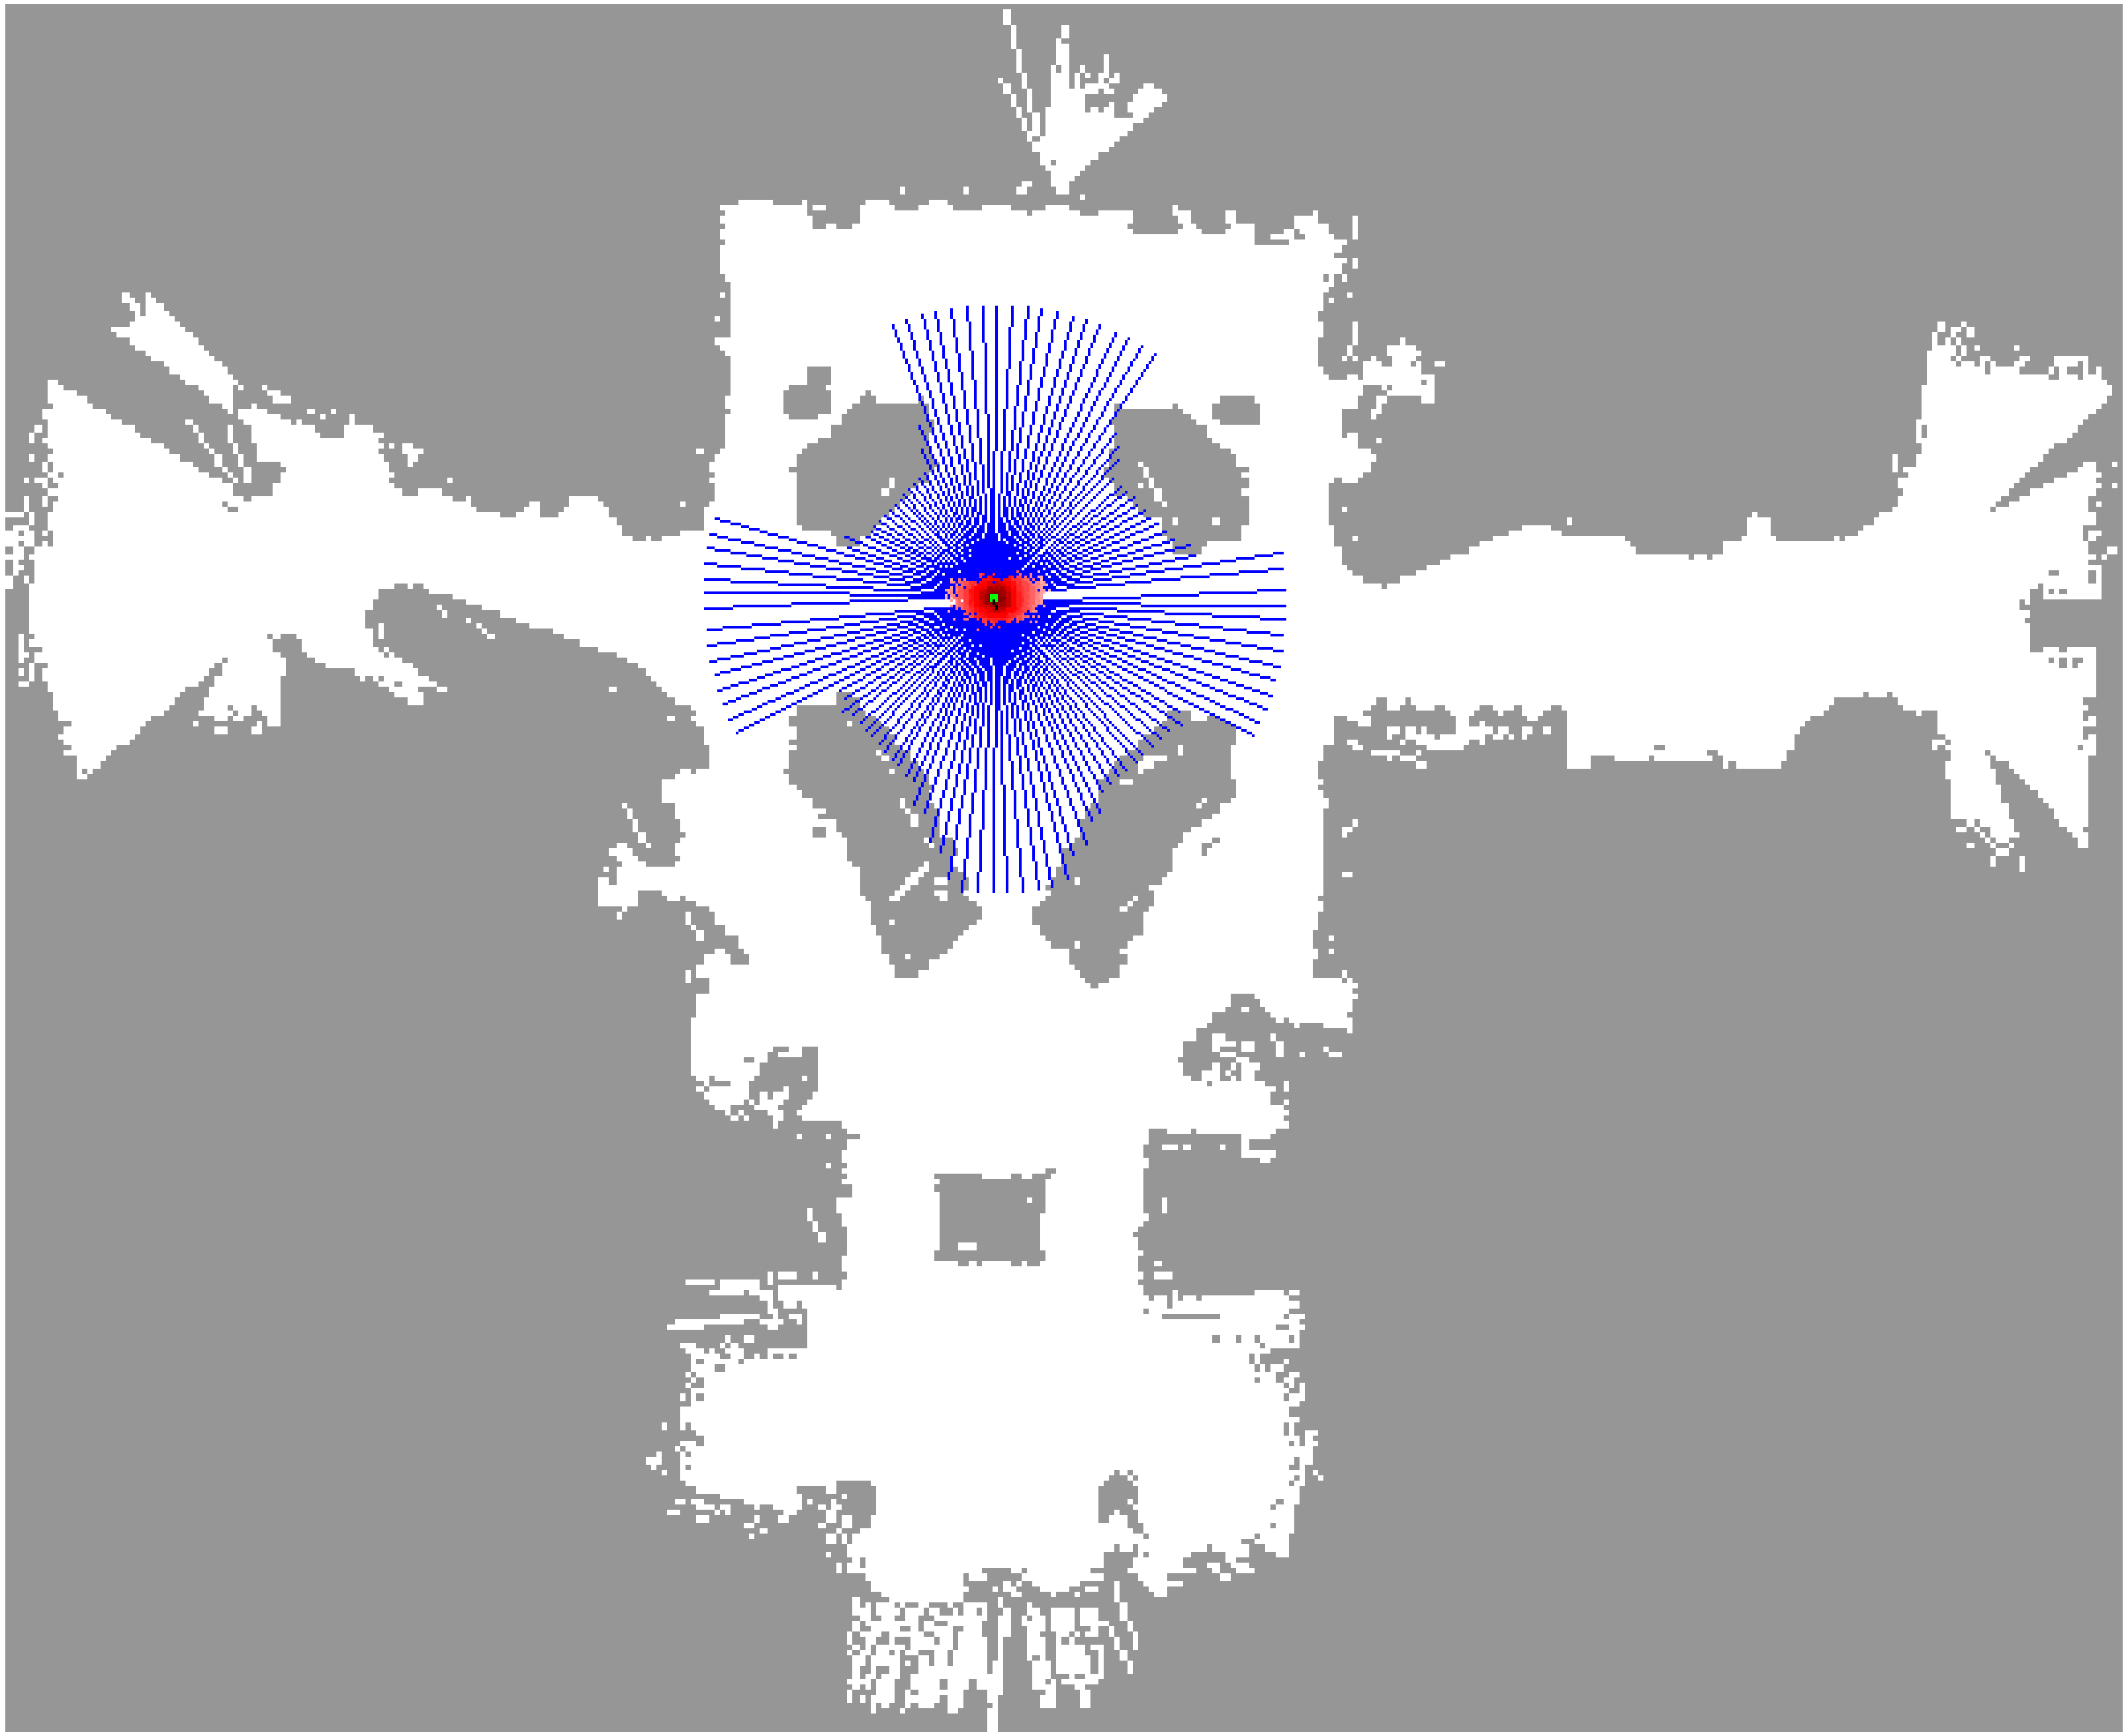

Sample-based Localization (sonar)

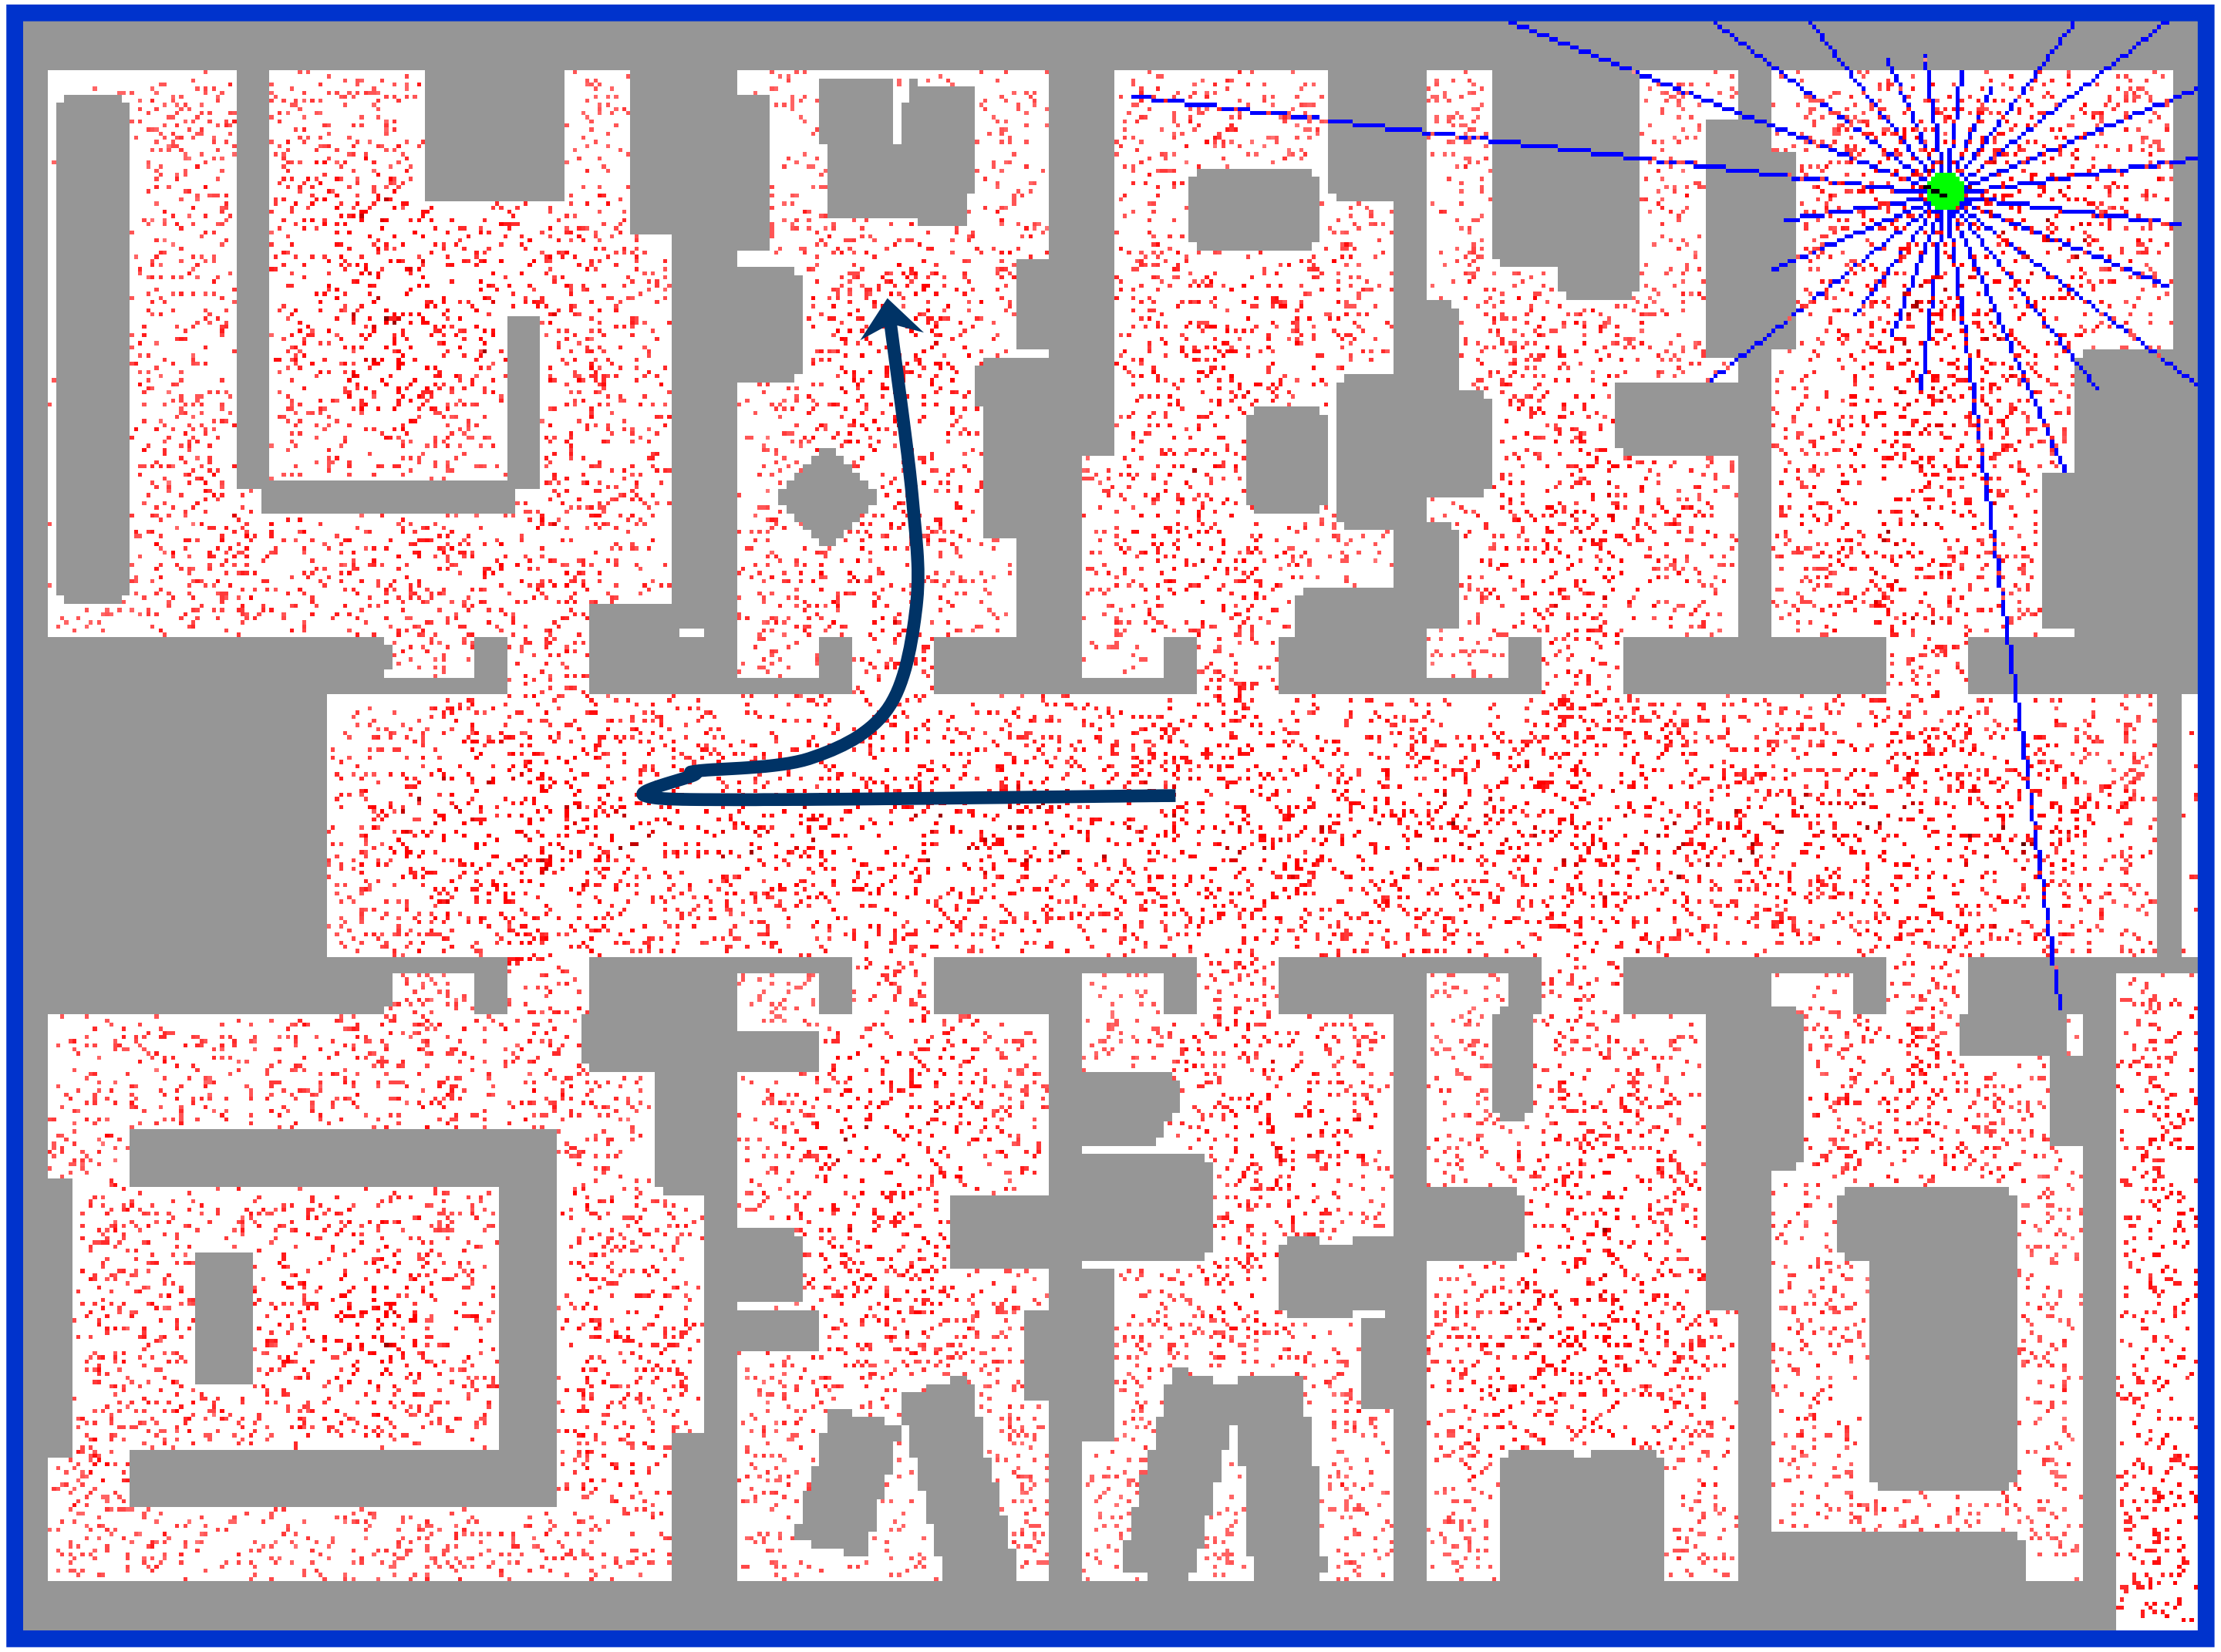

Initial Distribution

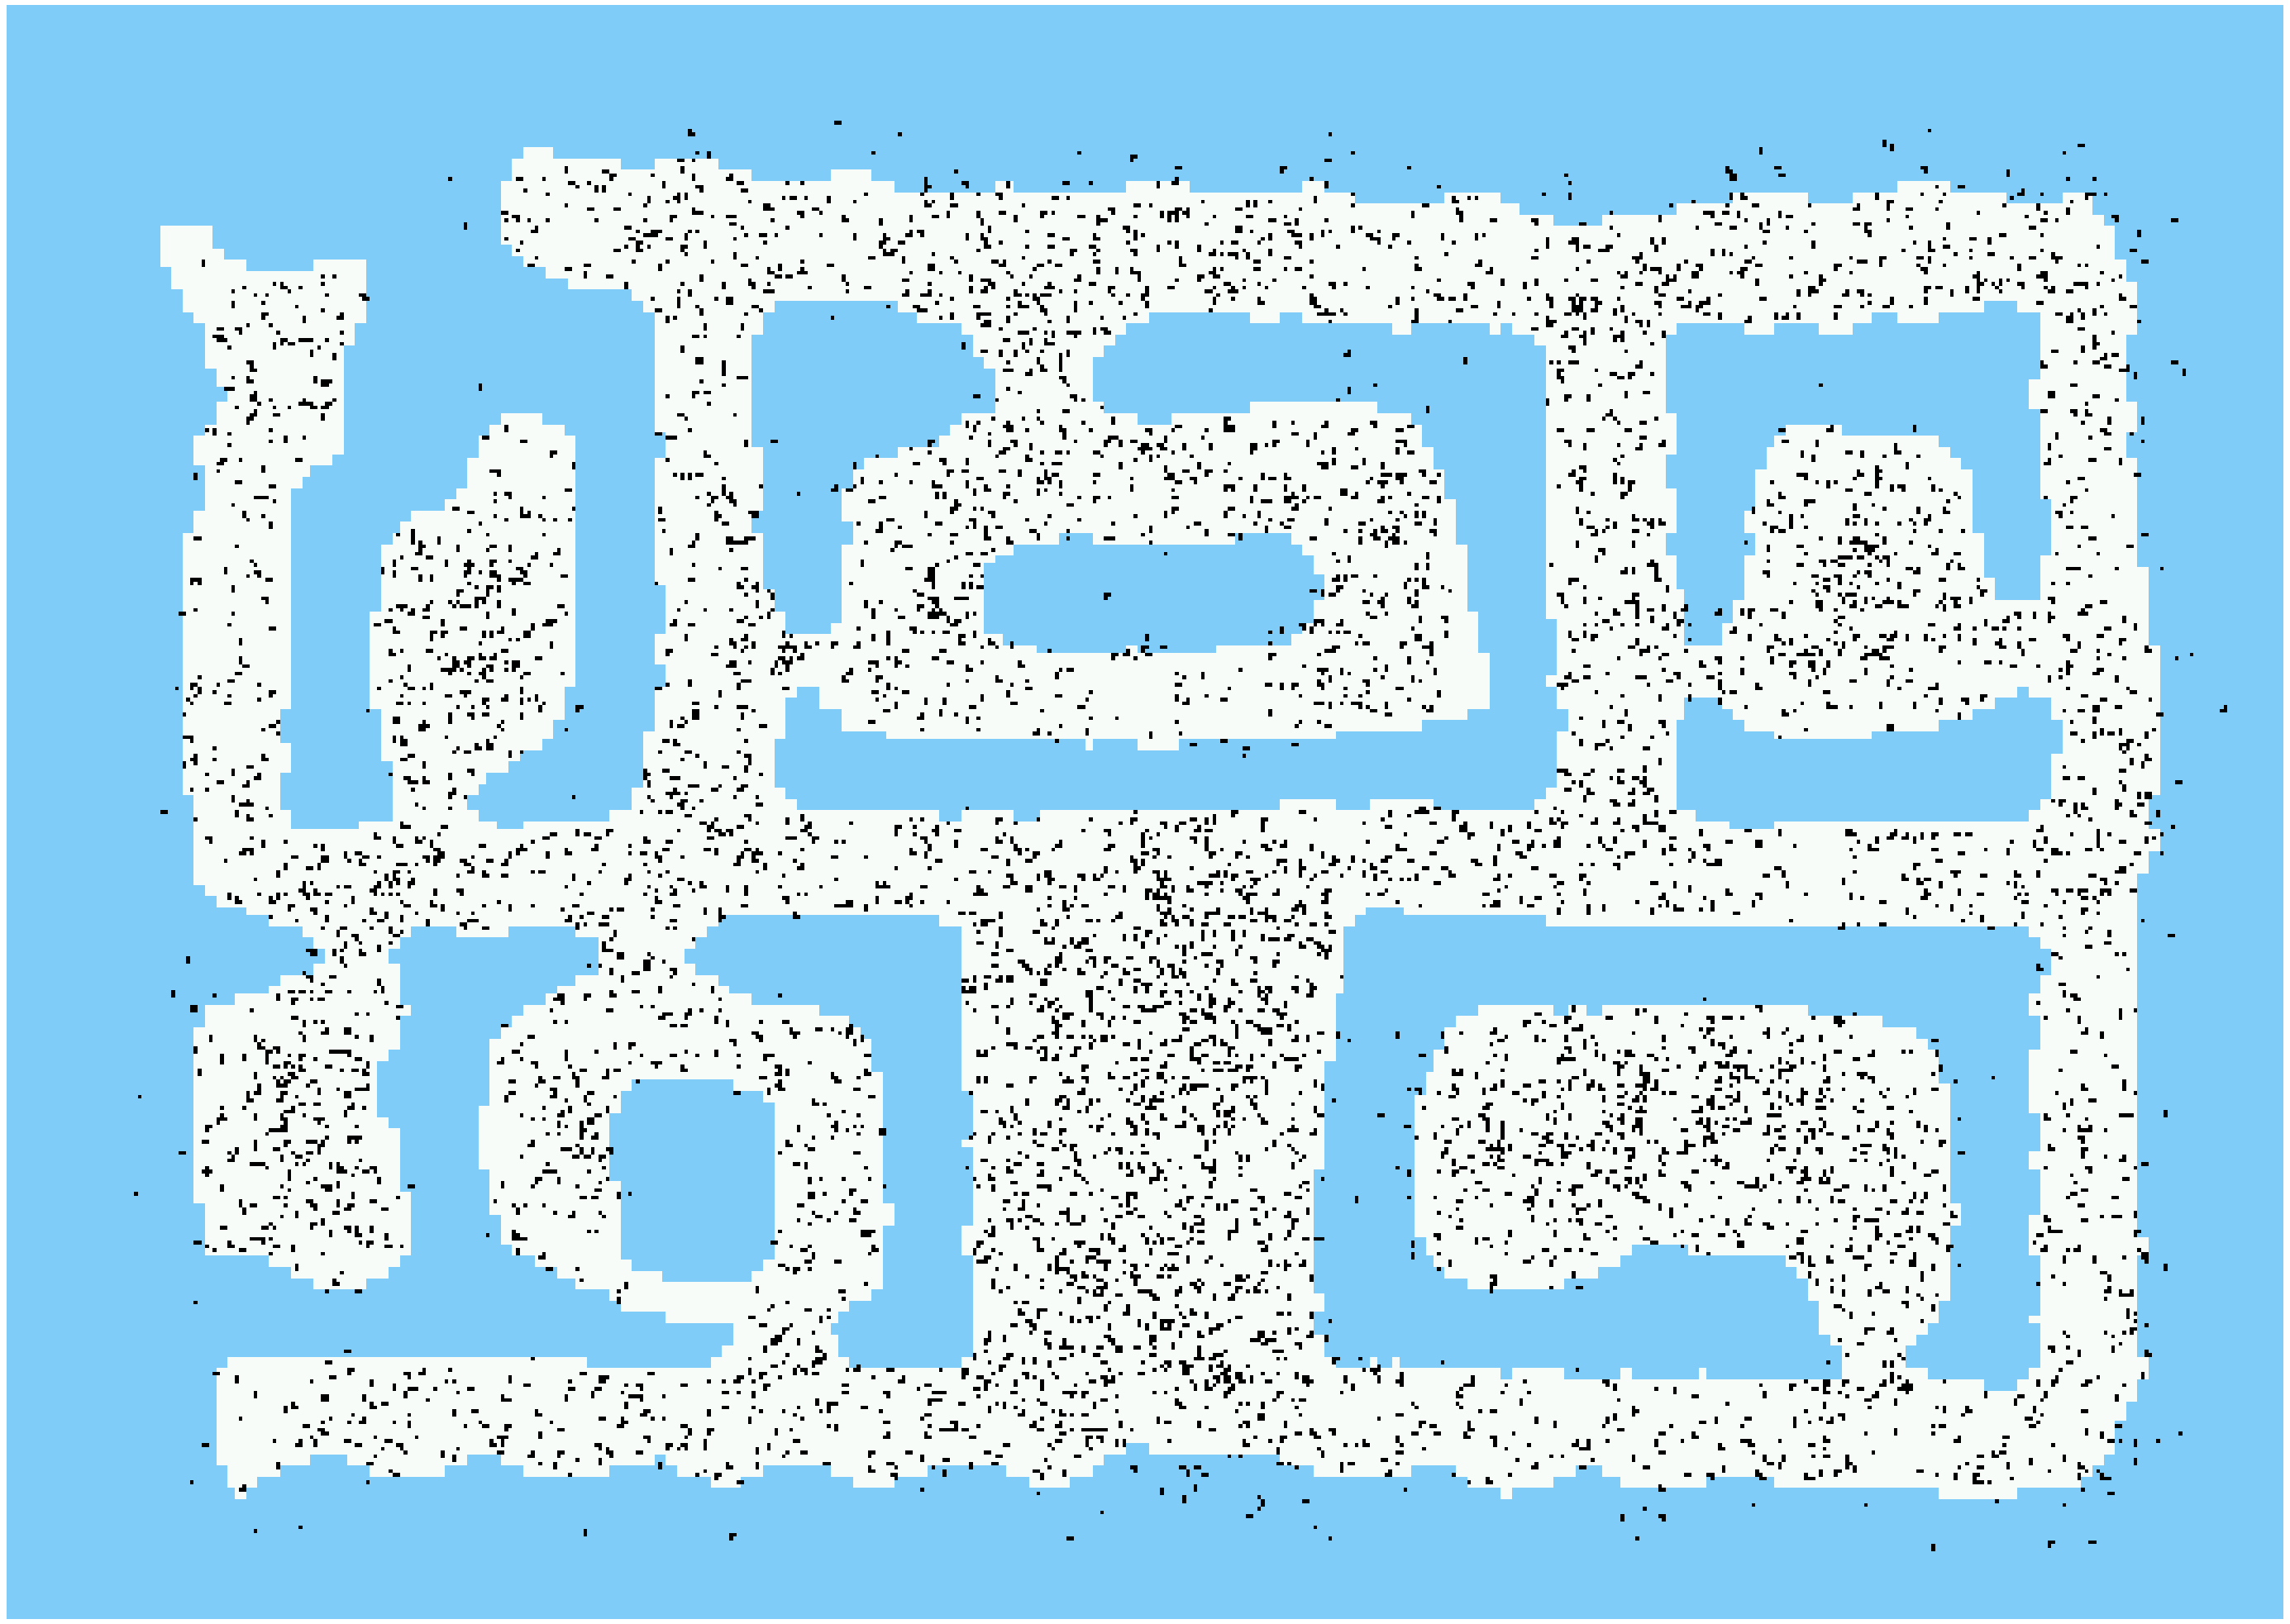

After Incorporating Ten Ultrasound Scans

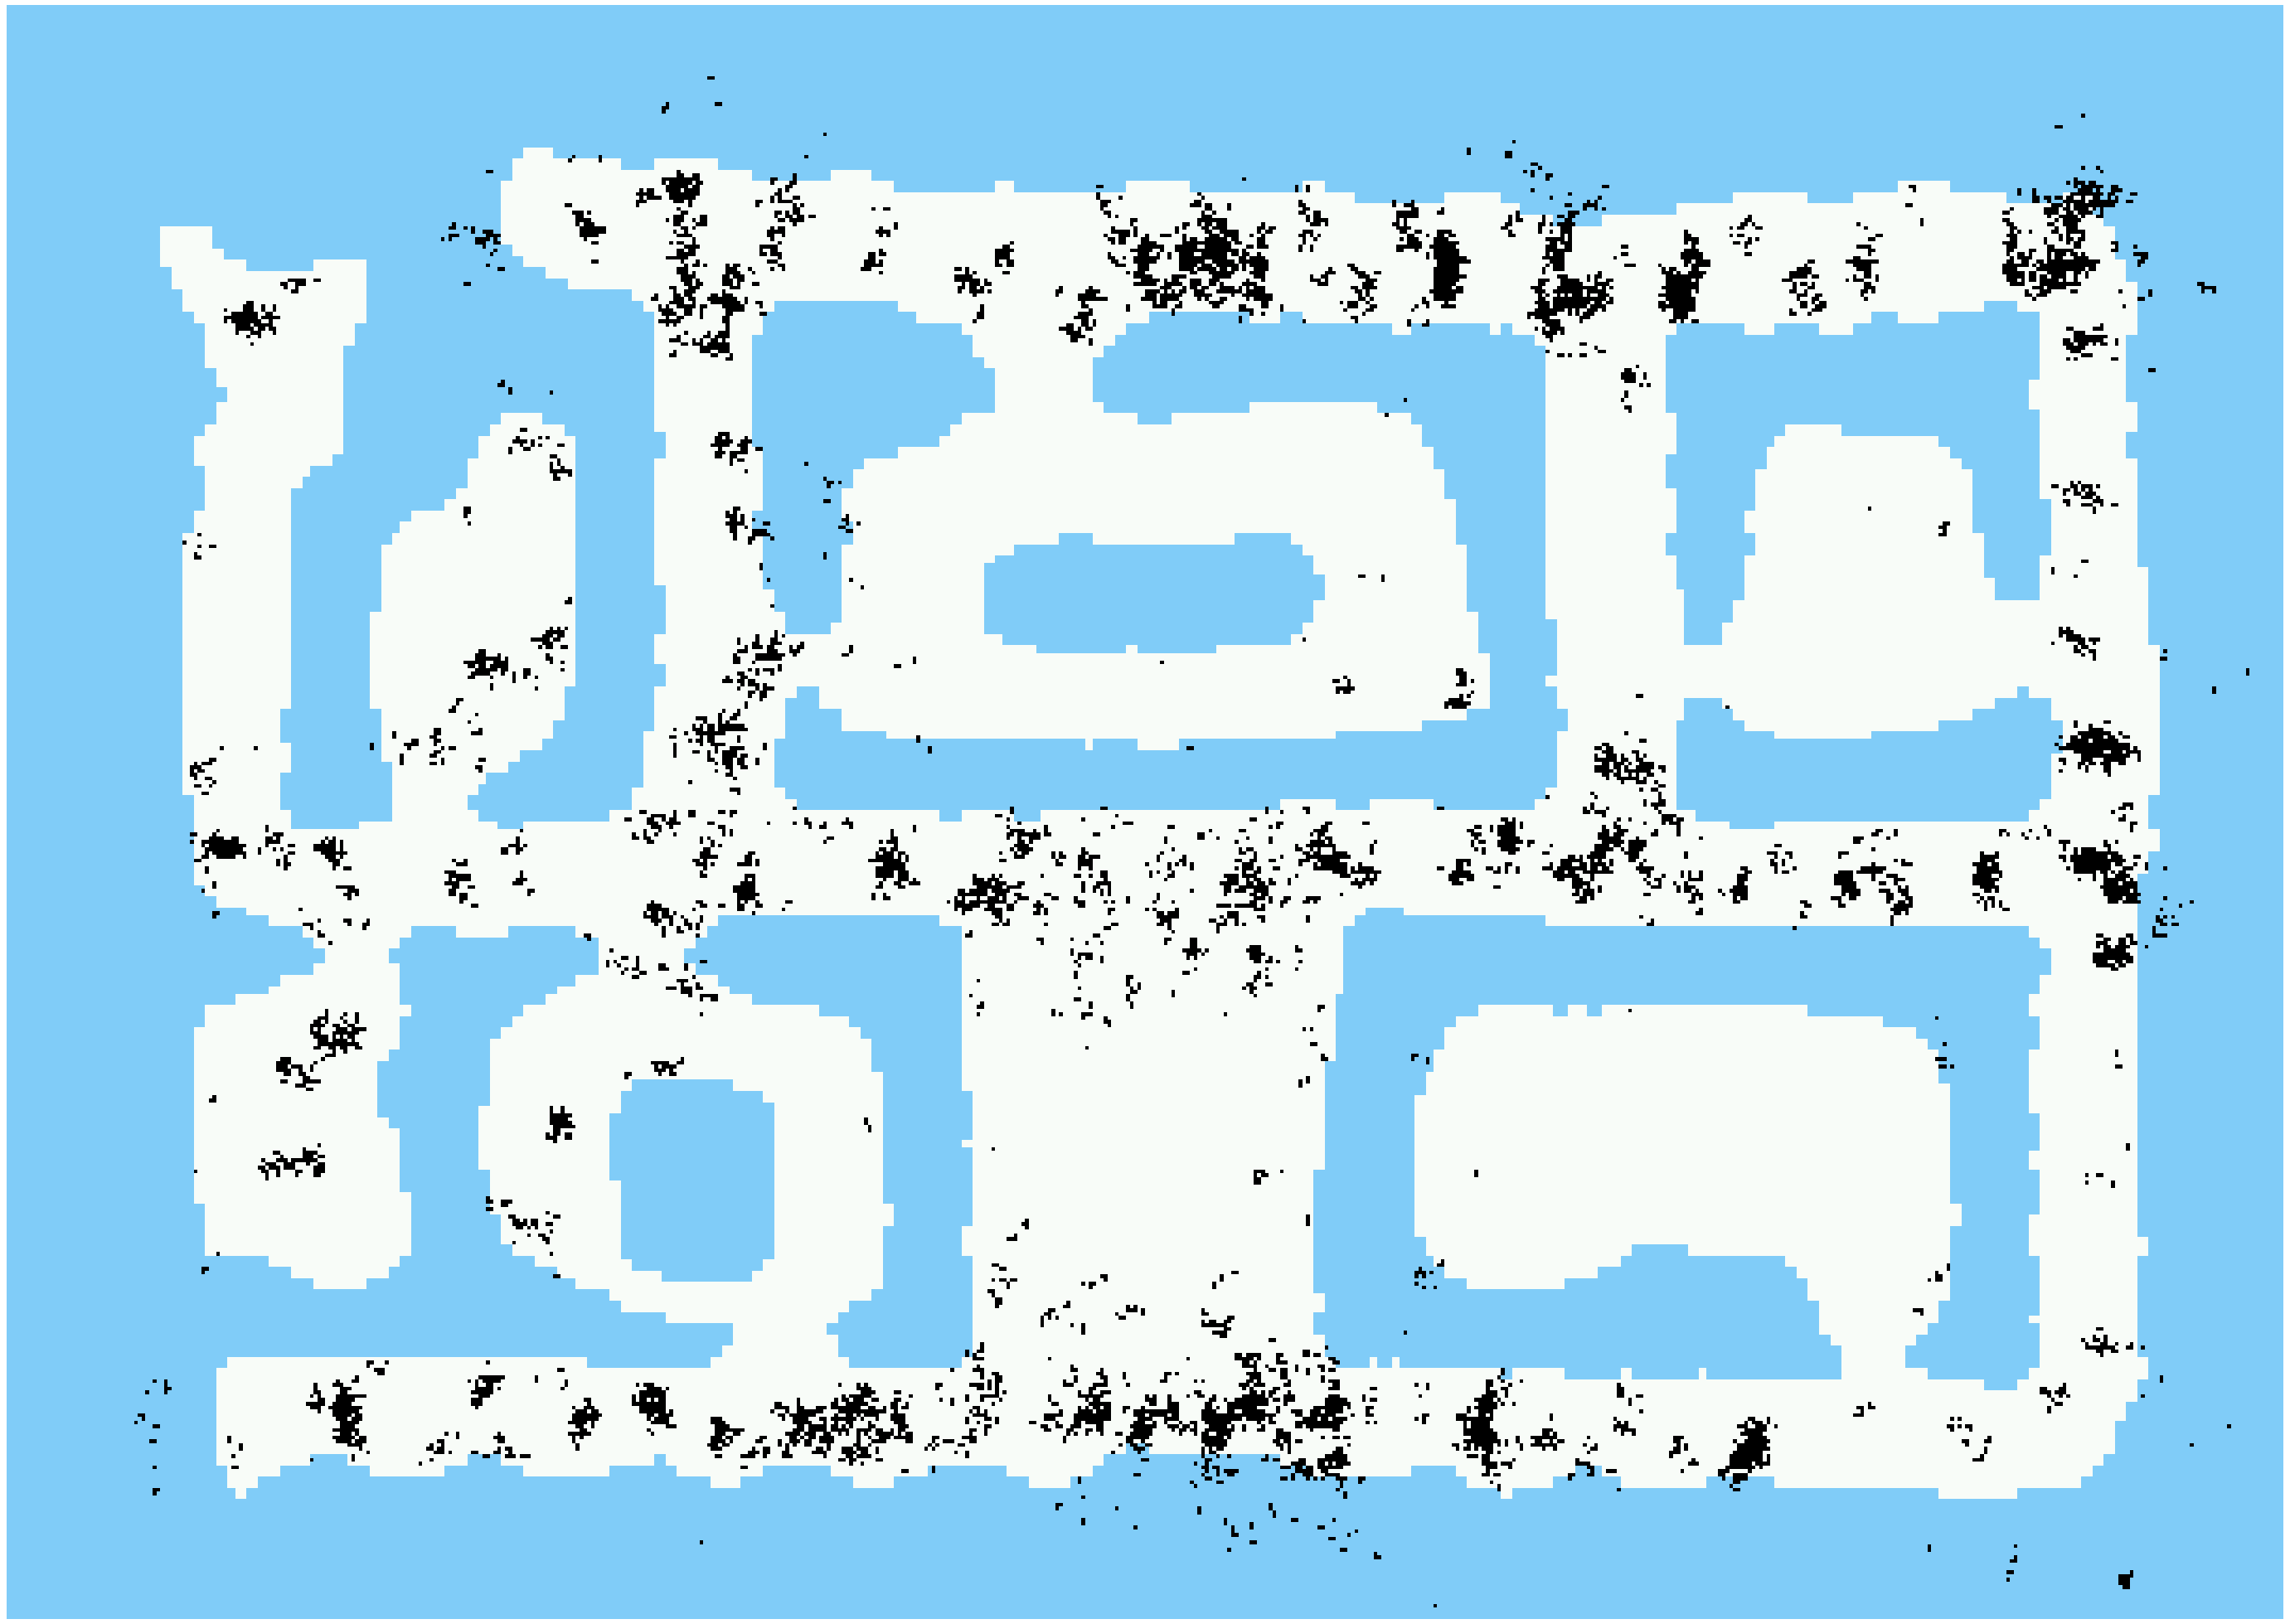

After Incorporating 65 Ultrasound Scans

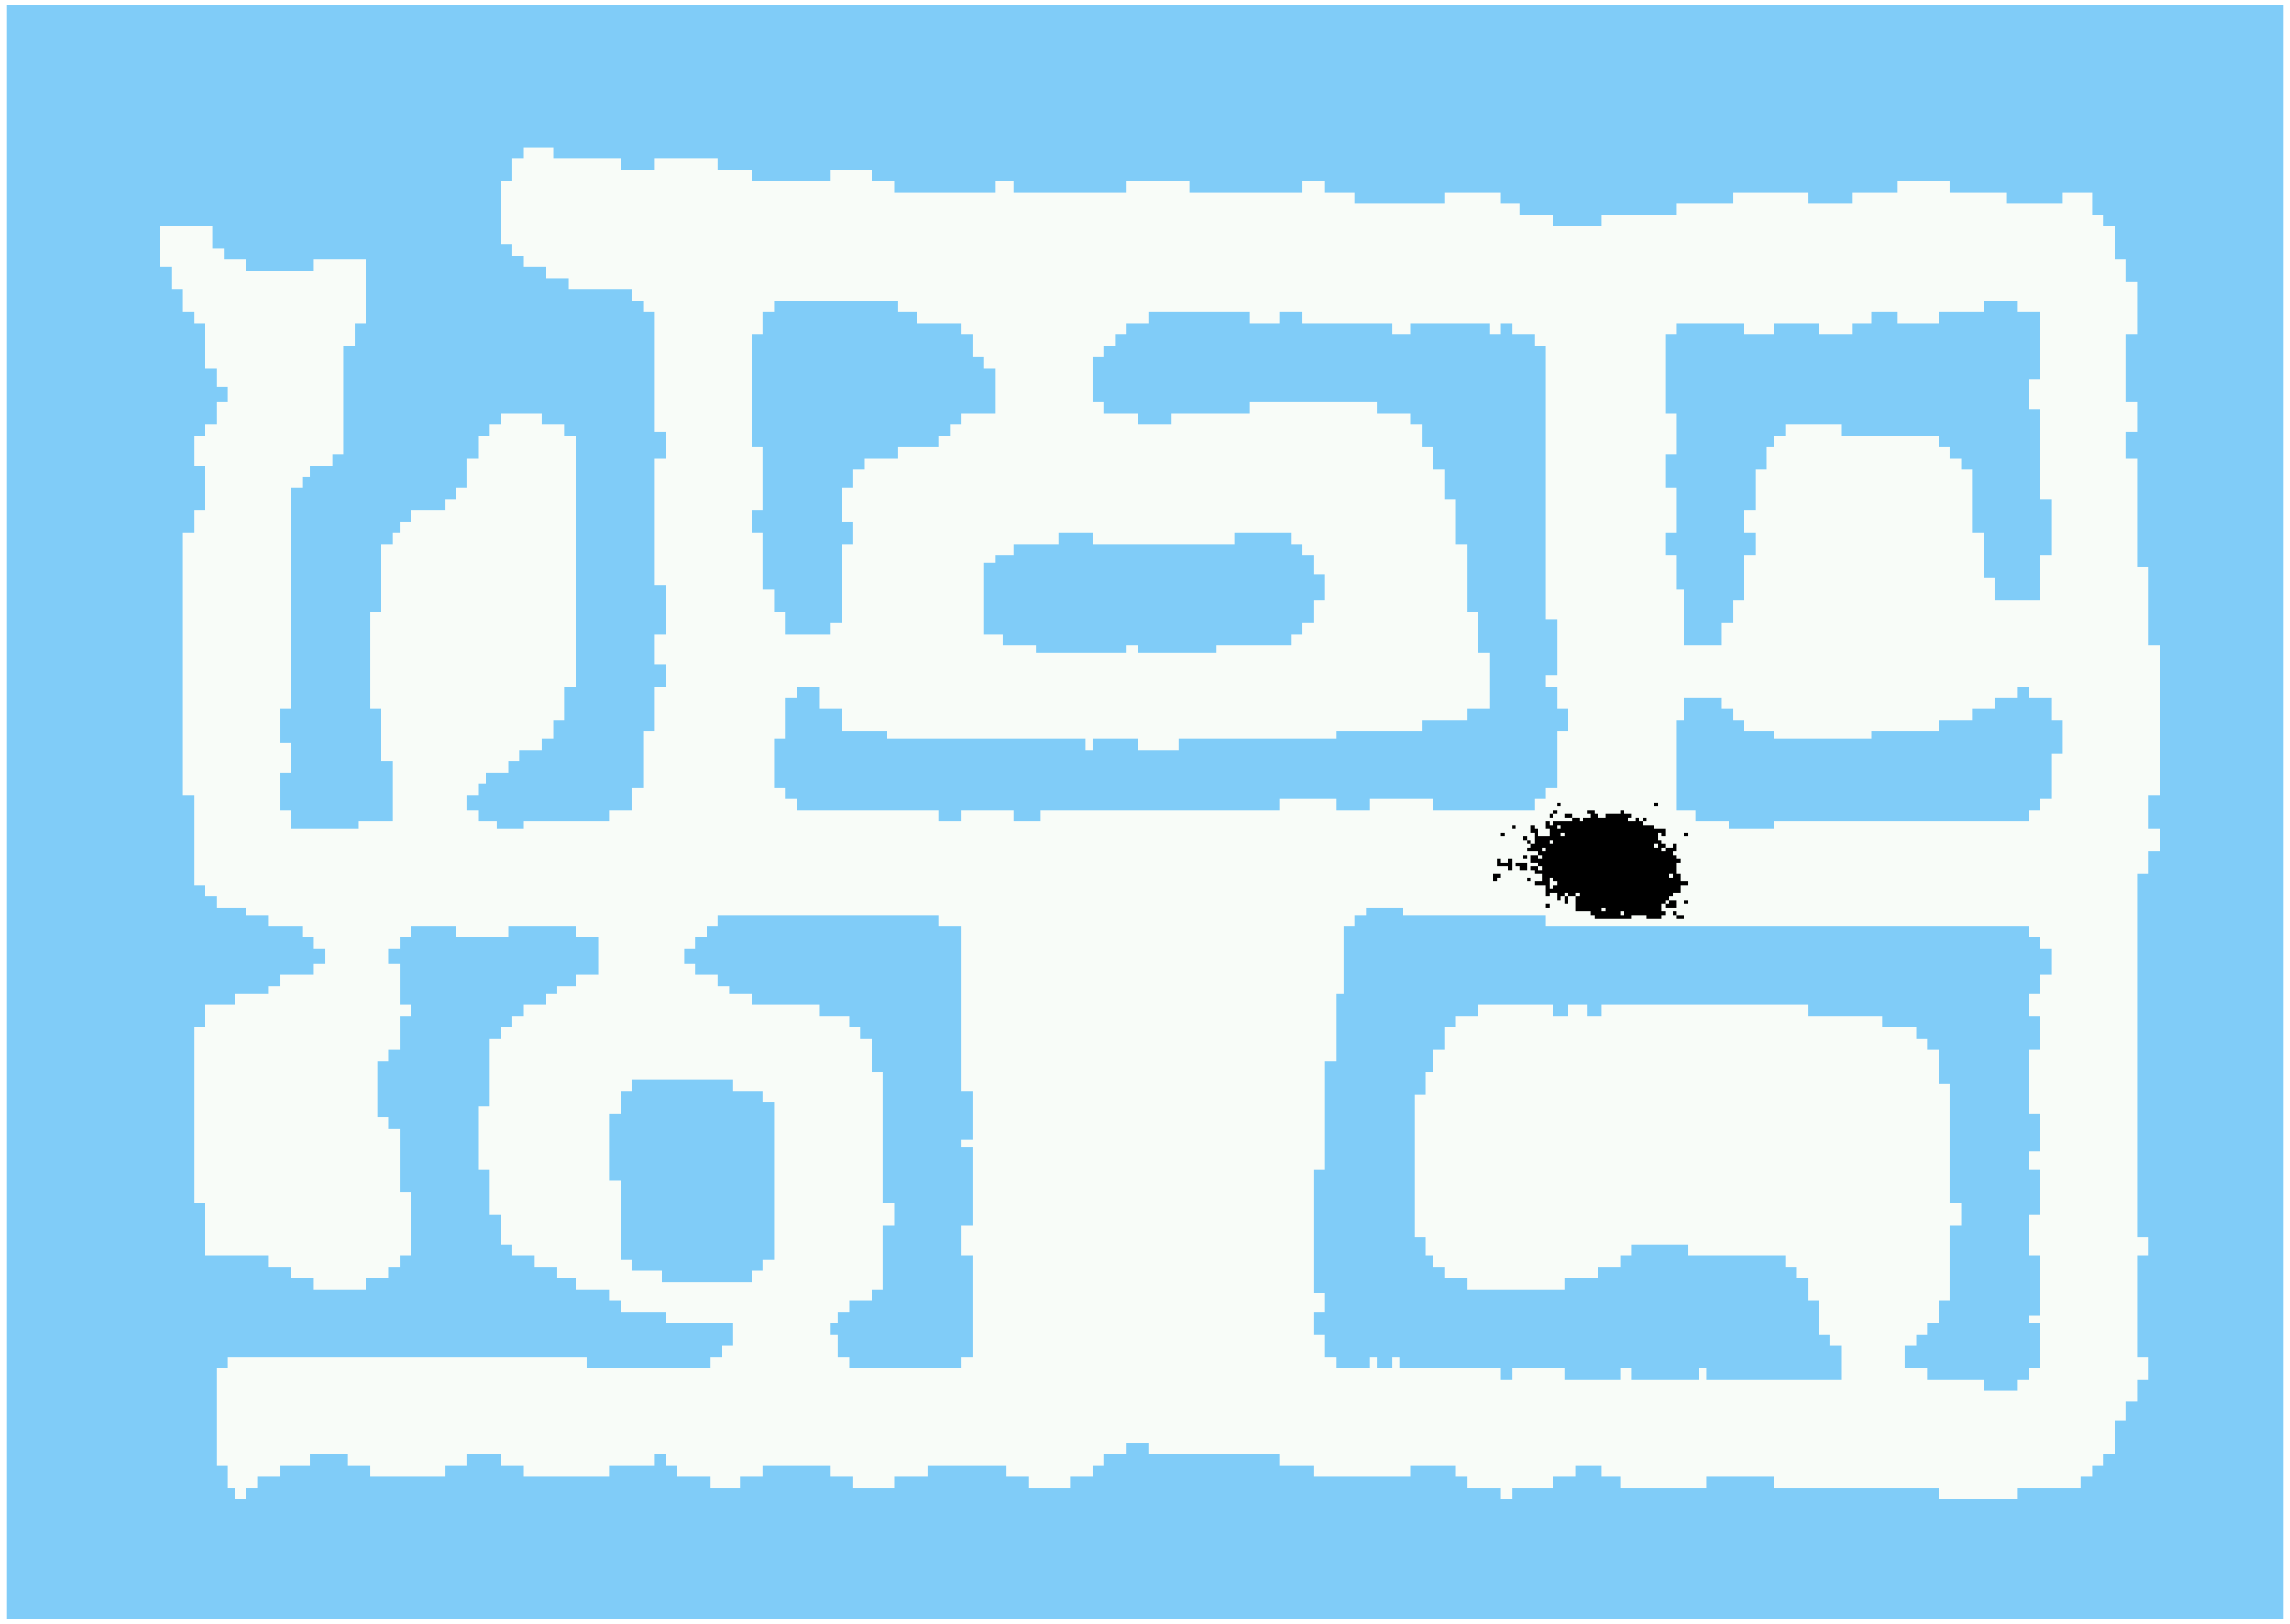

Estimated Path

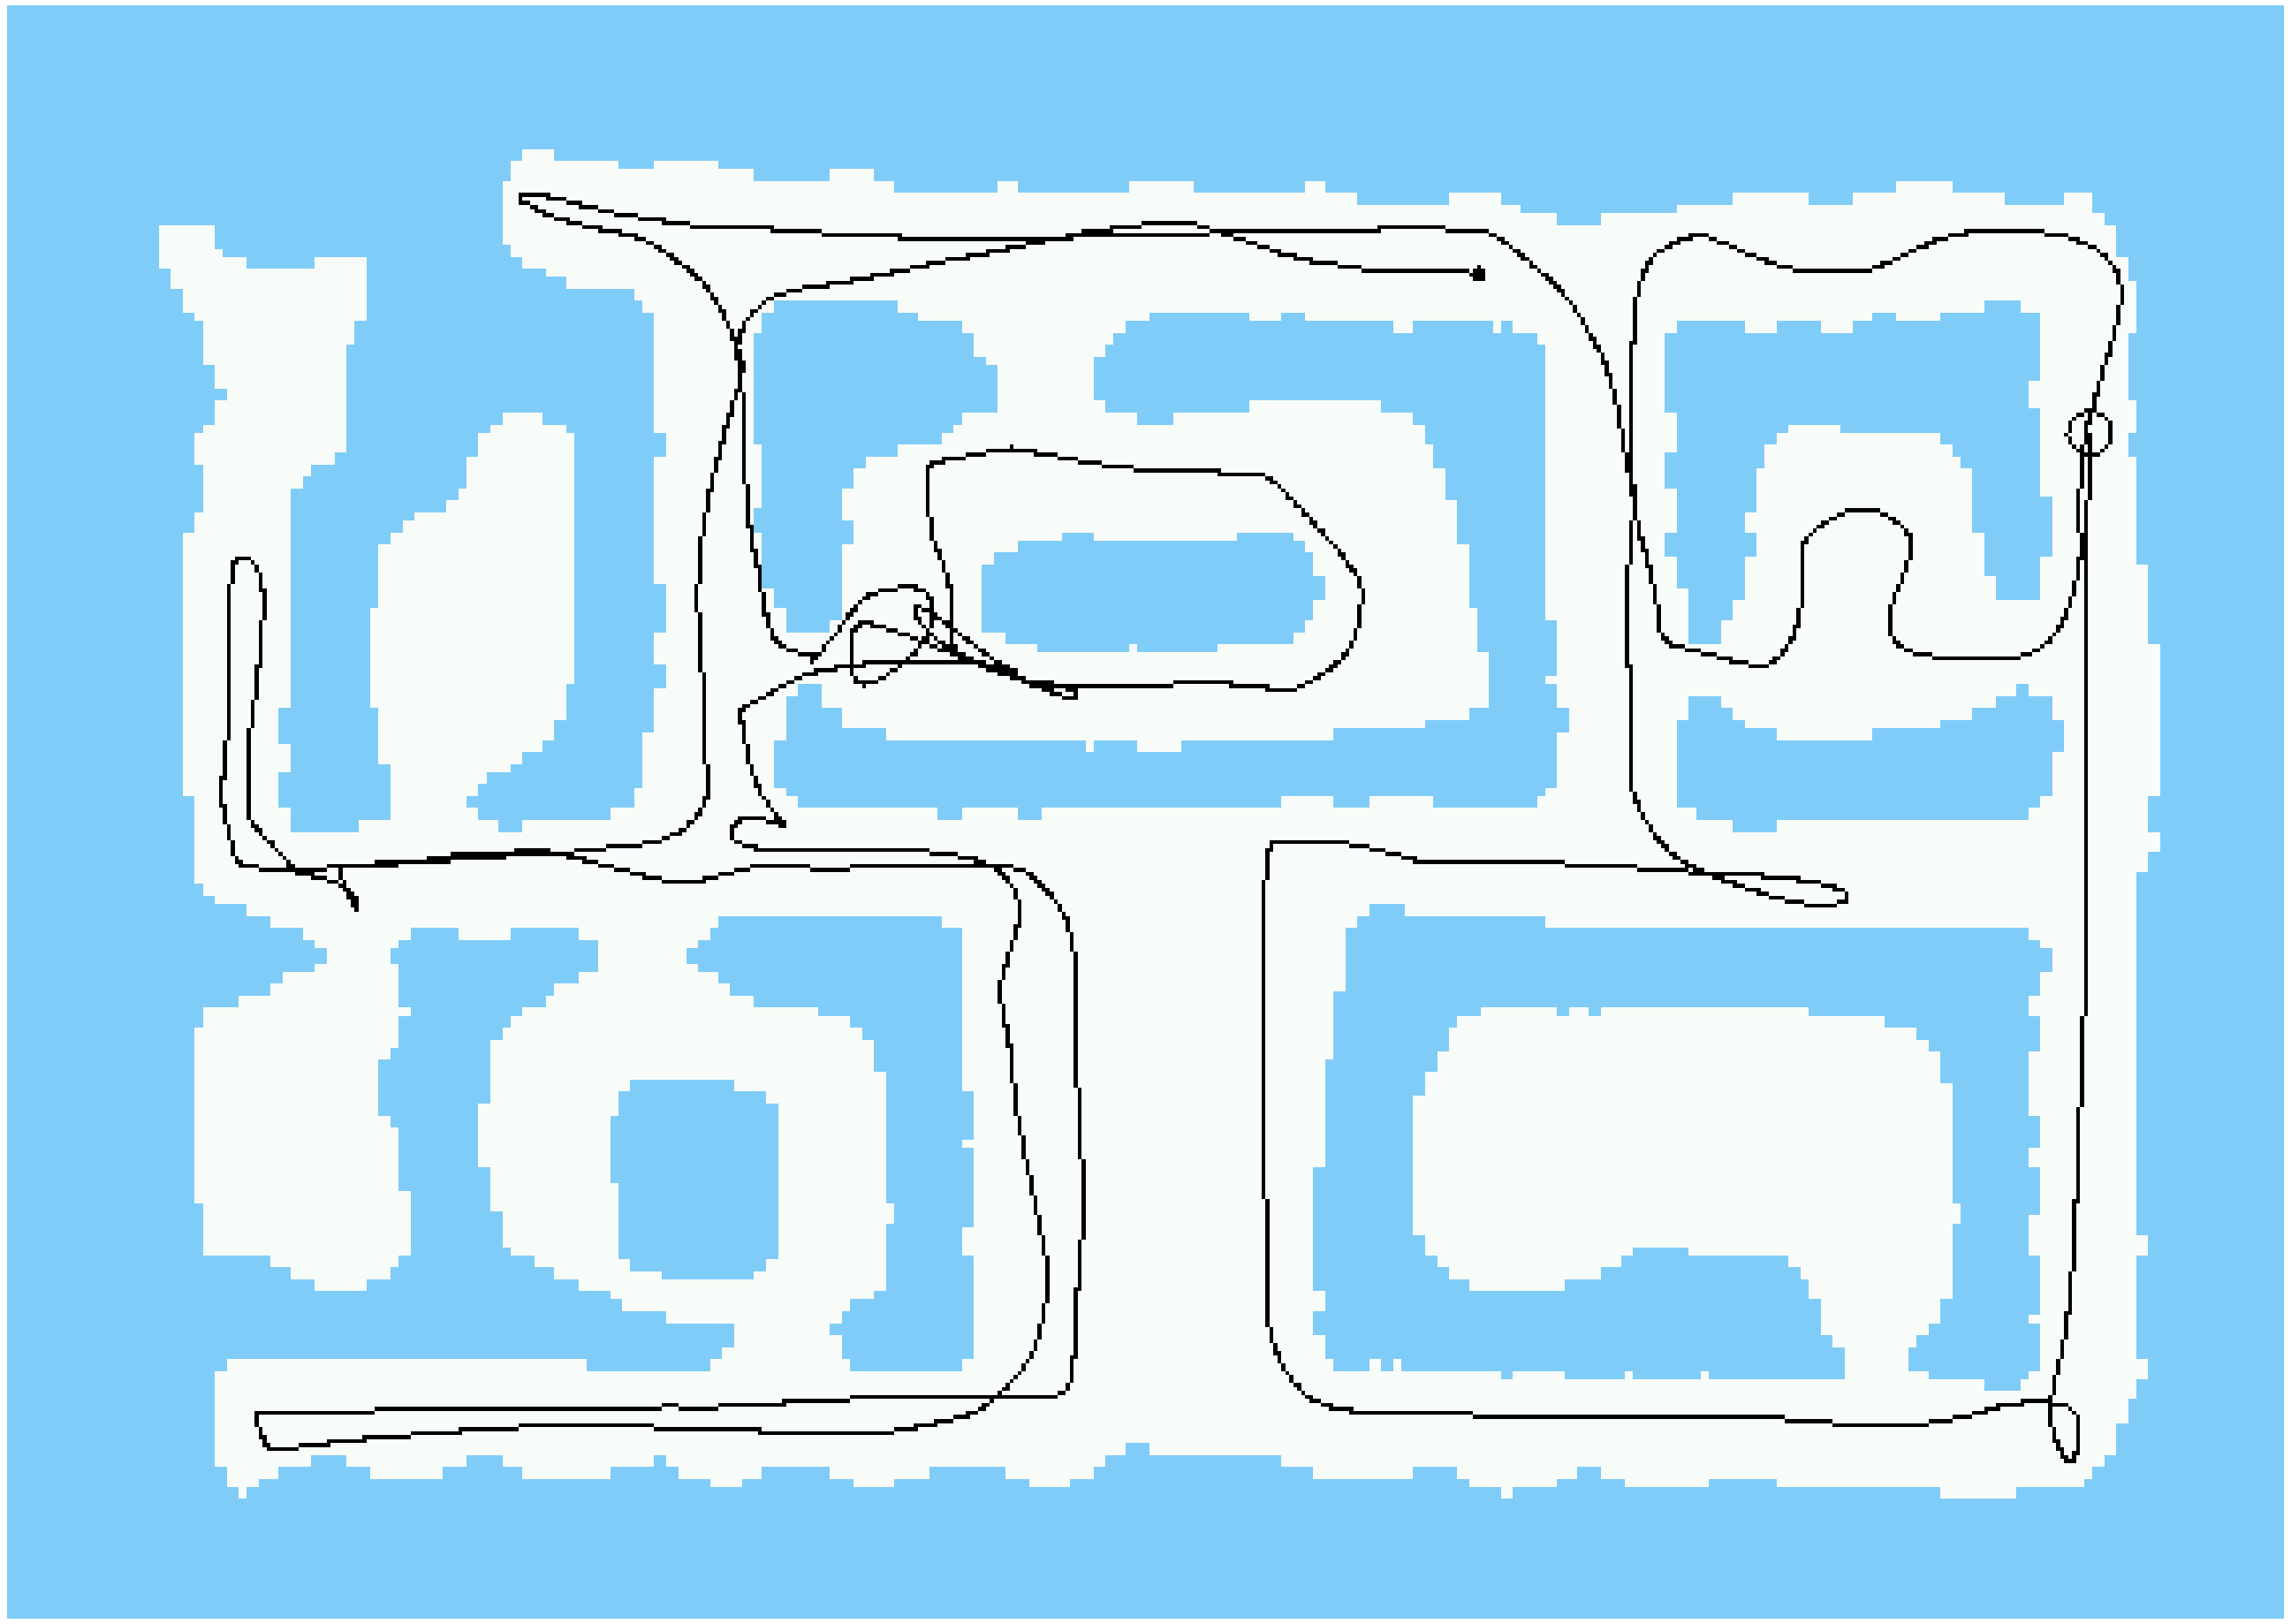

Using Ceiling Maps for Localization

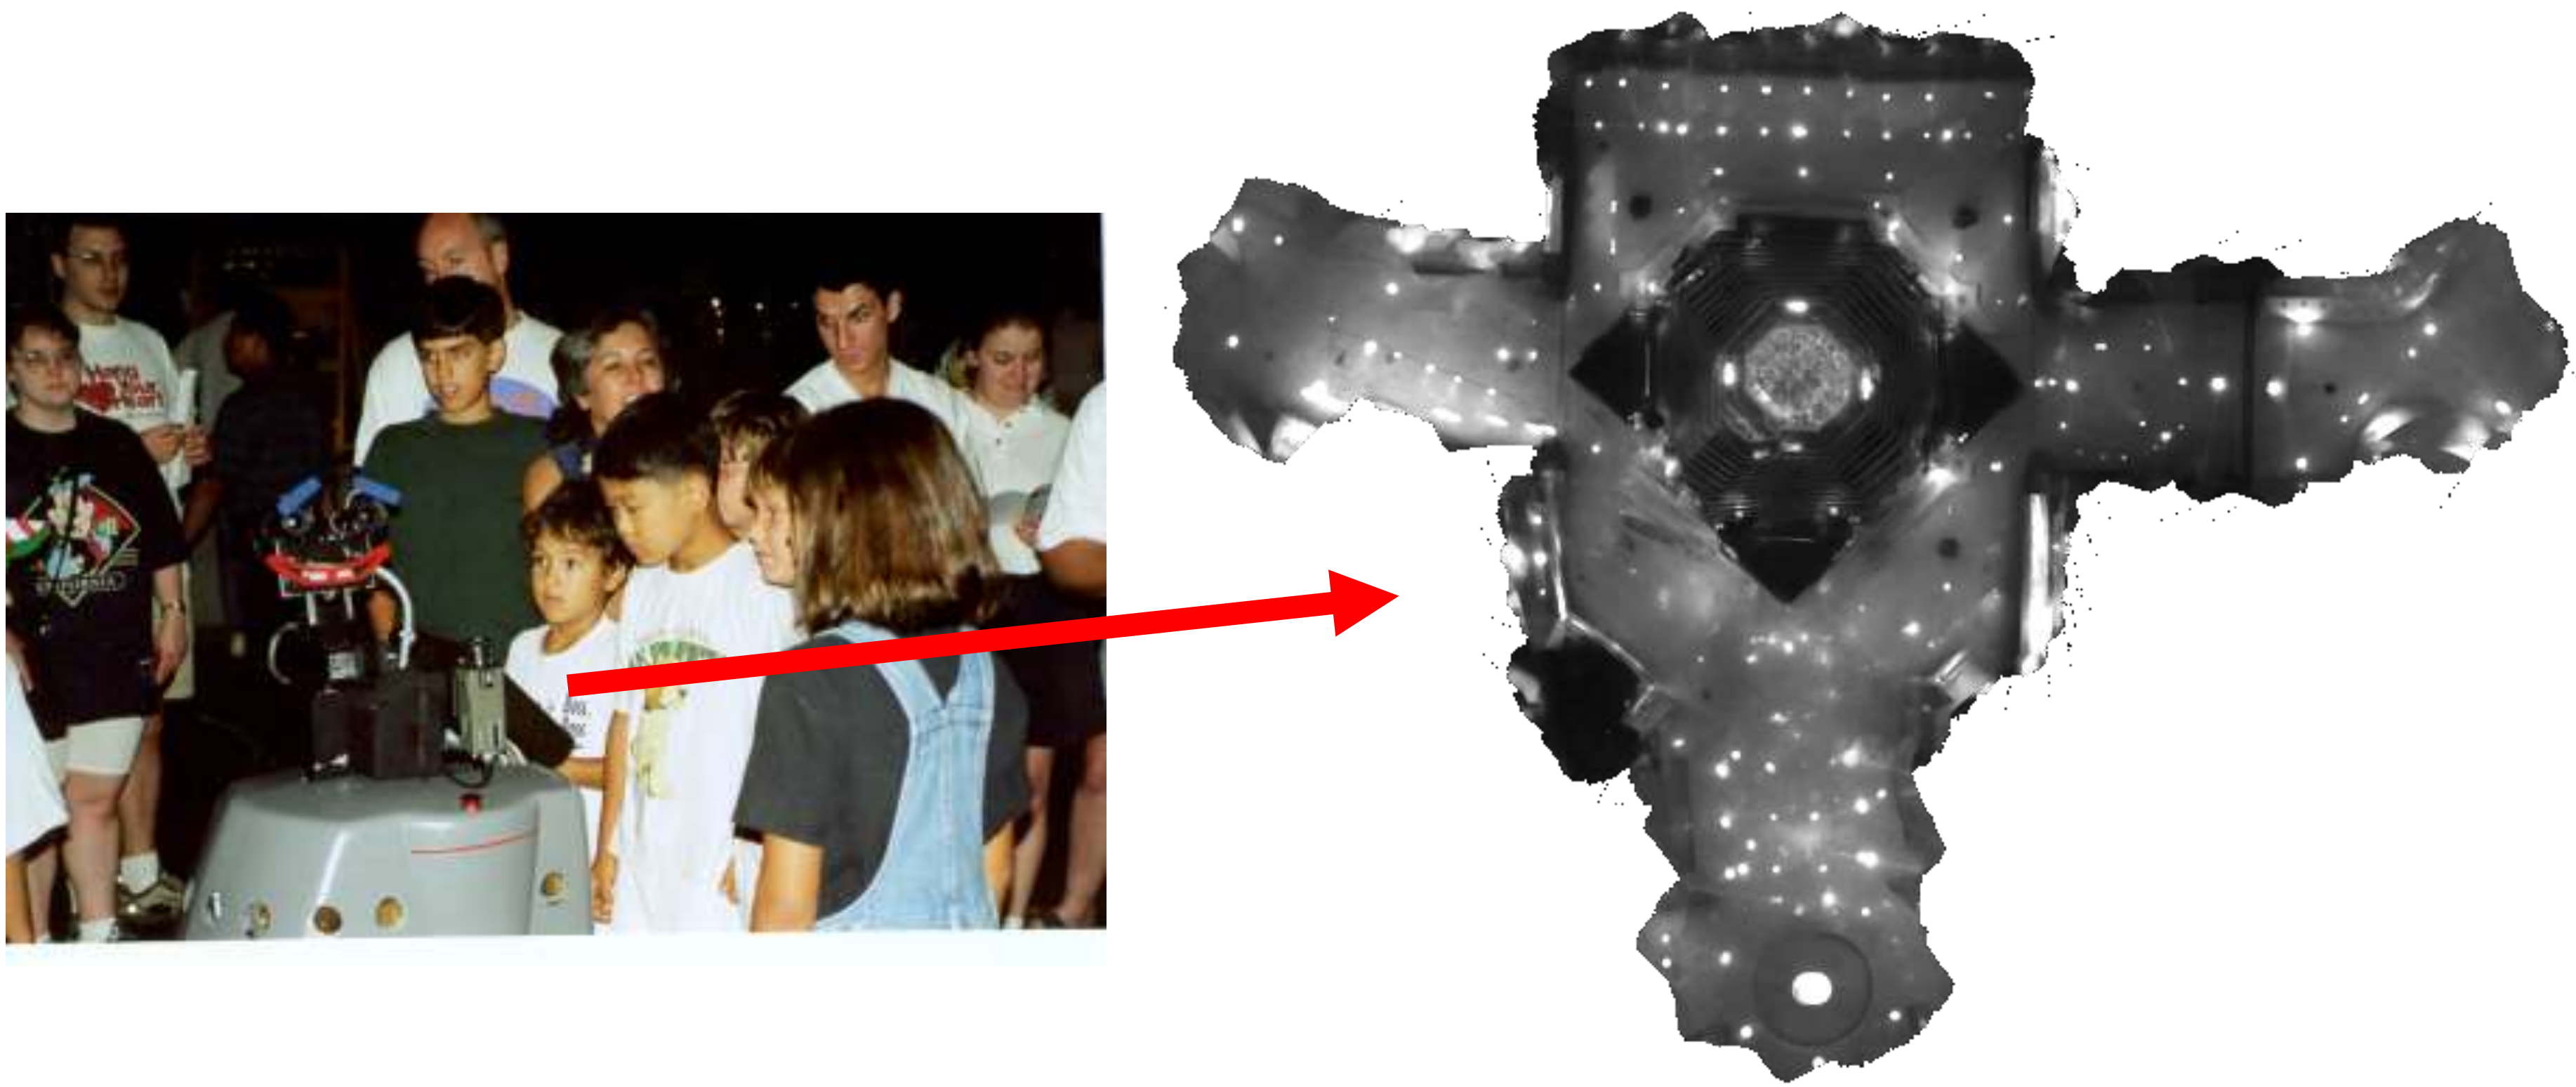

Vision-based Localization

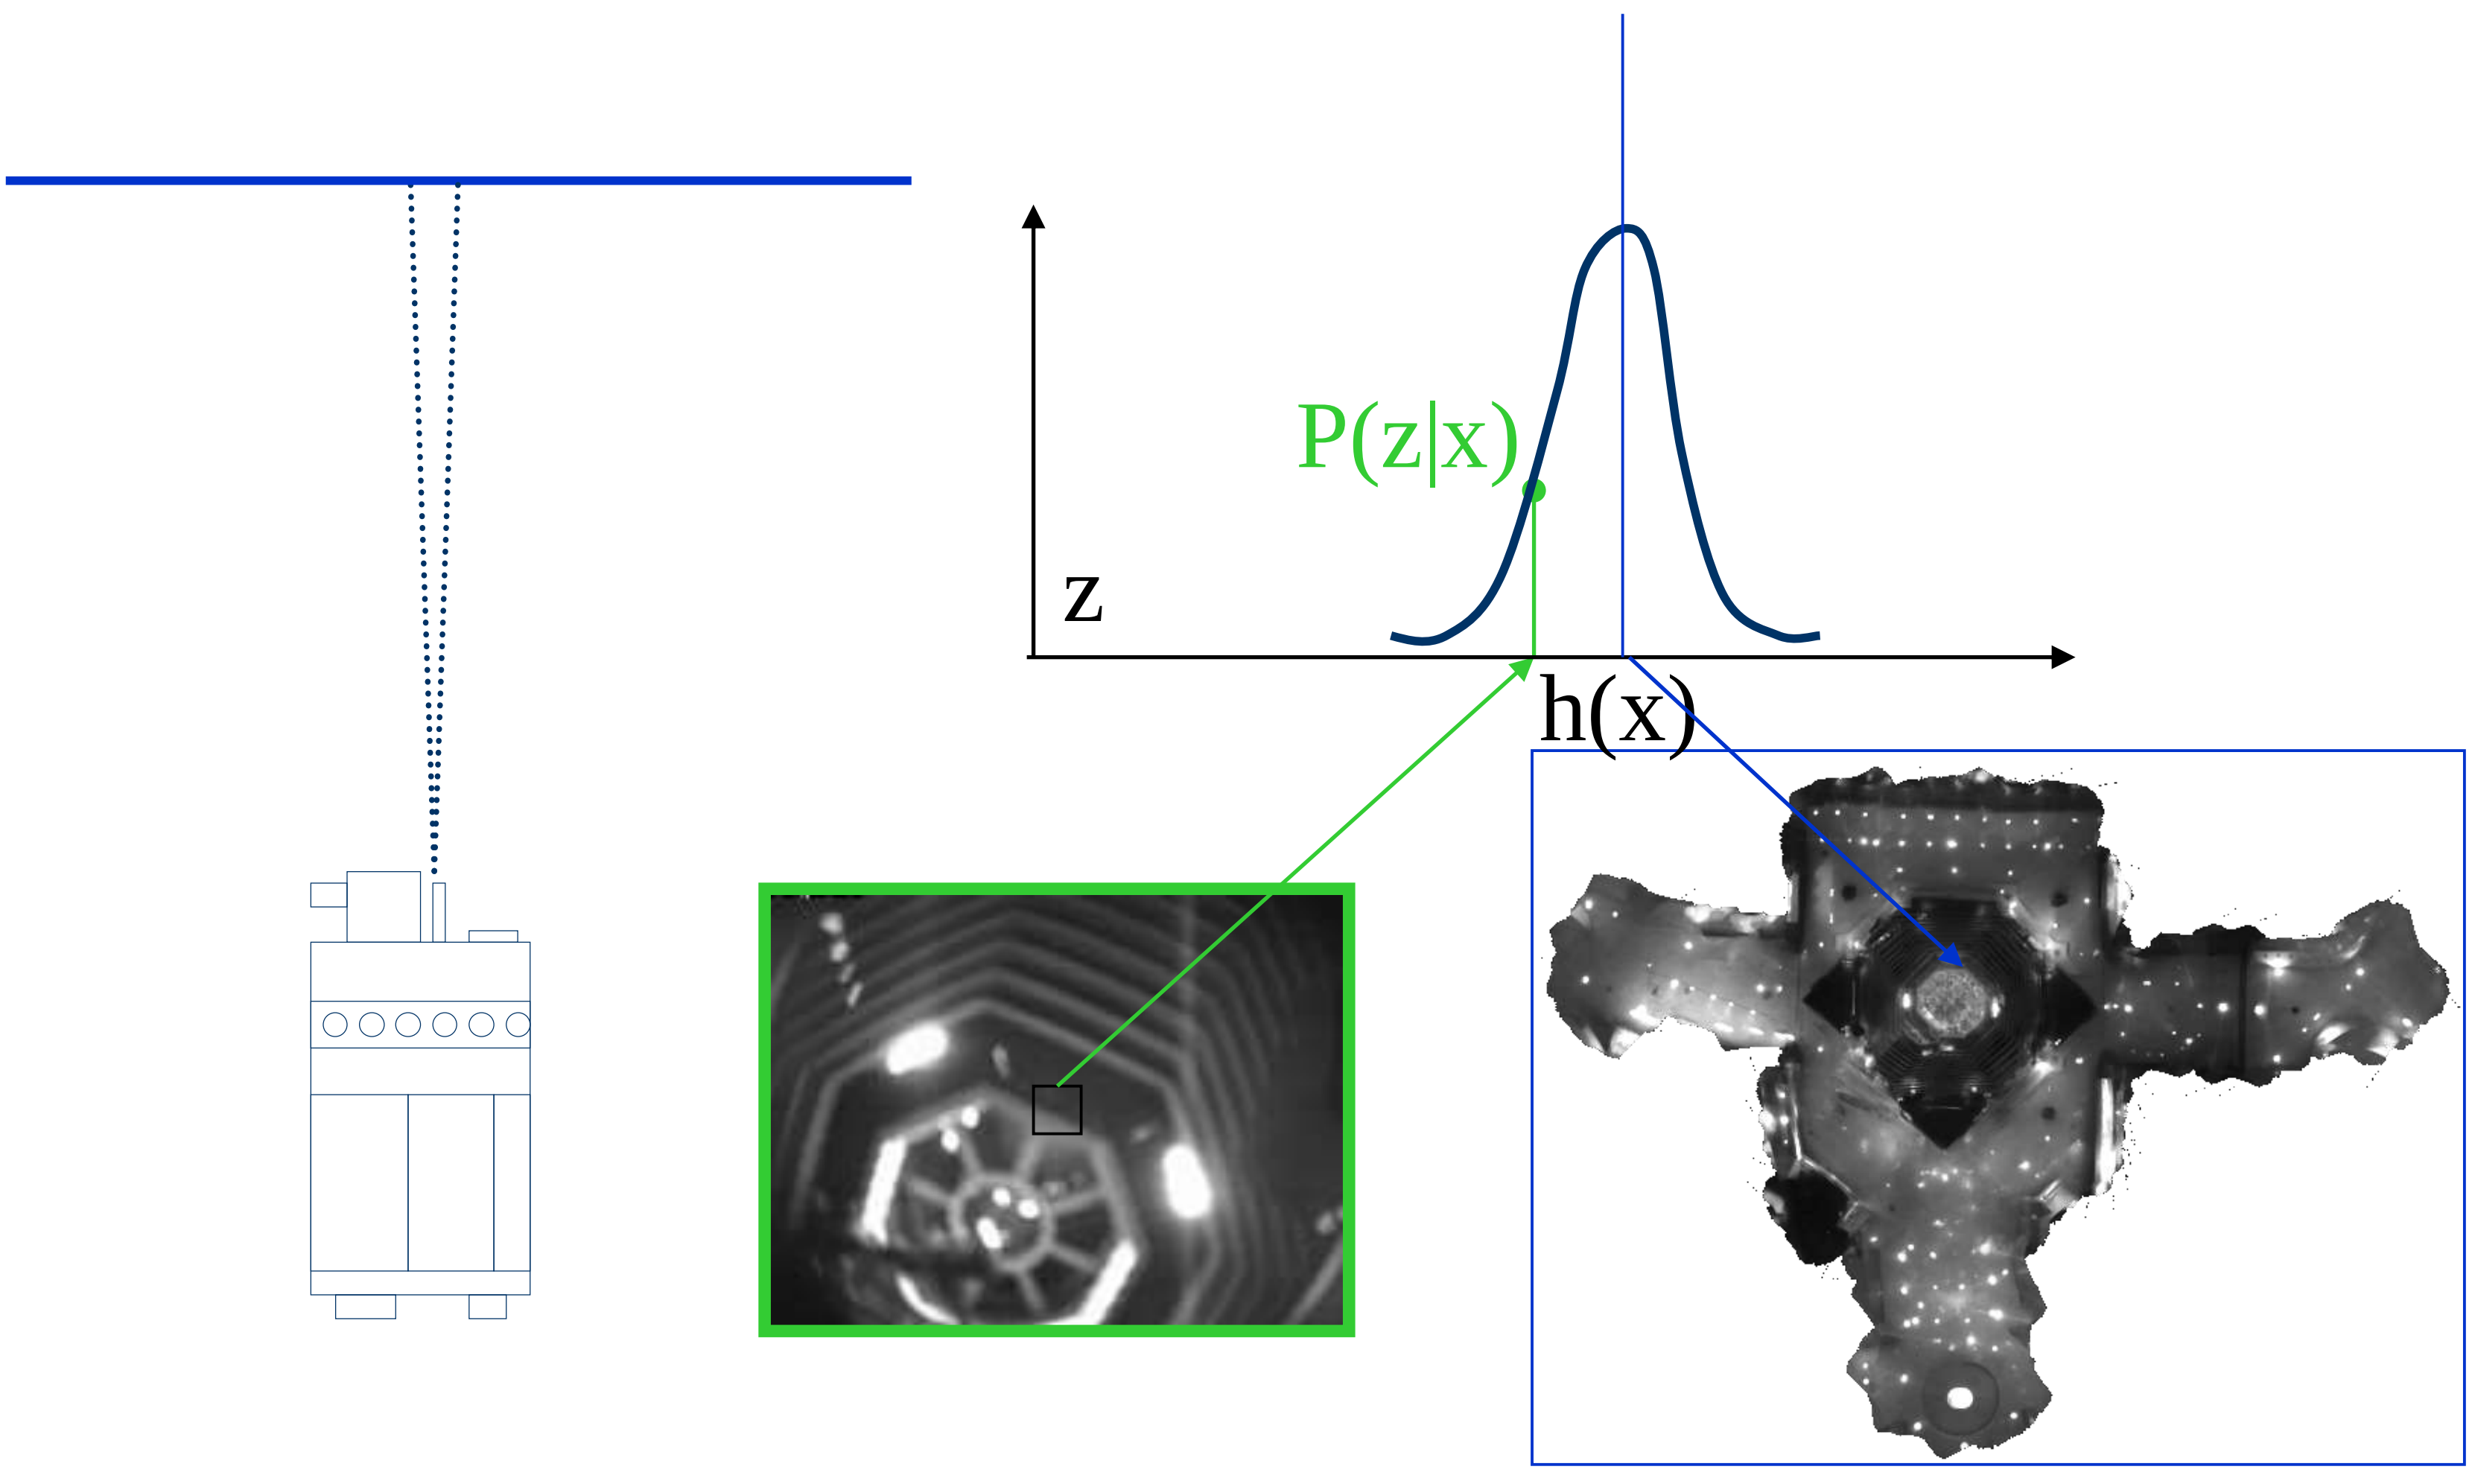

Under a Light

Measurement z:



***P(z|x)*:**

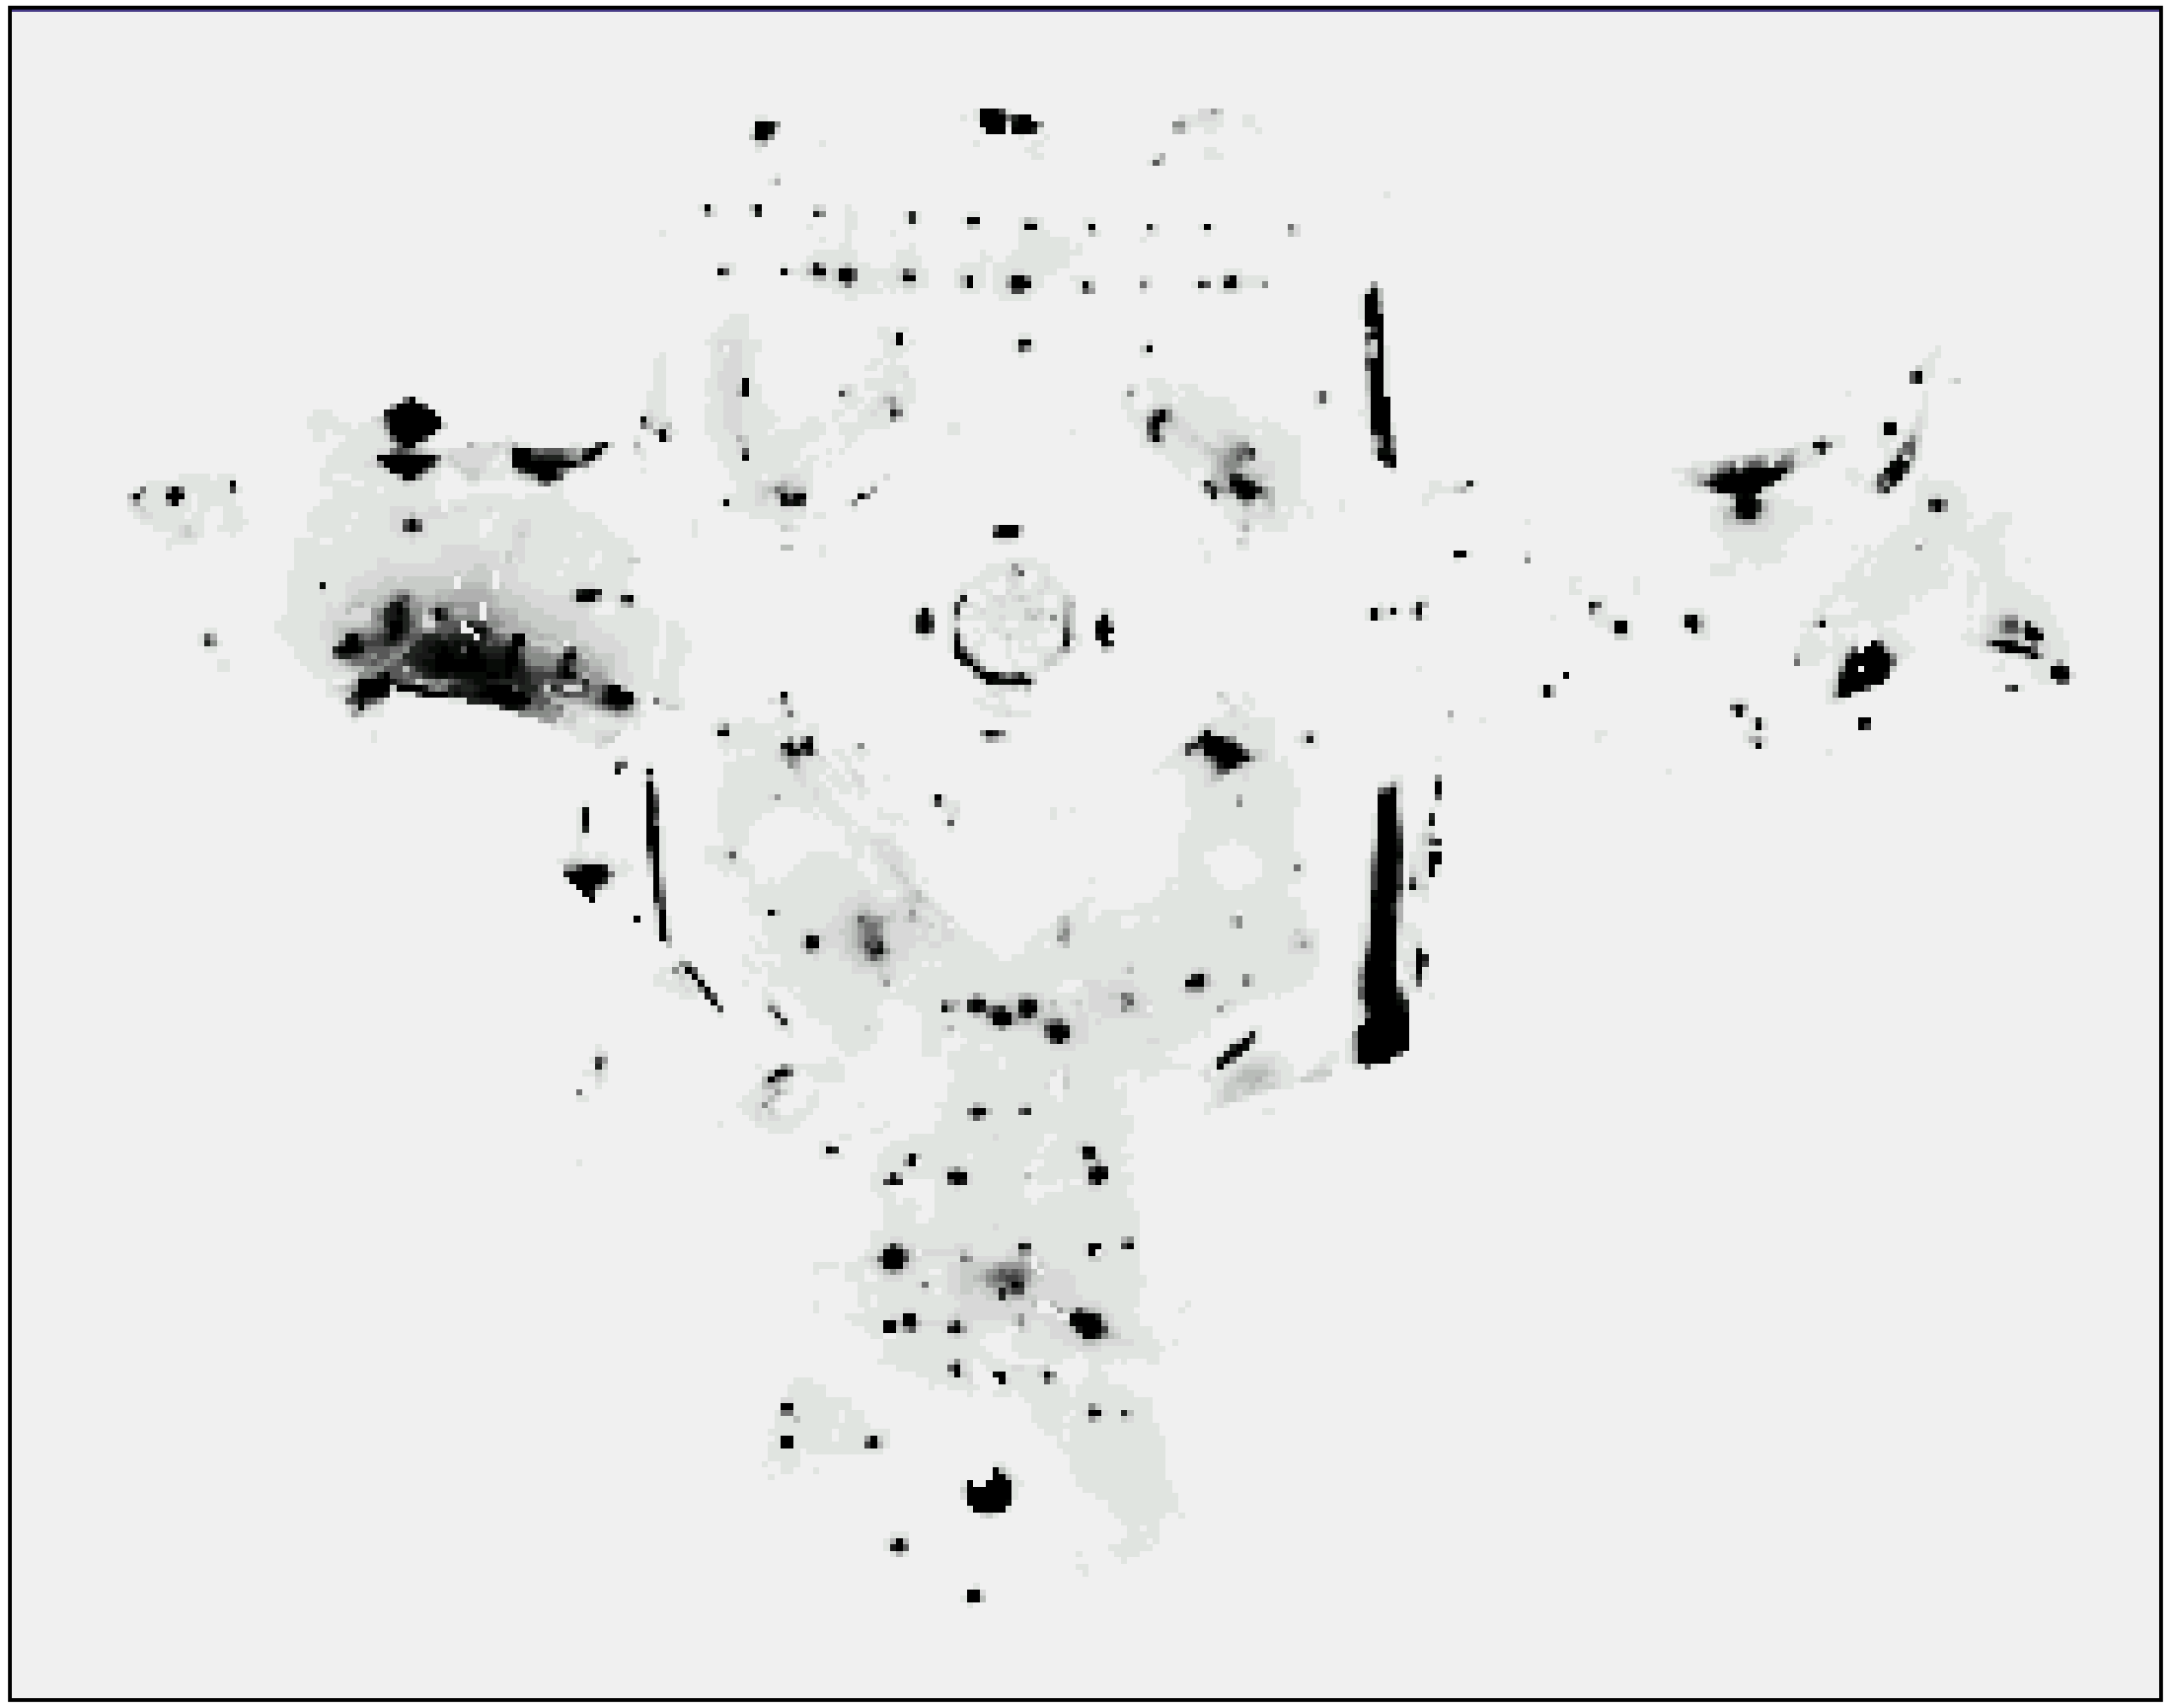

Next to a Light

Measurement z:



***P(z|x)*:**

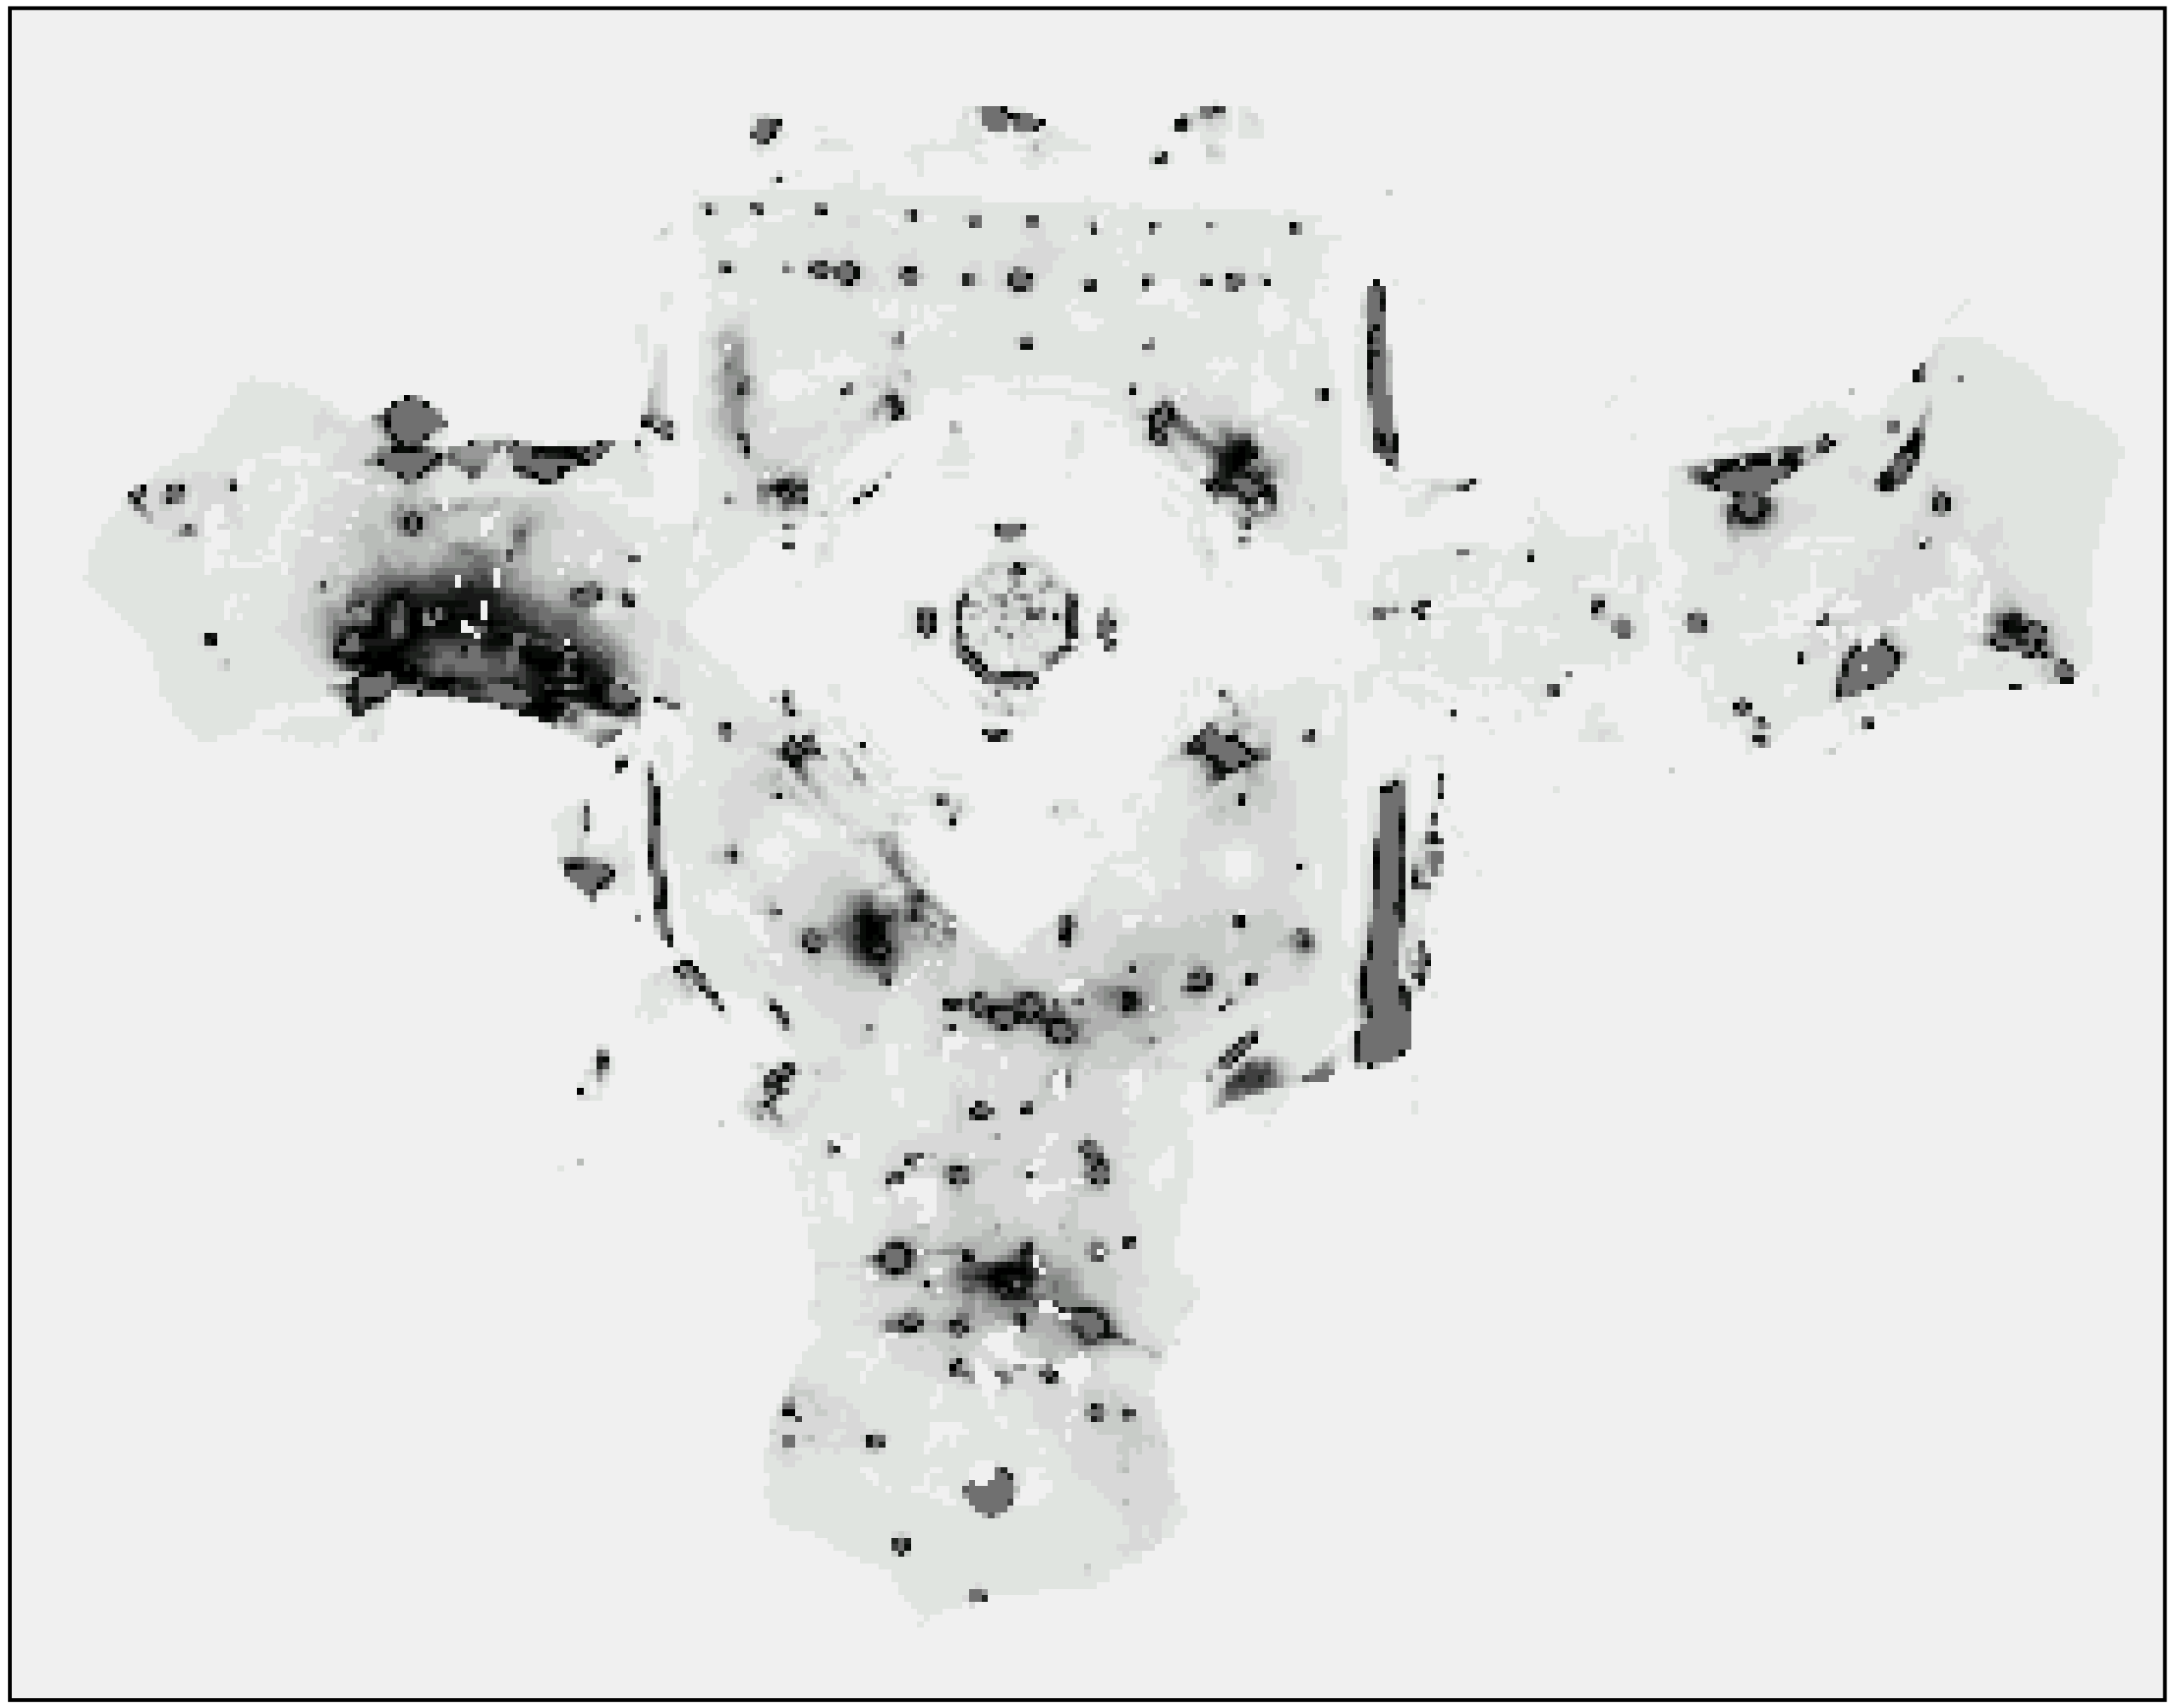

Elsewhere

Measurement z:

***P(z|x)*:**

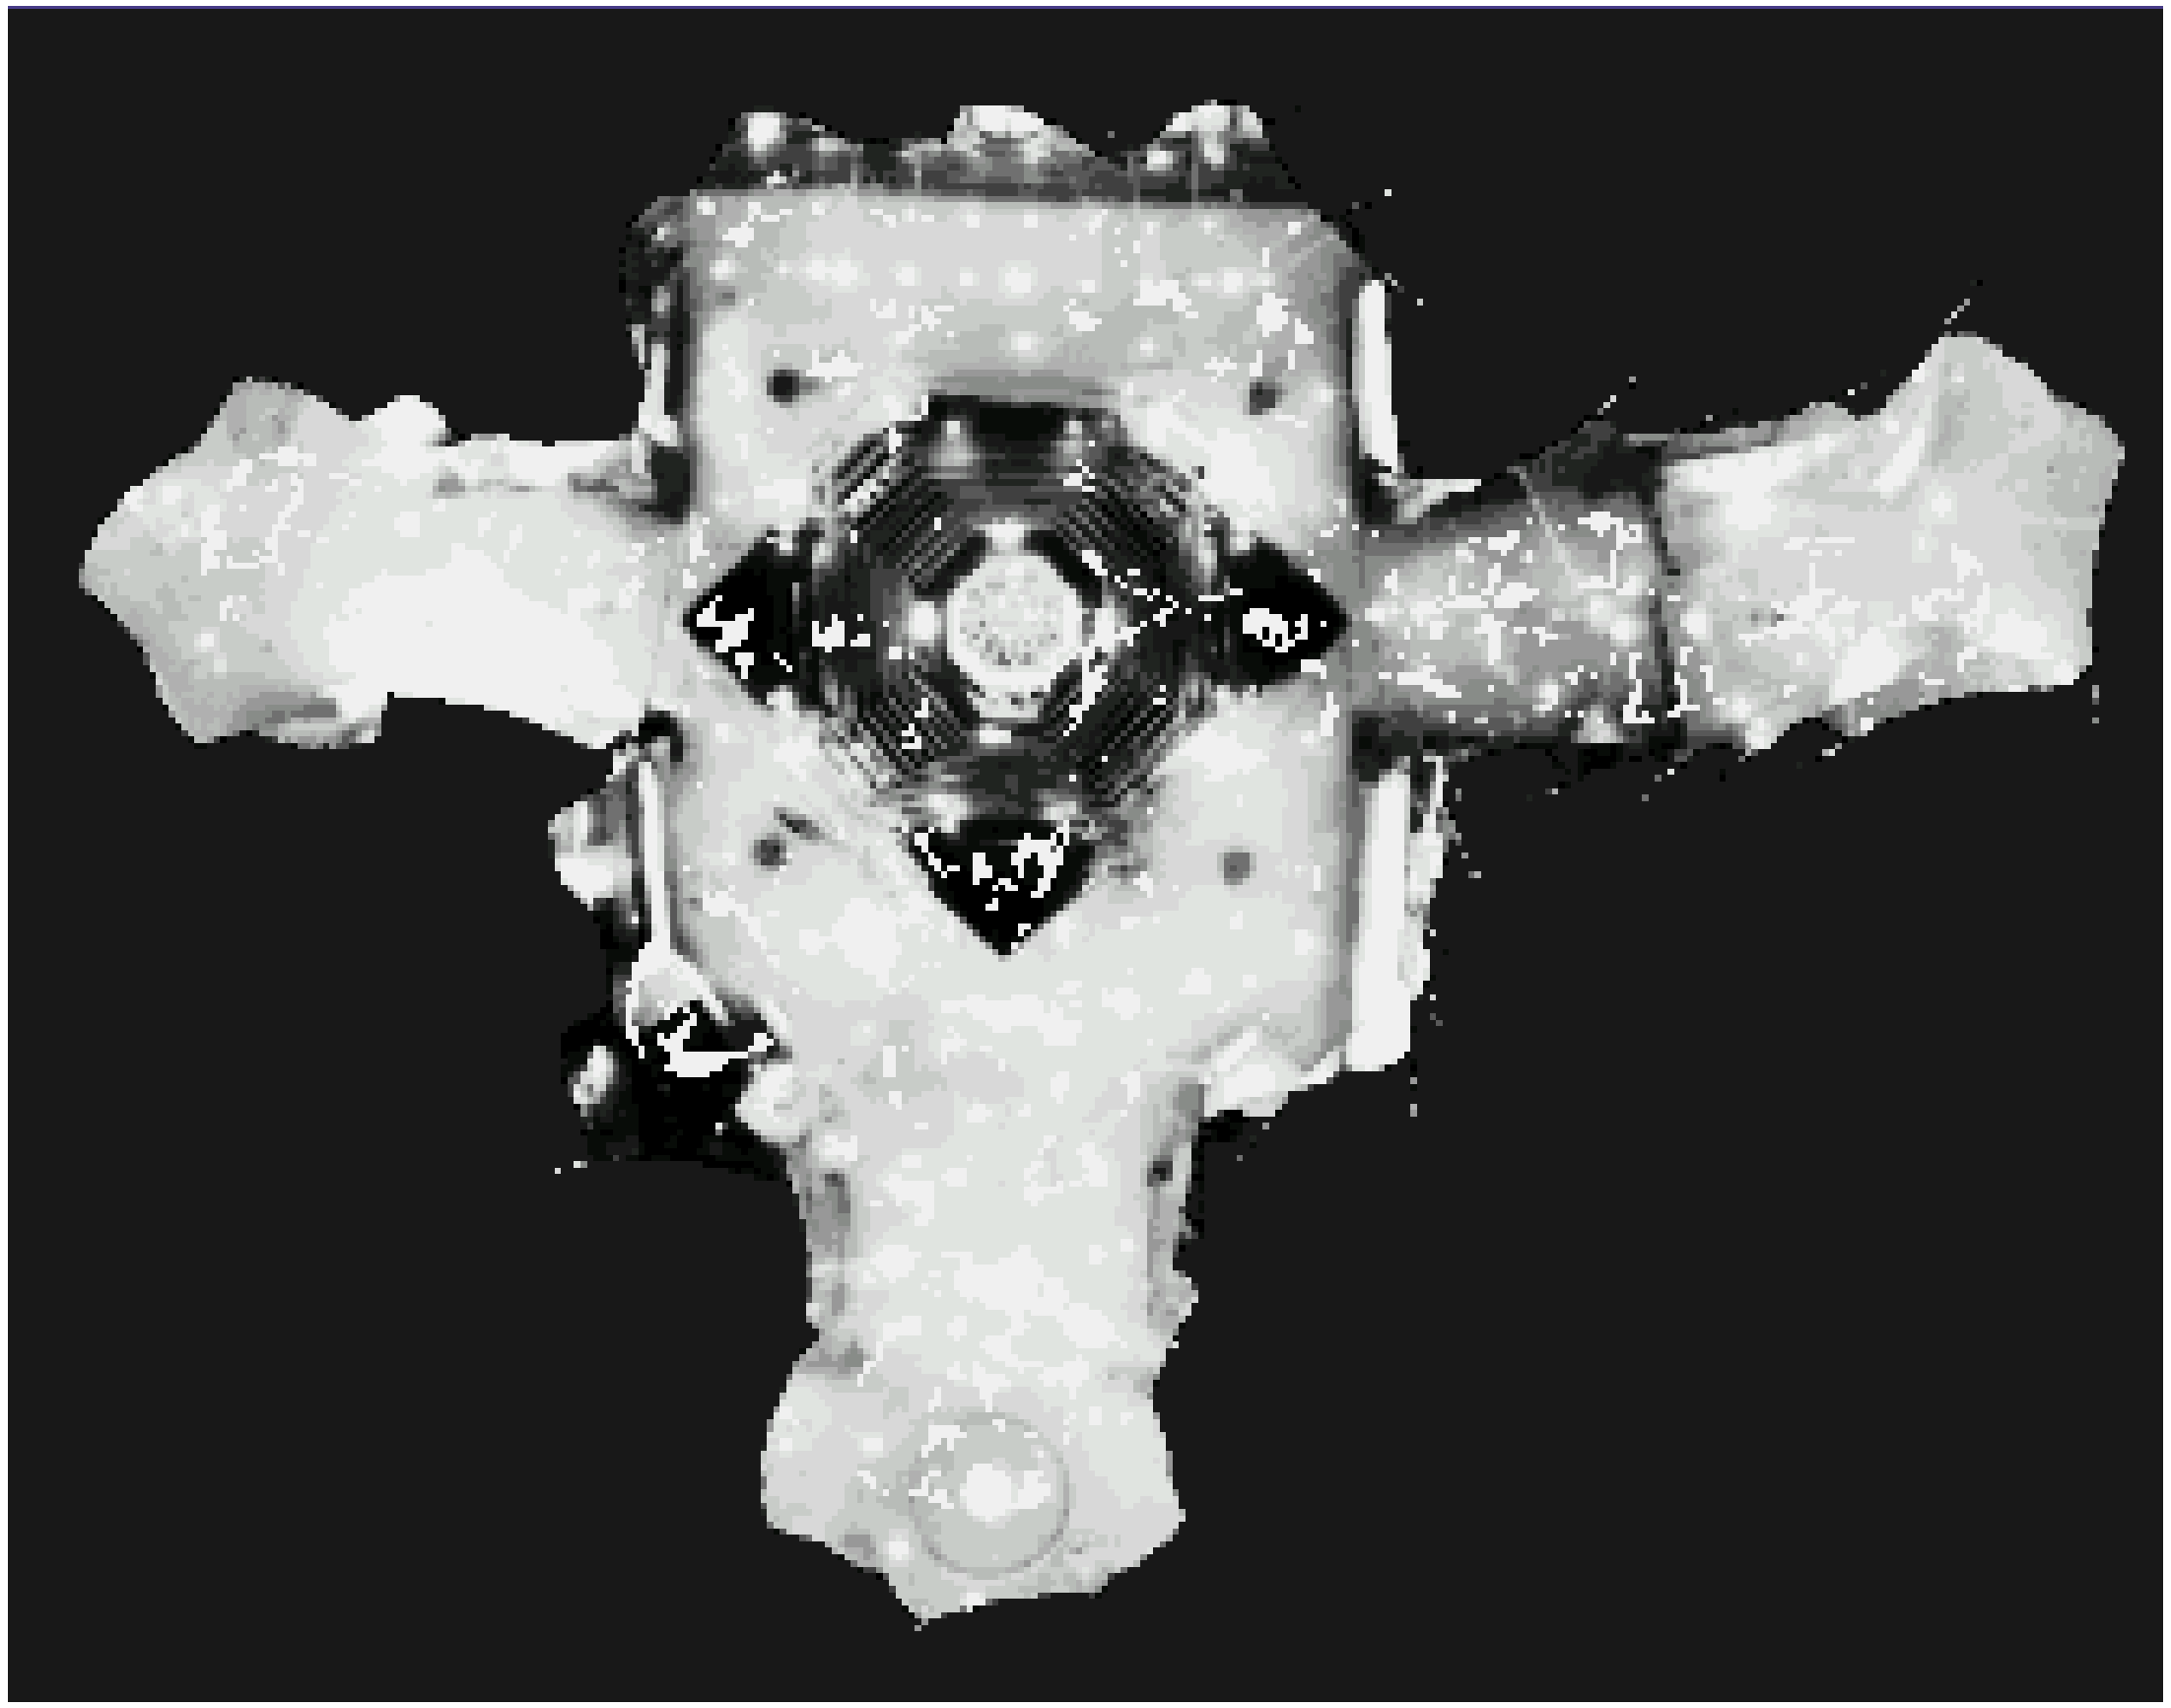

Global Localization Using Vision

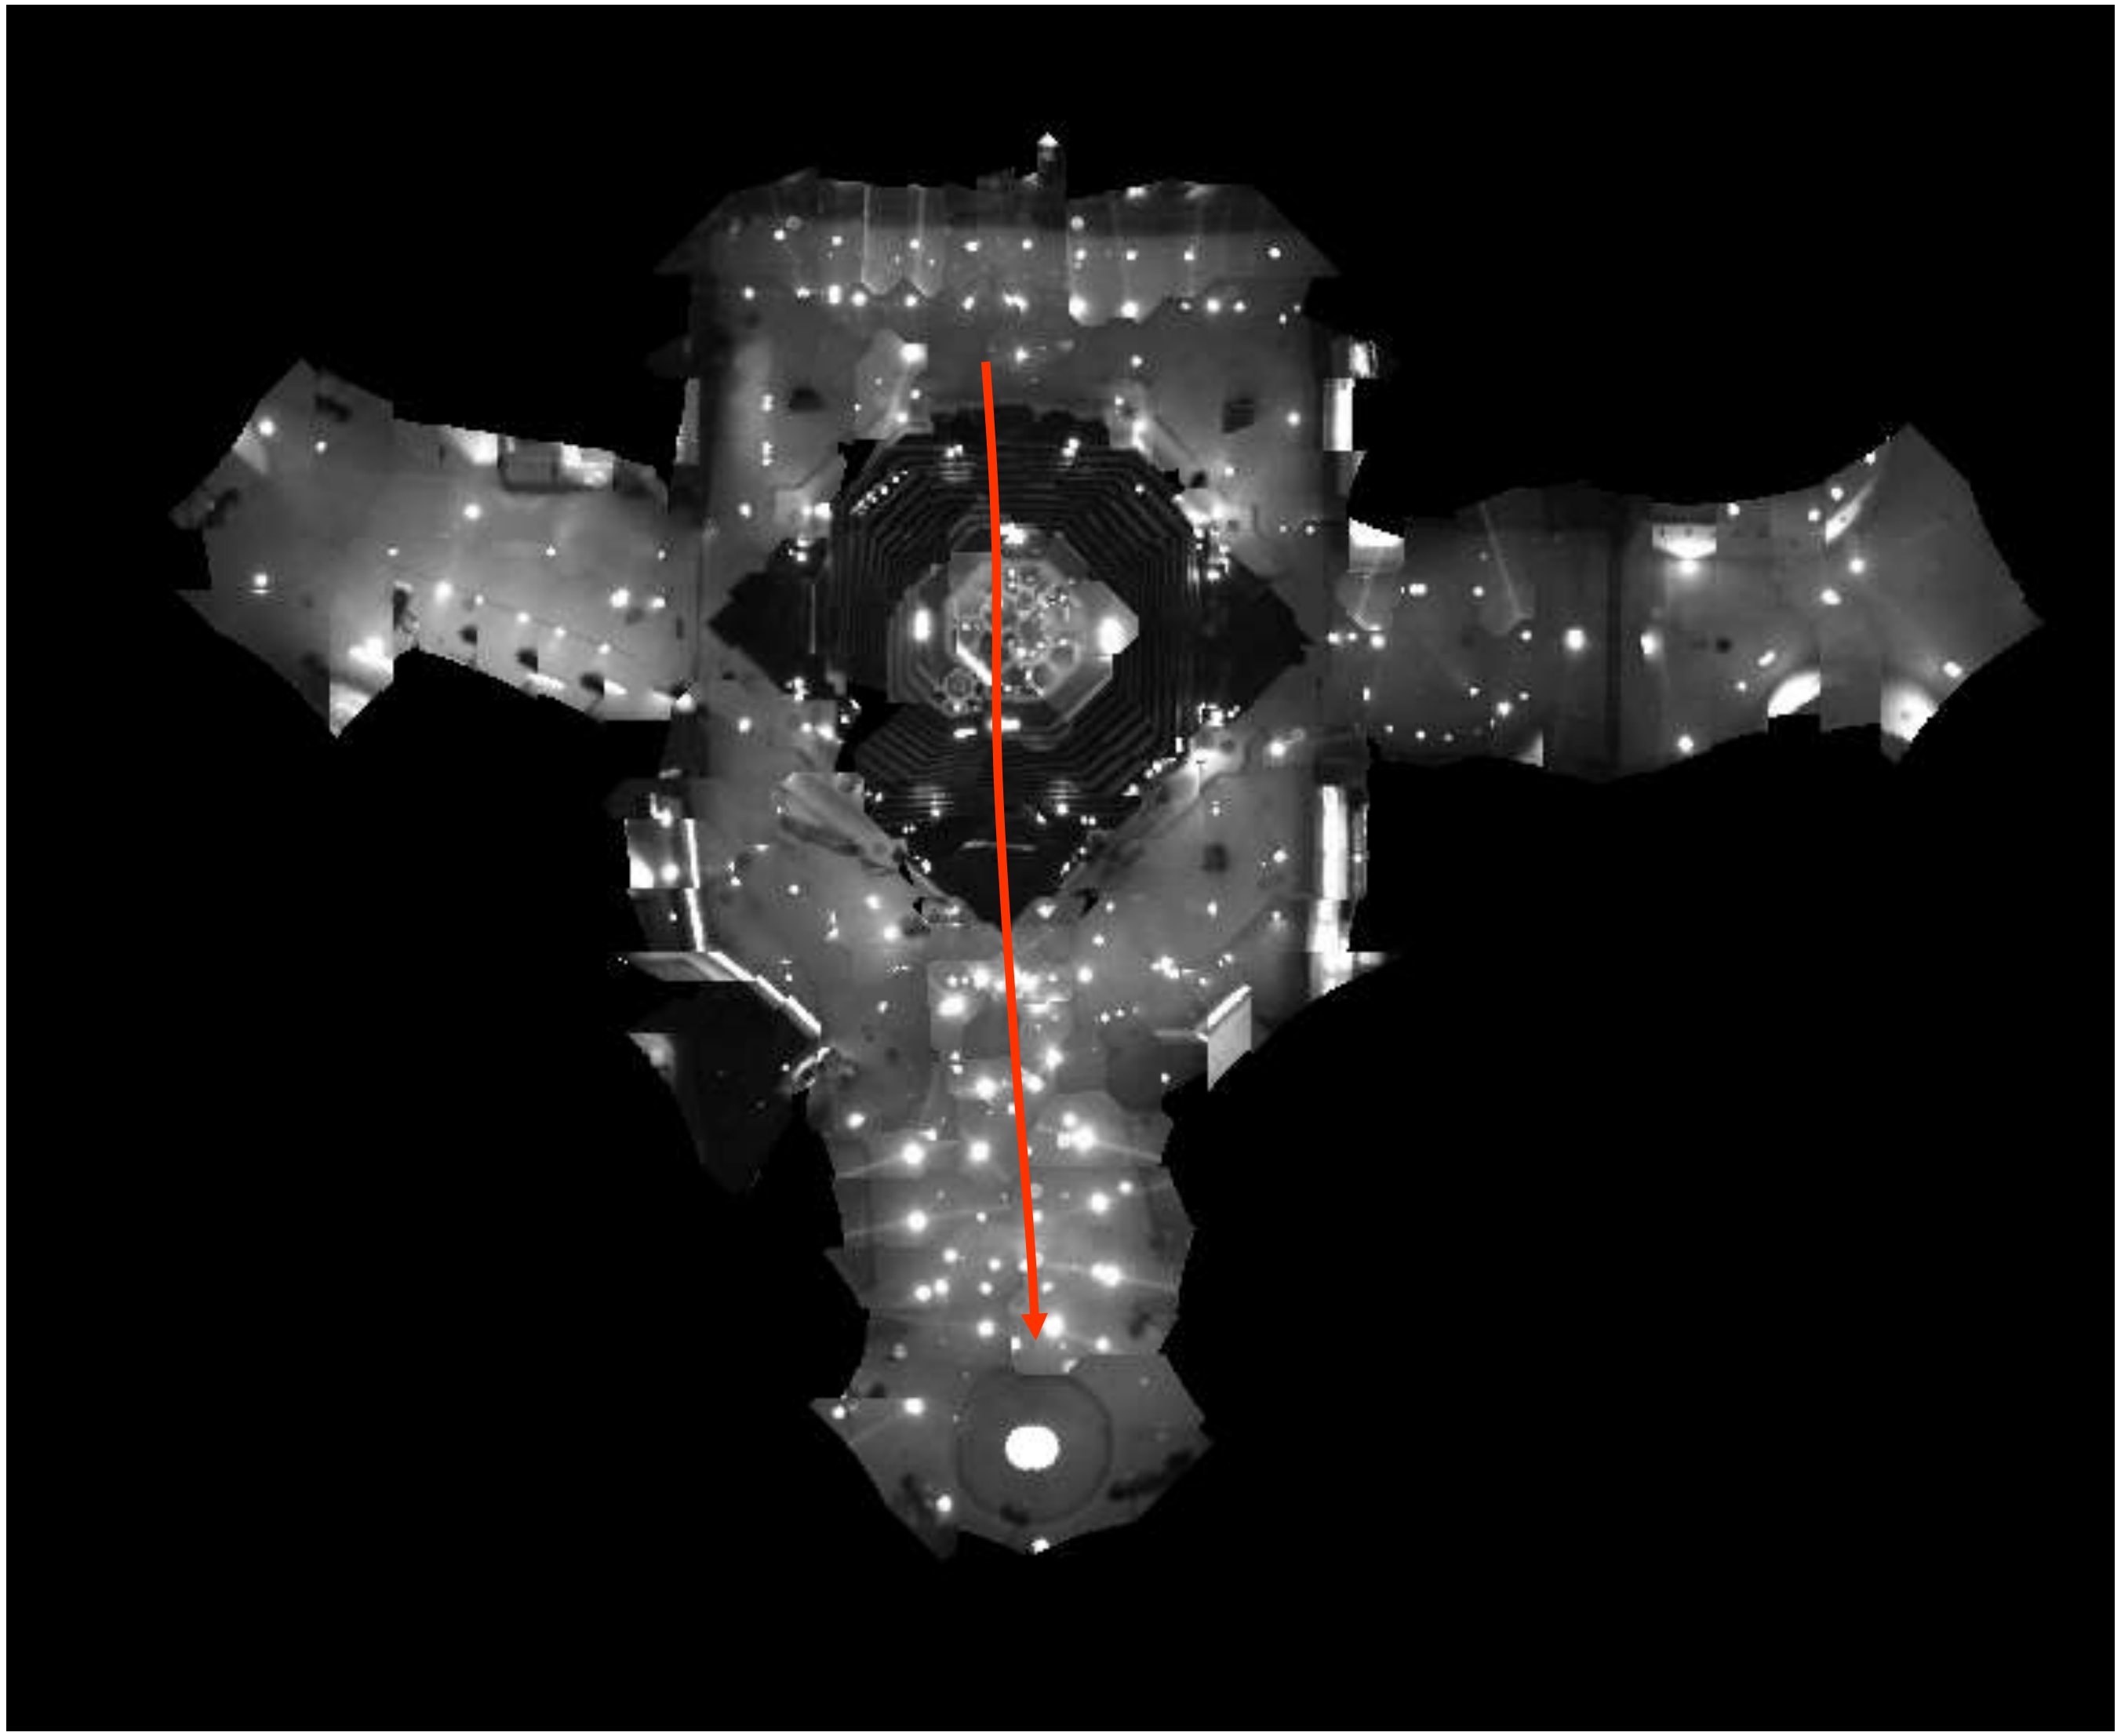

Robots in Action: Albert

Application: Rhino and Albert Synchronized in Munich and Bonn

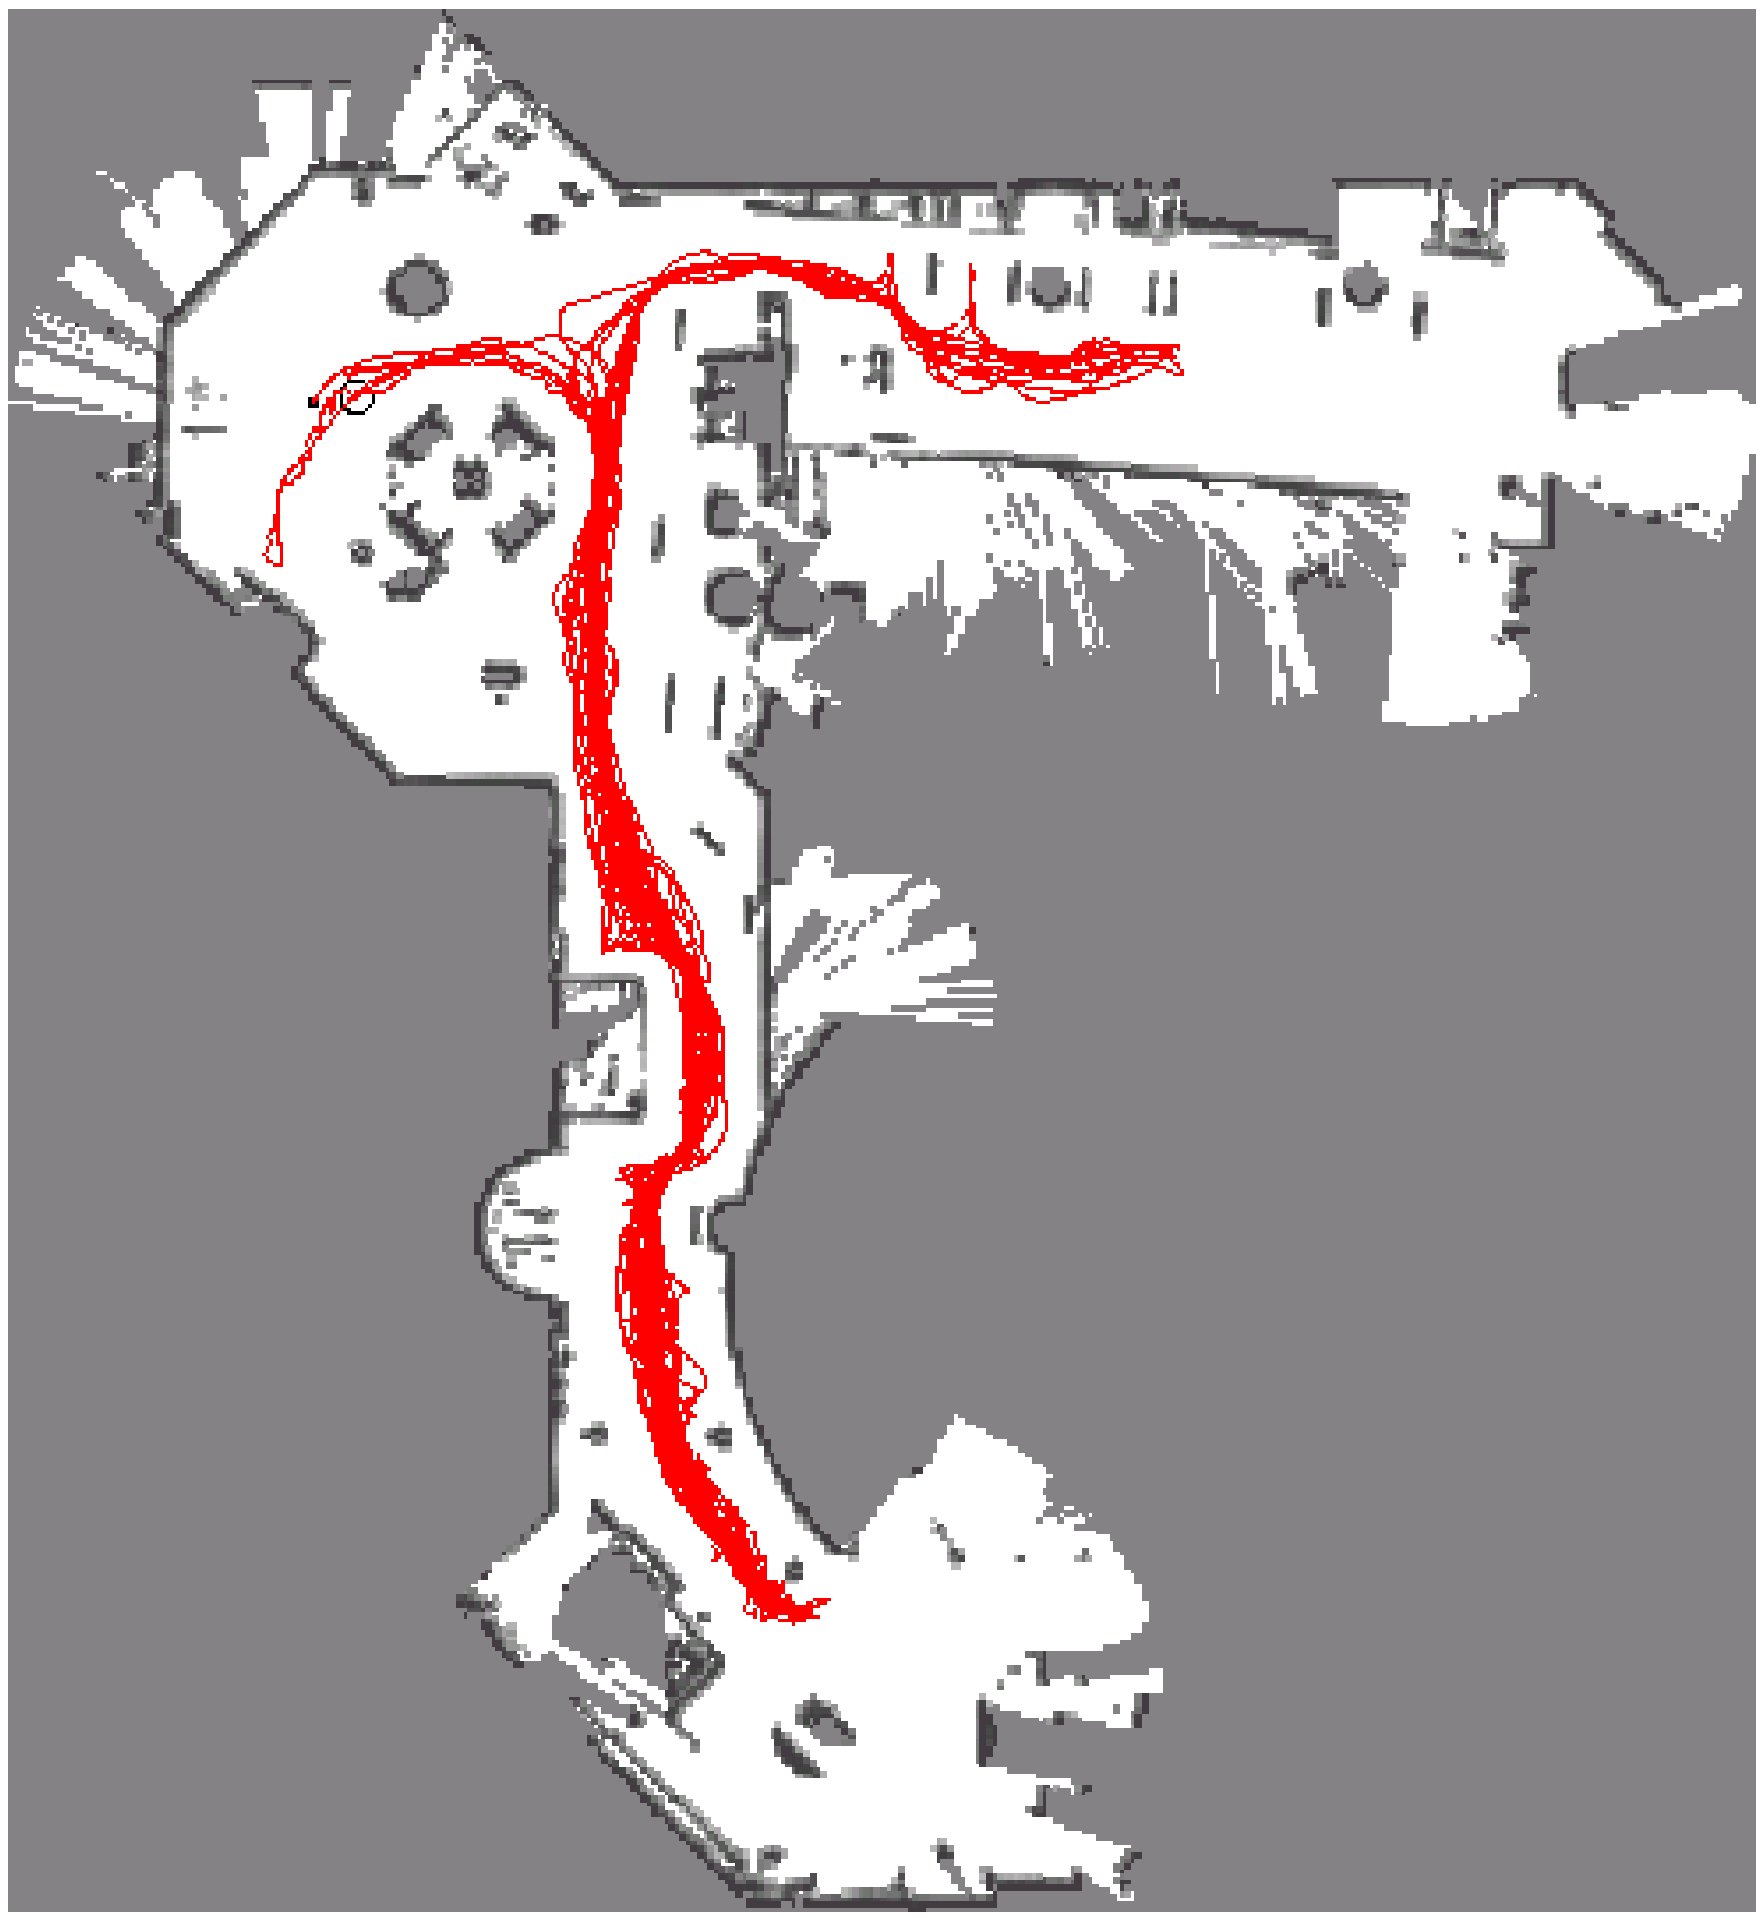

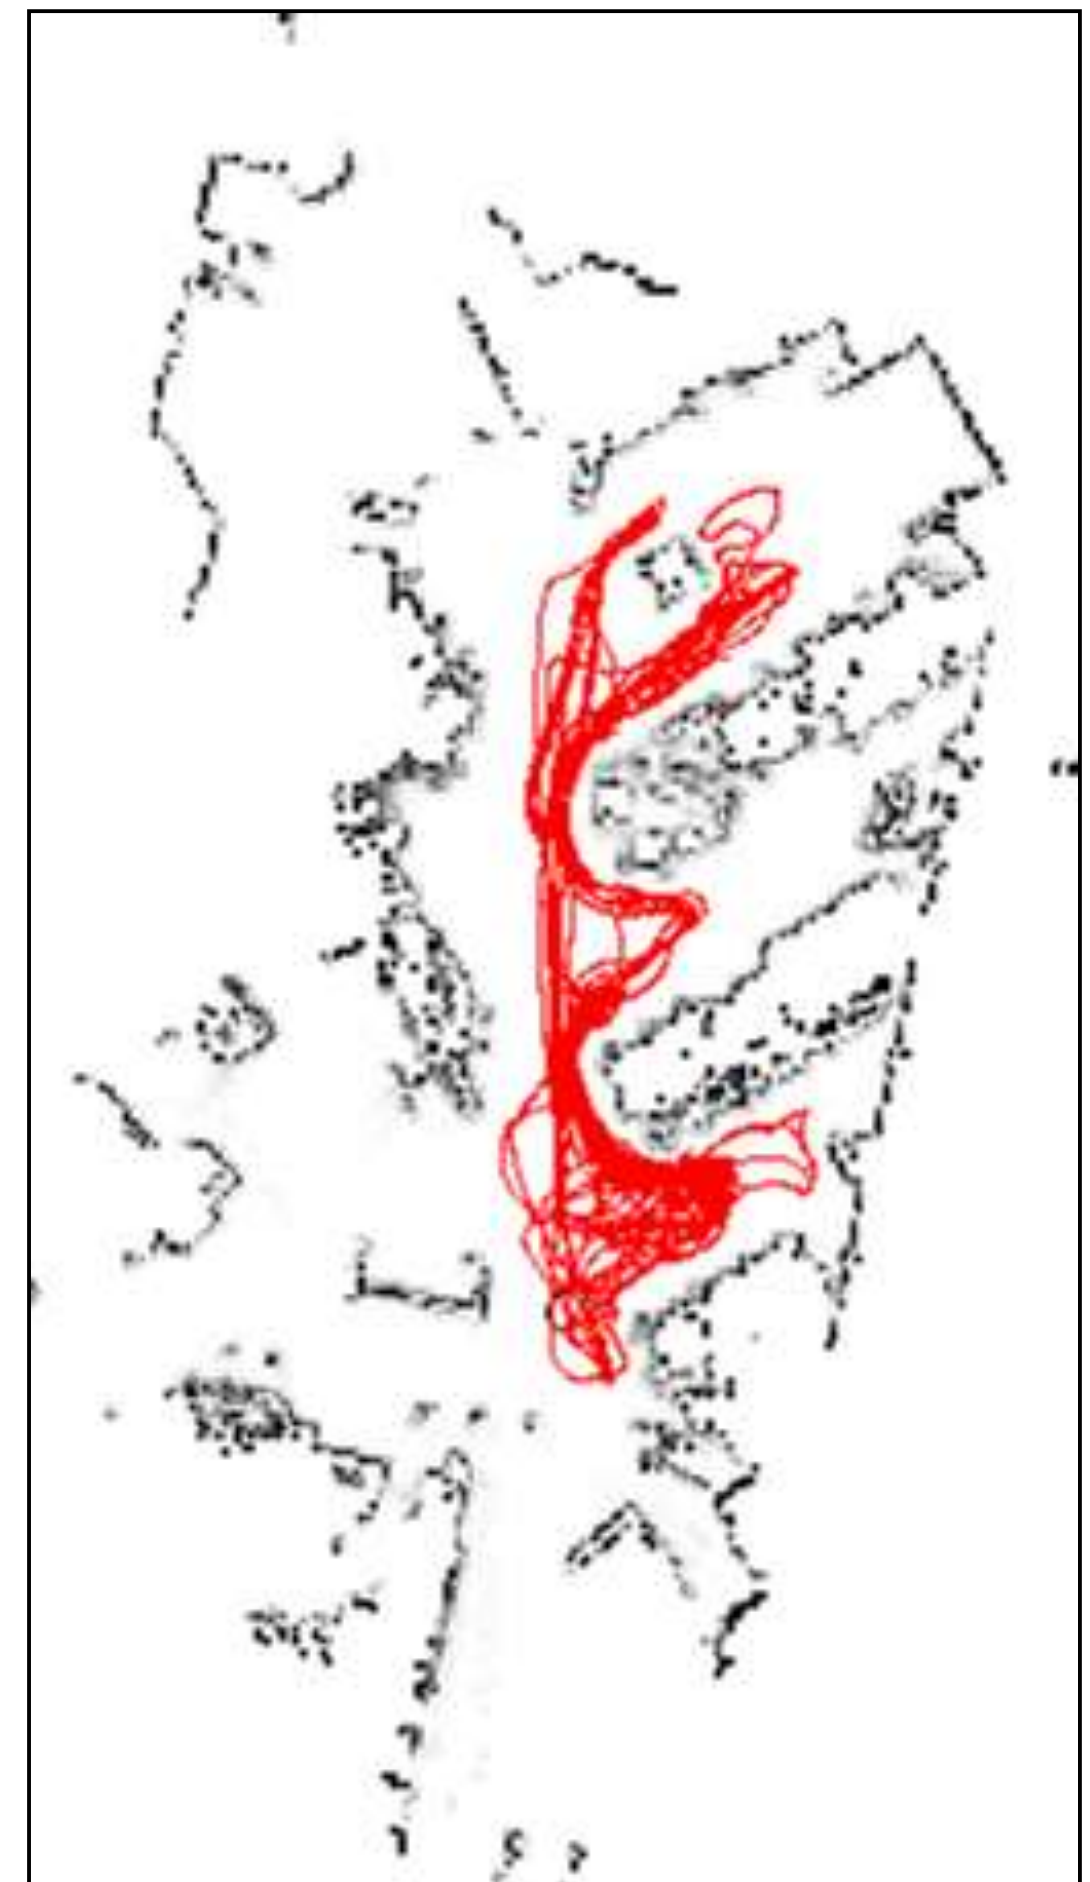

[Robotics And Automation Magazine, to appear]

Localization for AIBO robots

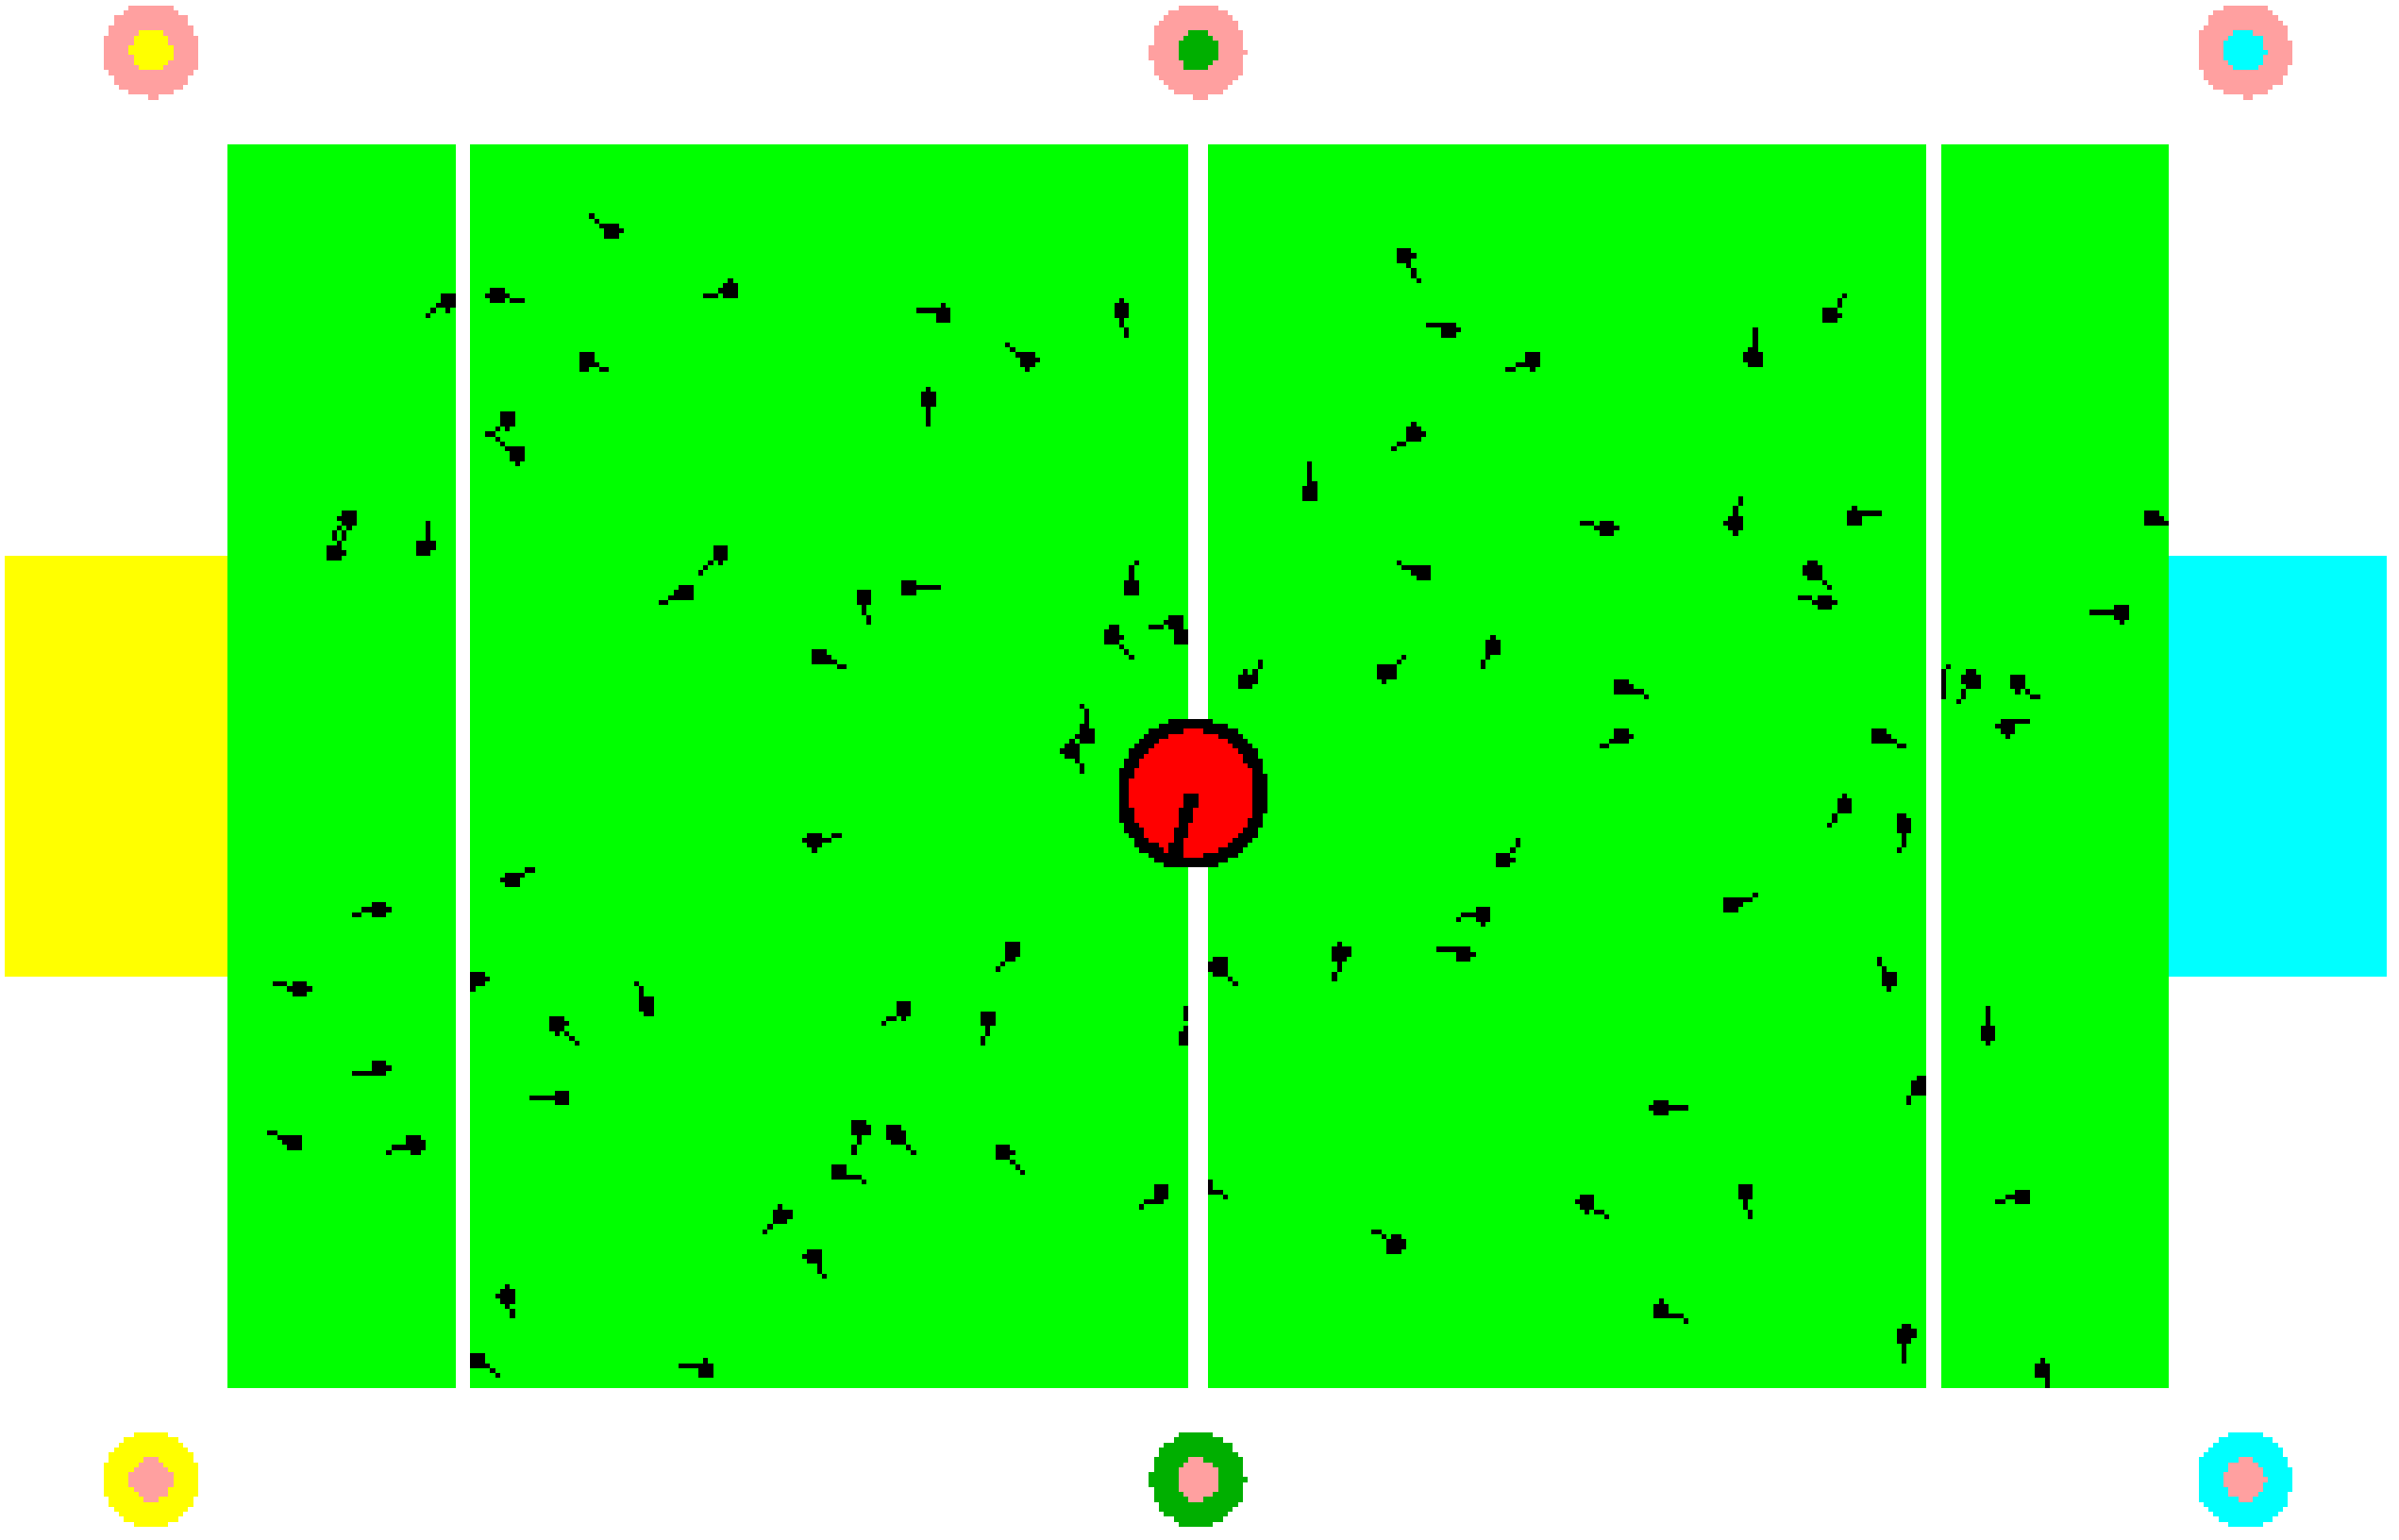

Limitations

- The approach described so far is able to
  - track the pose of a mobile robot and to
  - globally localize the robot.

- How can we deal with localization errors (i.e., the kidnapped robot problem)?

Approaches

- Randomly insert samples (the robot can be teleported at any point in time).
- Insert random samples proportional to the average likelihood of the particles (the robot has been teleported with higher probability when the likelihood of its observations drops).

Random Samples Vision-Based Localization

936 Images, 4MB, .6secs/image

Trajectory of the robot:

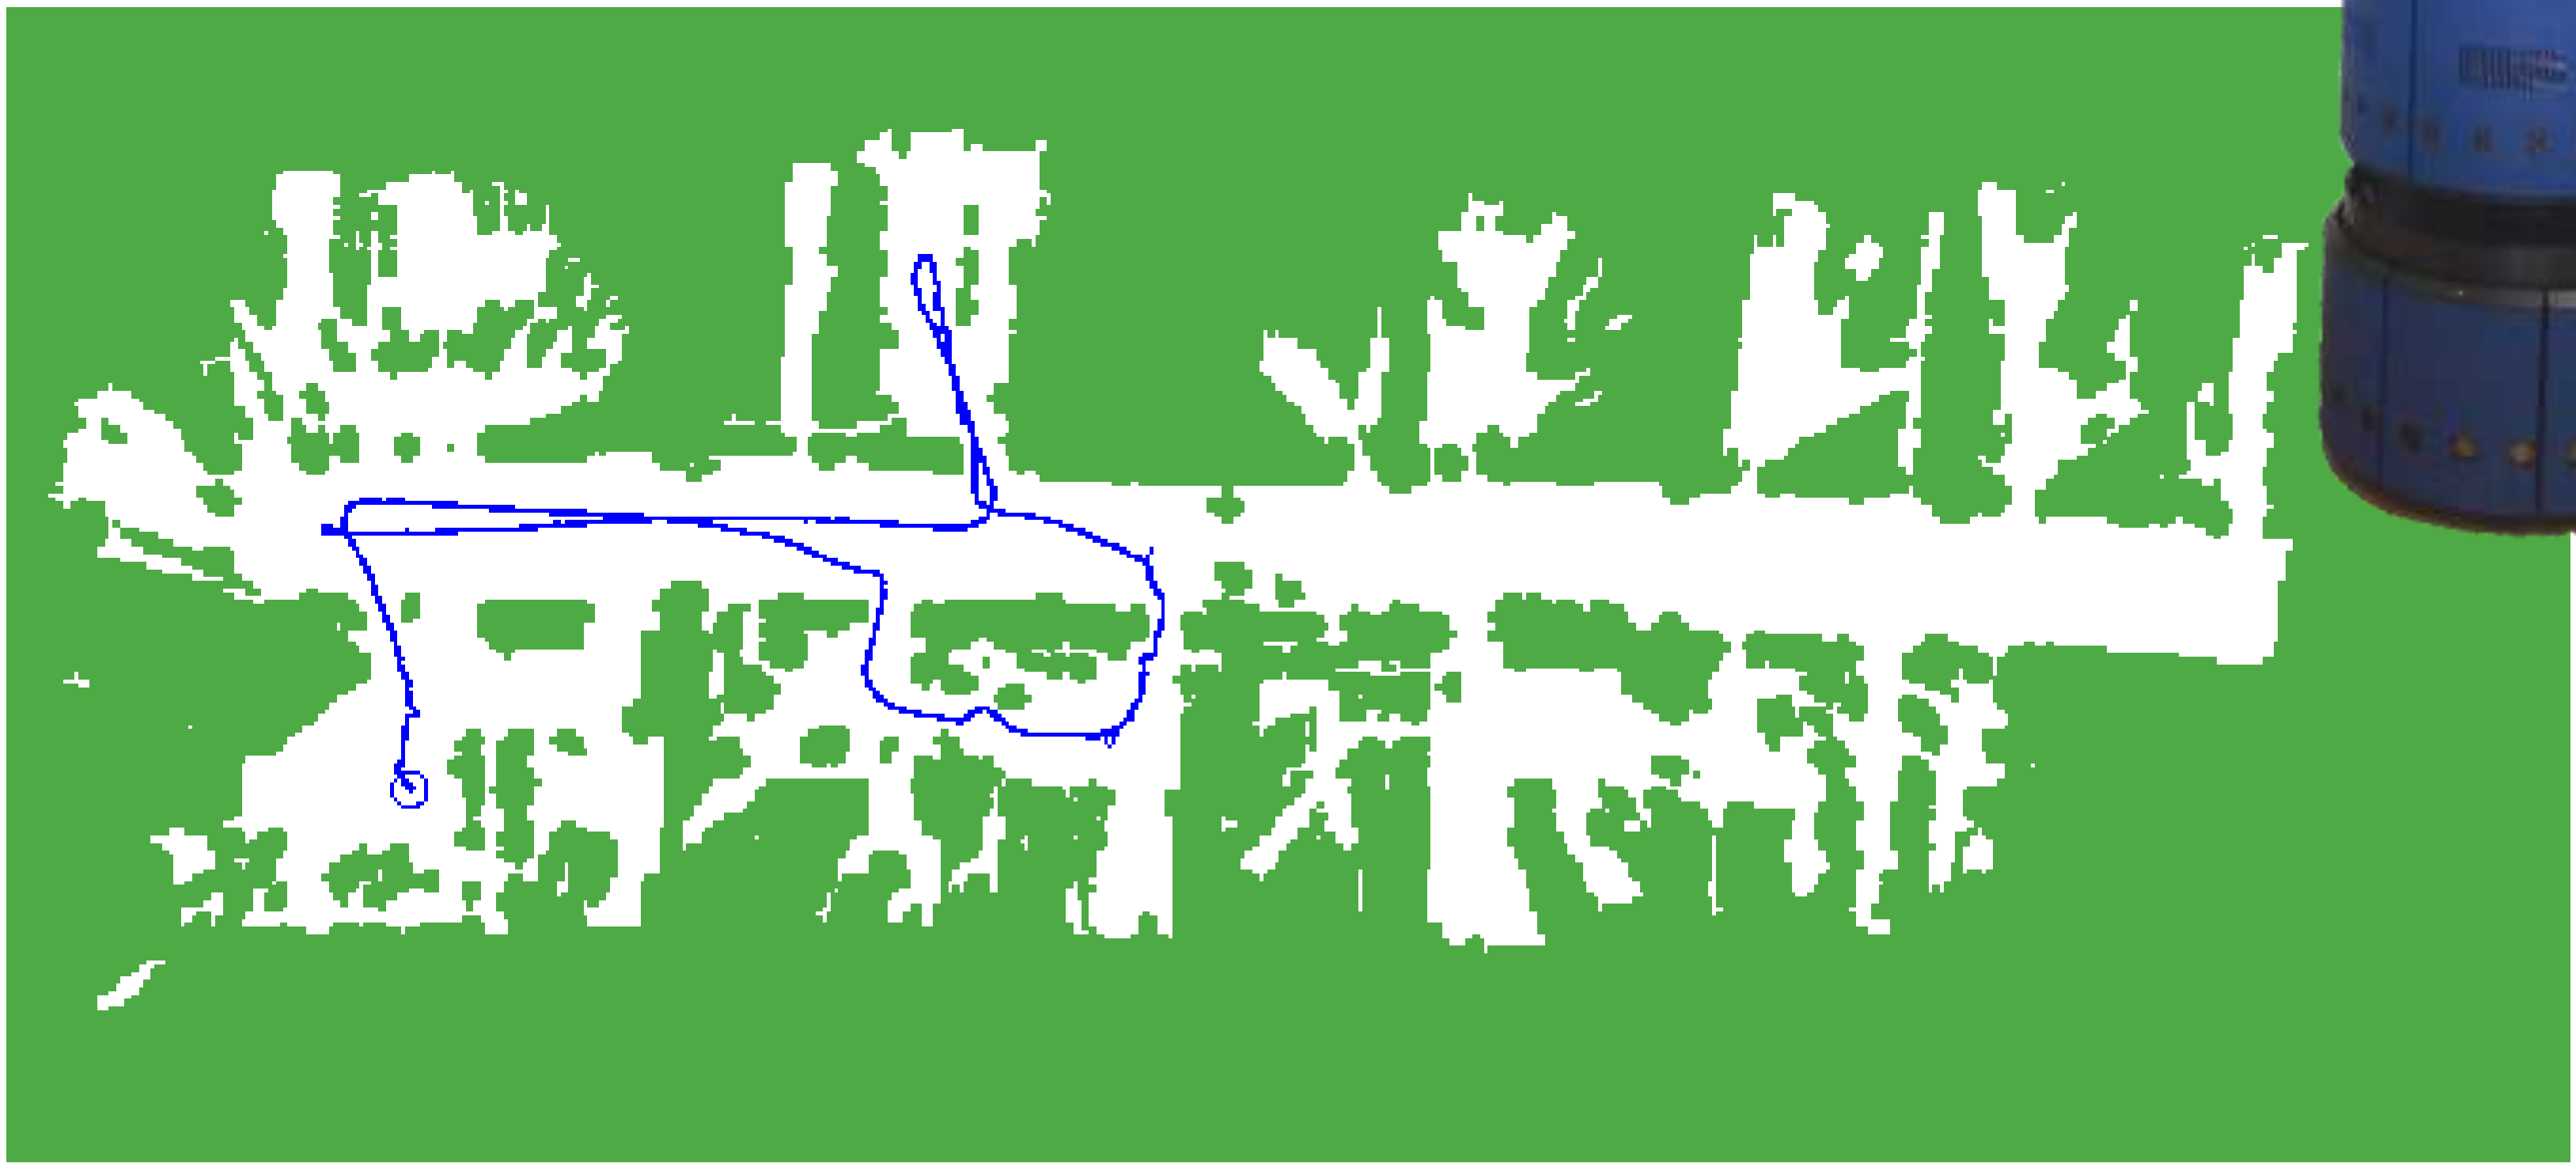

Odometry Information

Image Sequence

Resulting Trajectories

Position tracking:

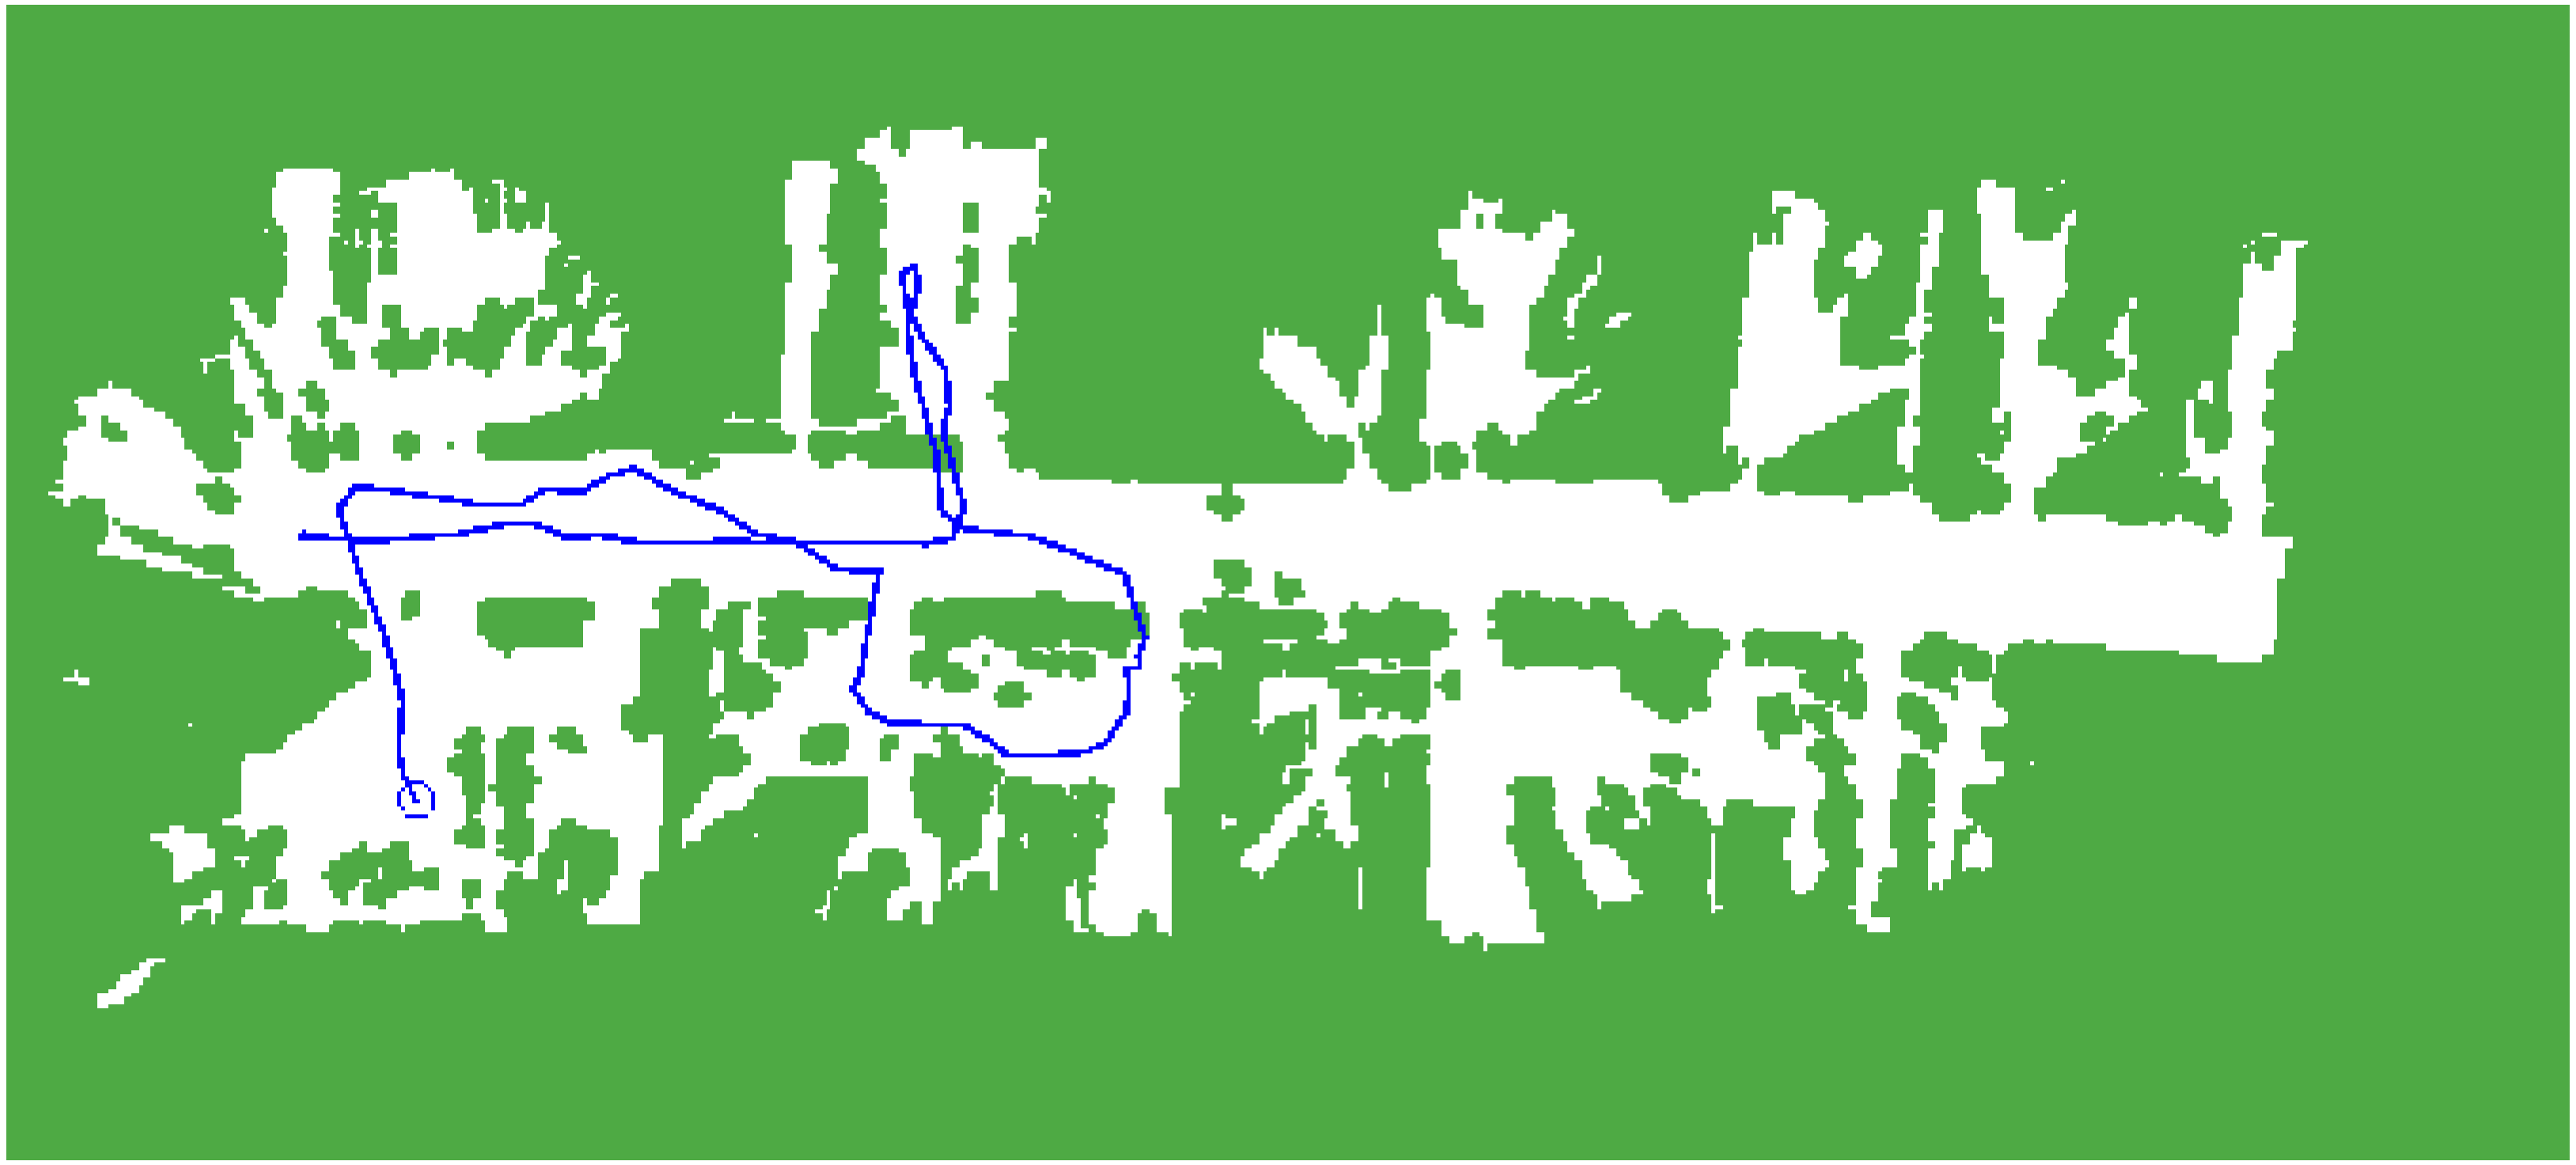

Resulting Trajectories

Global localization:

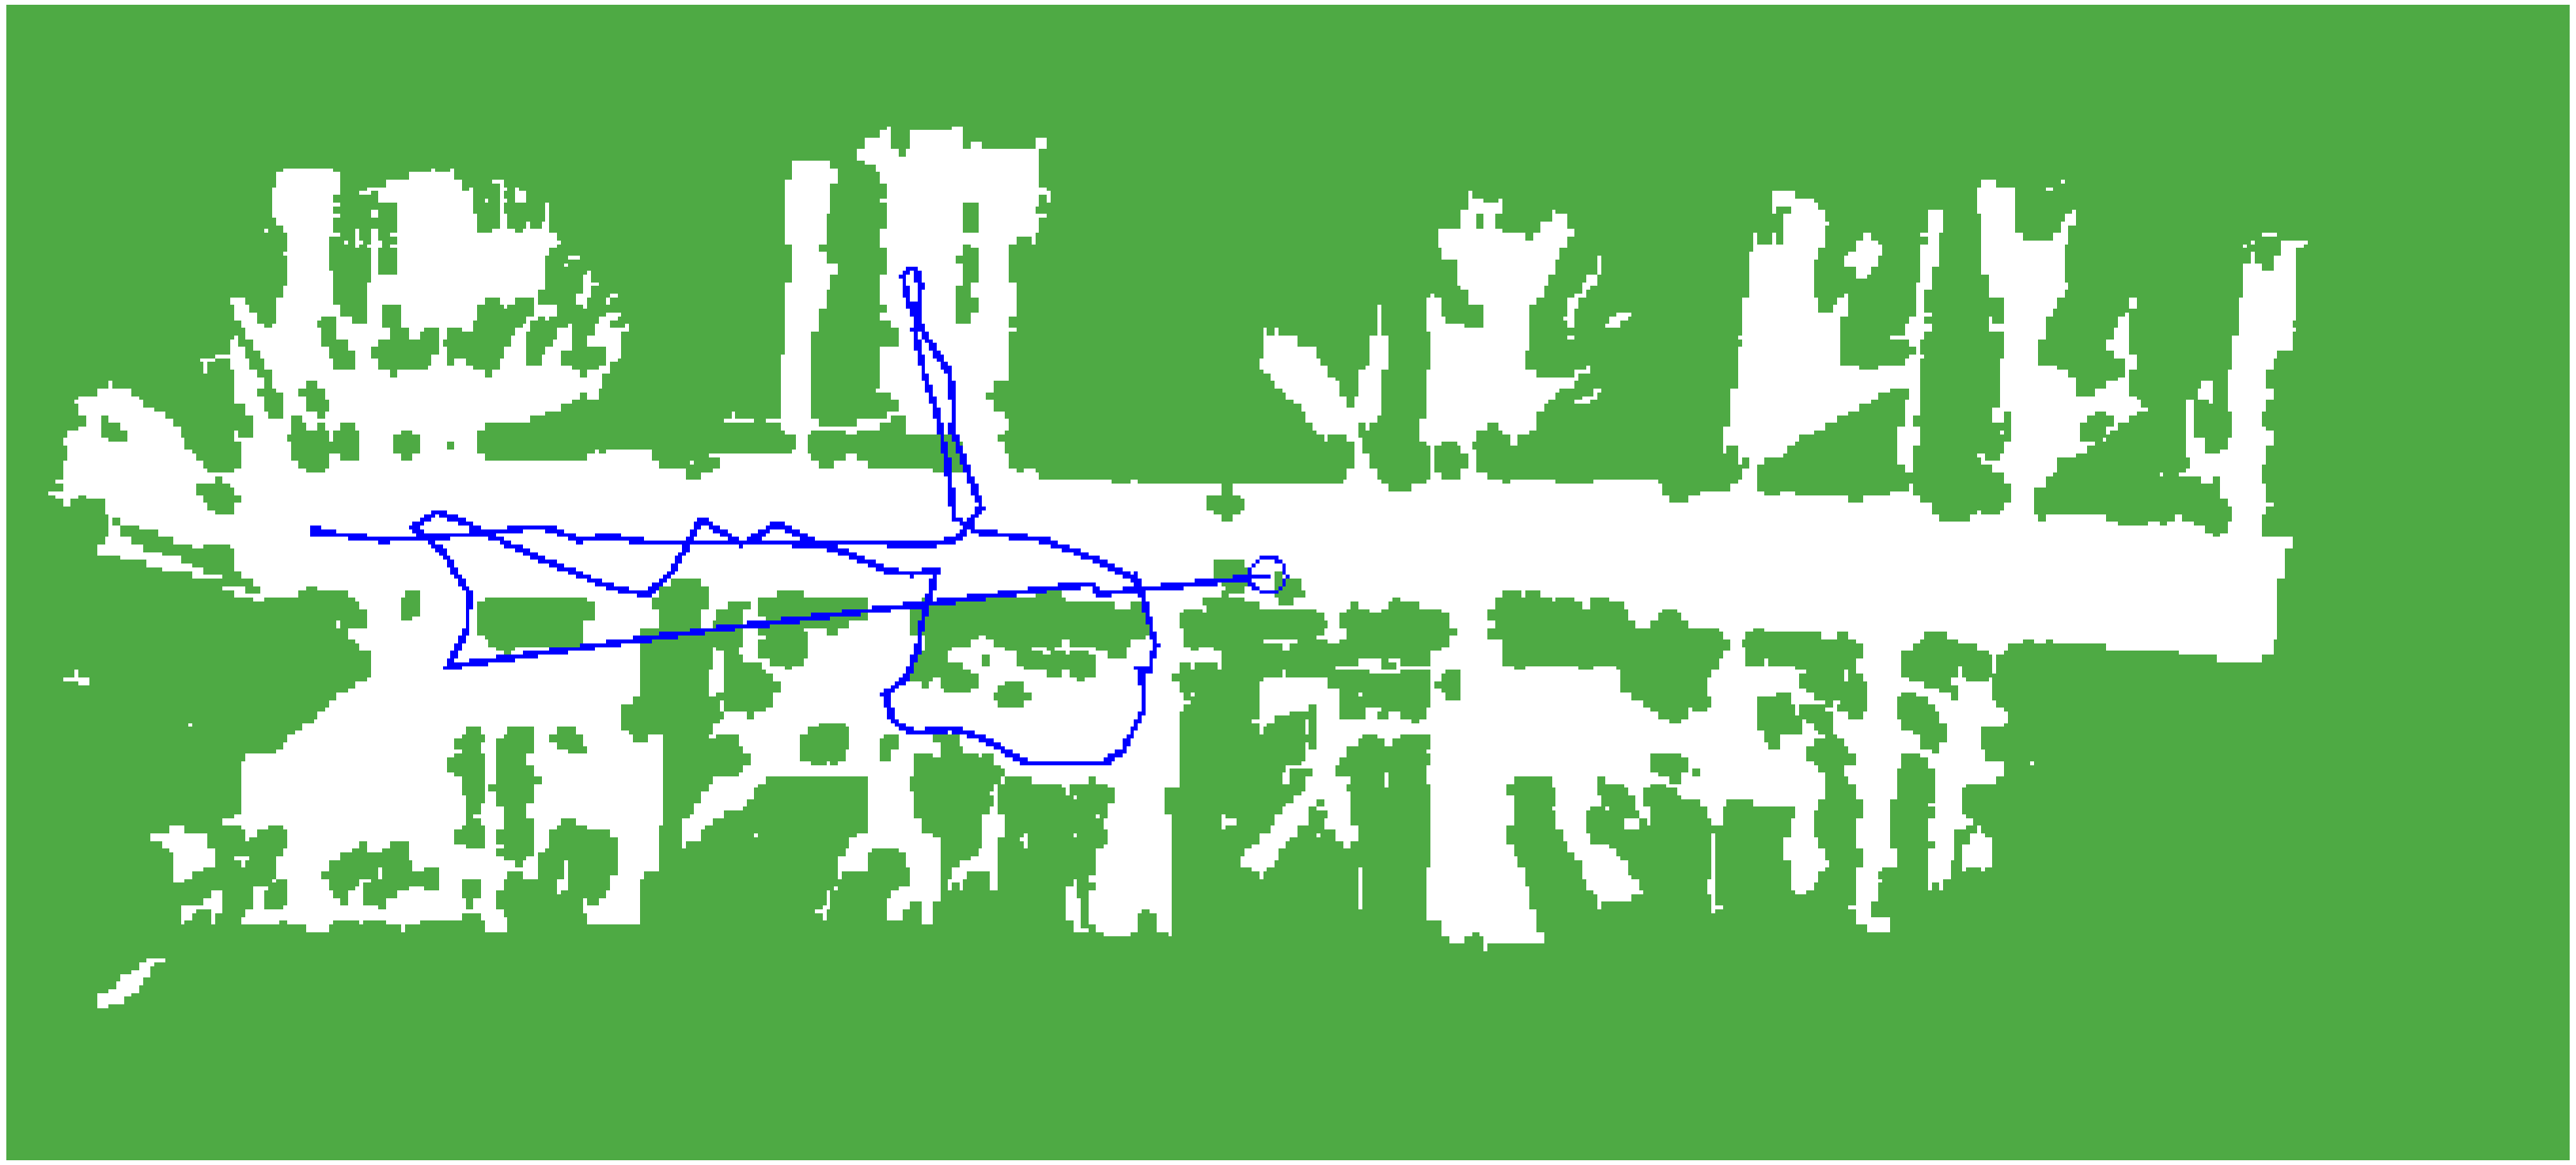

Global Localization

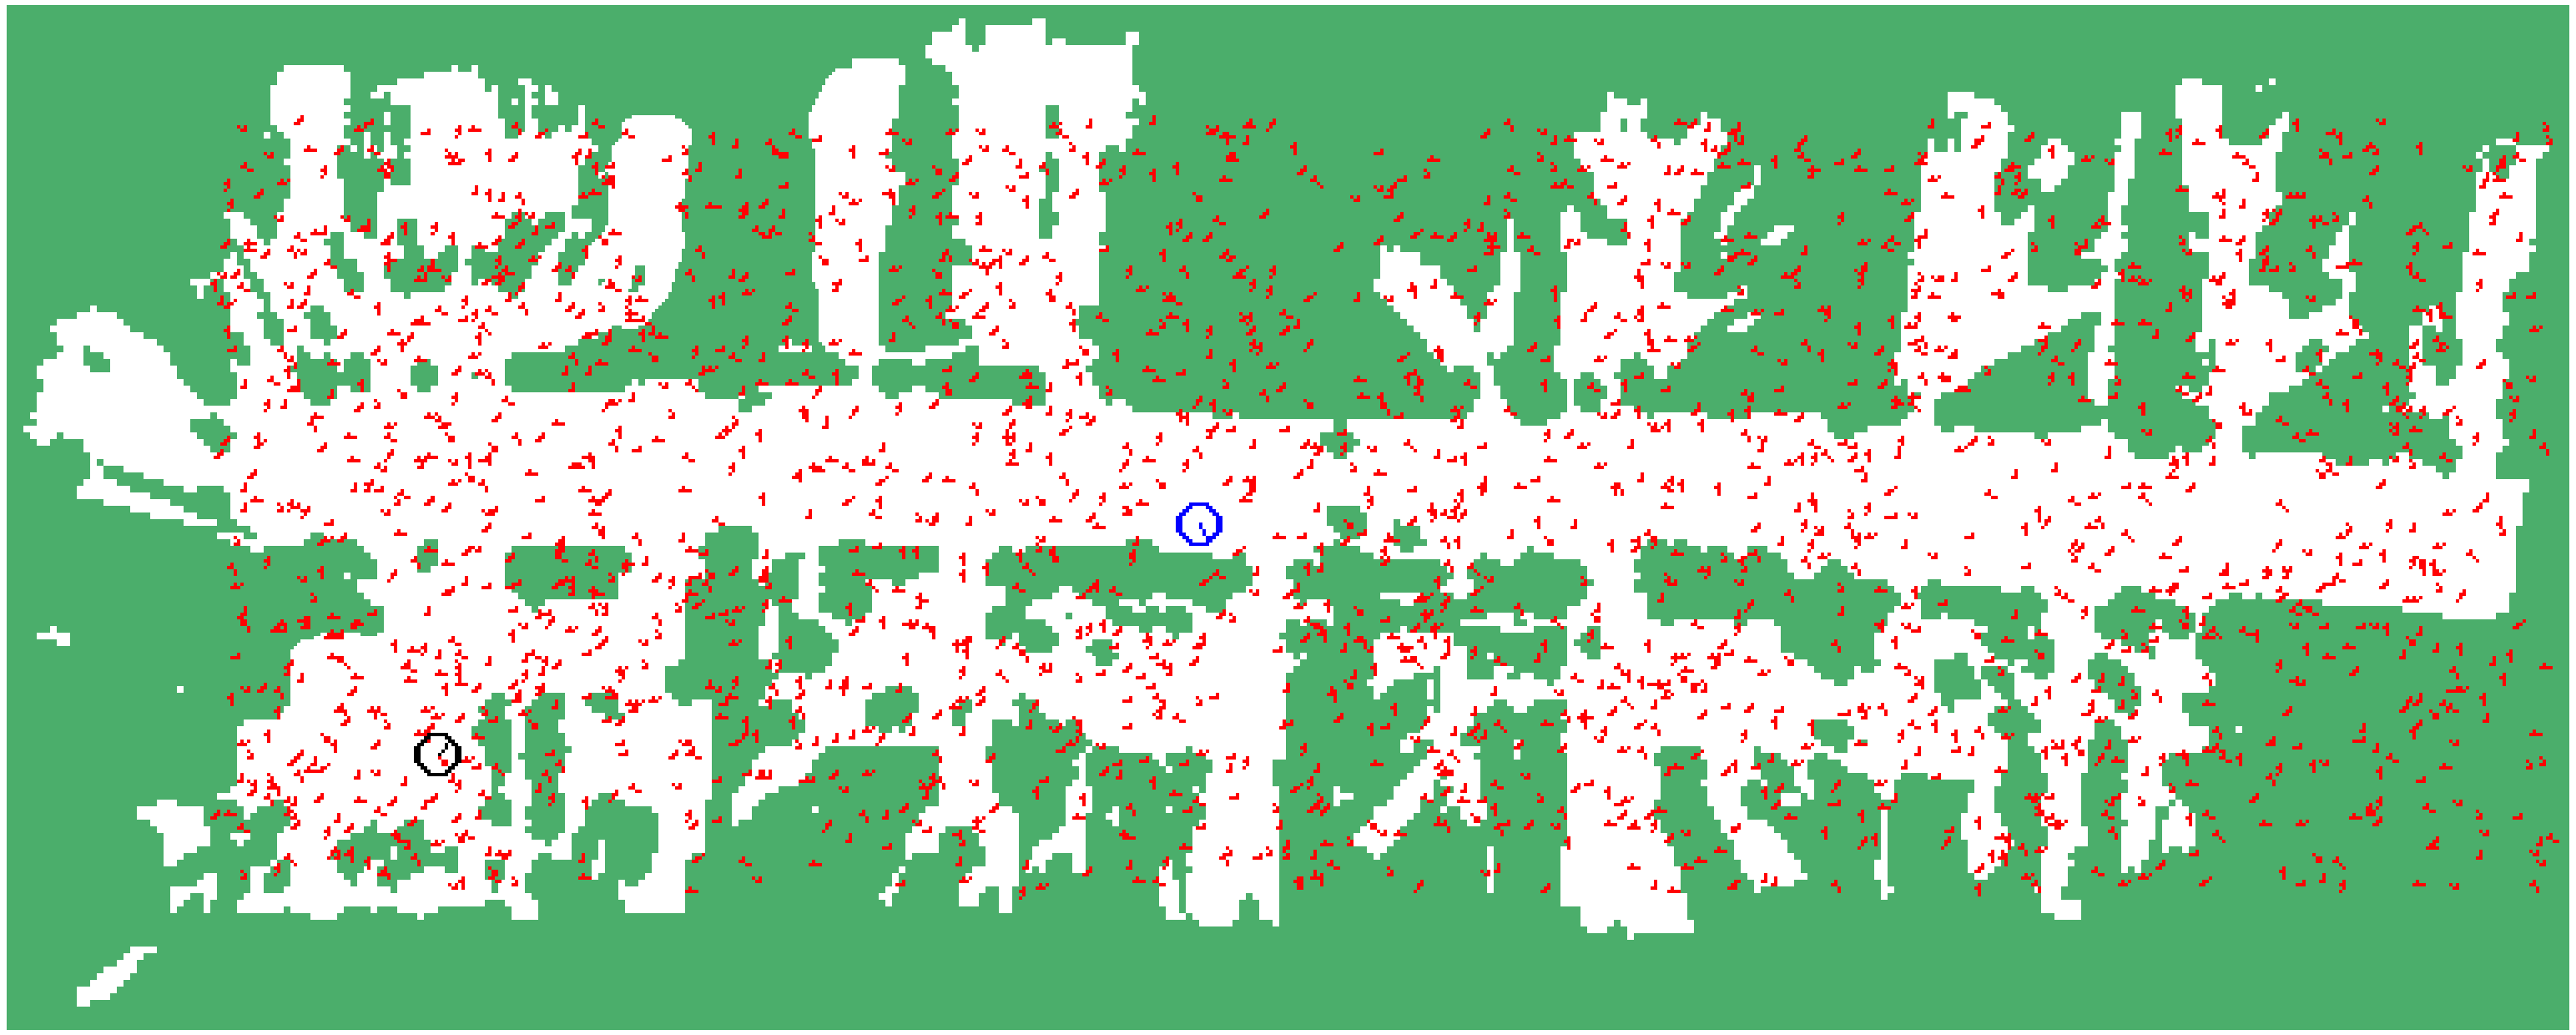

Kidnapping the Robot

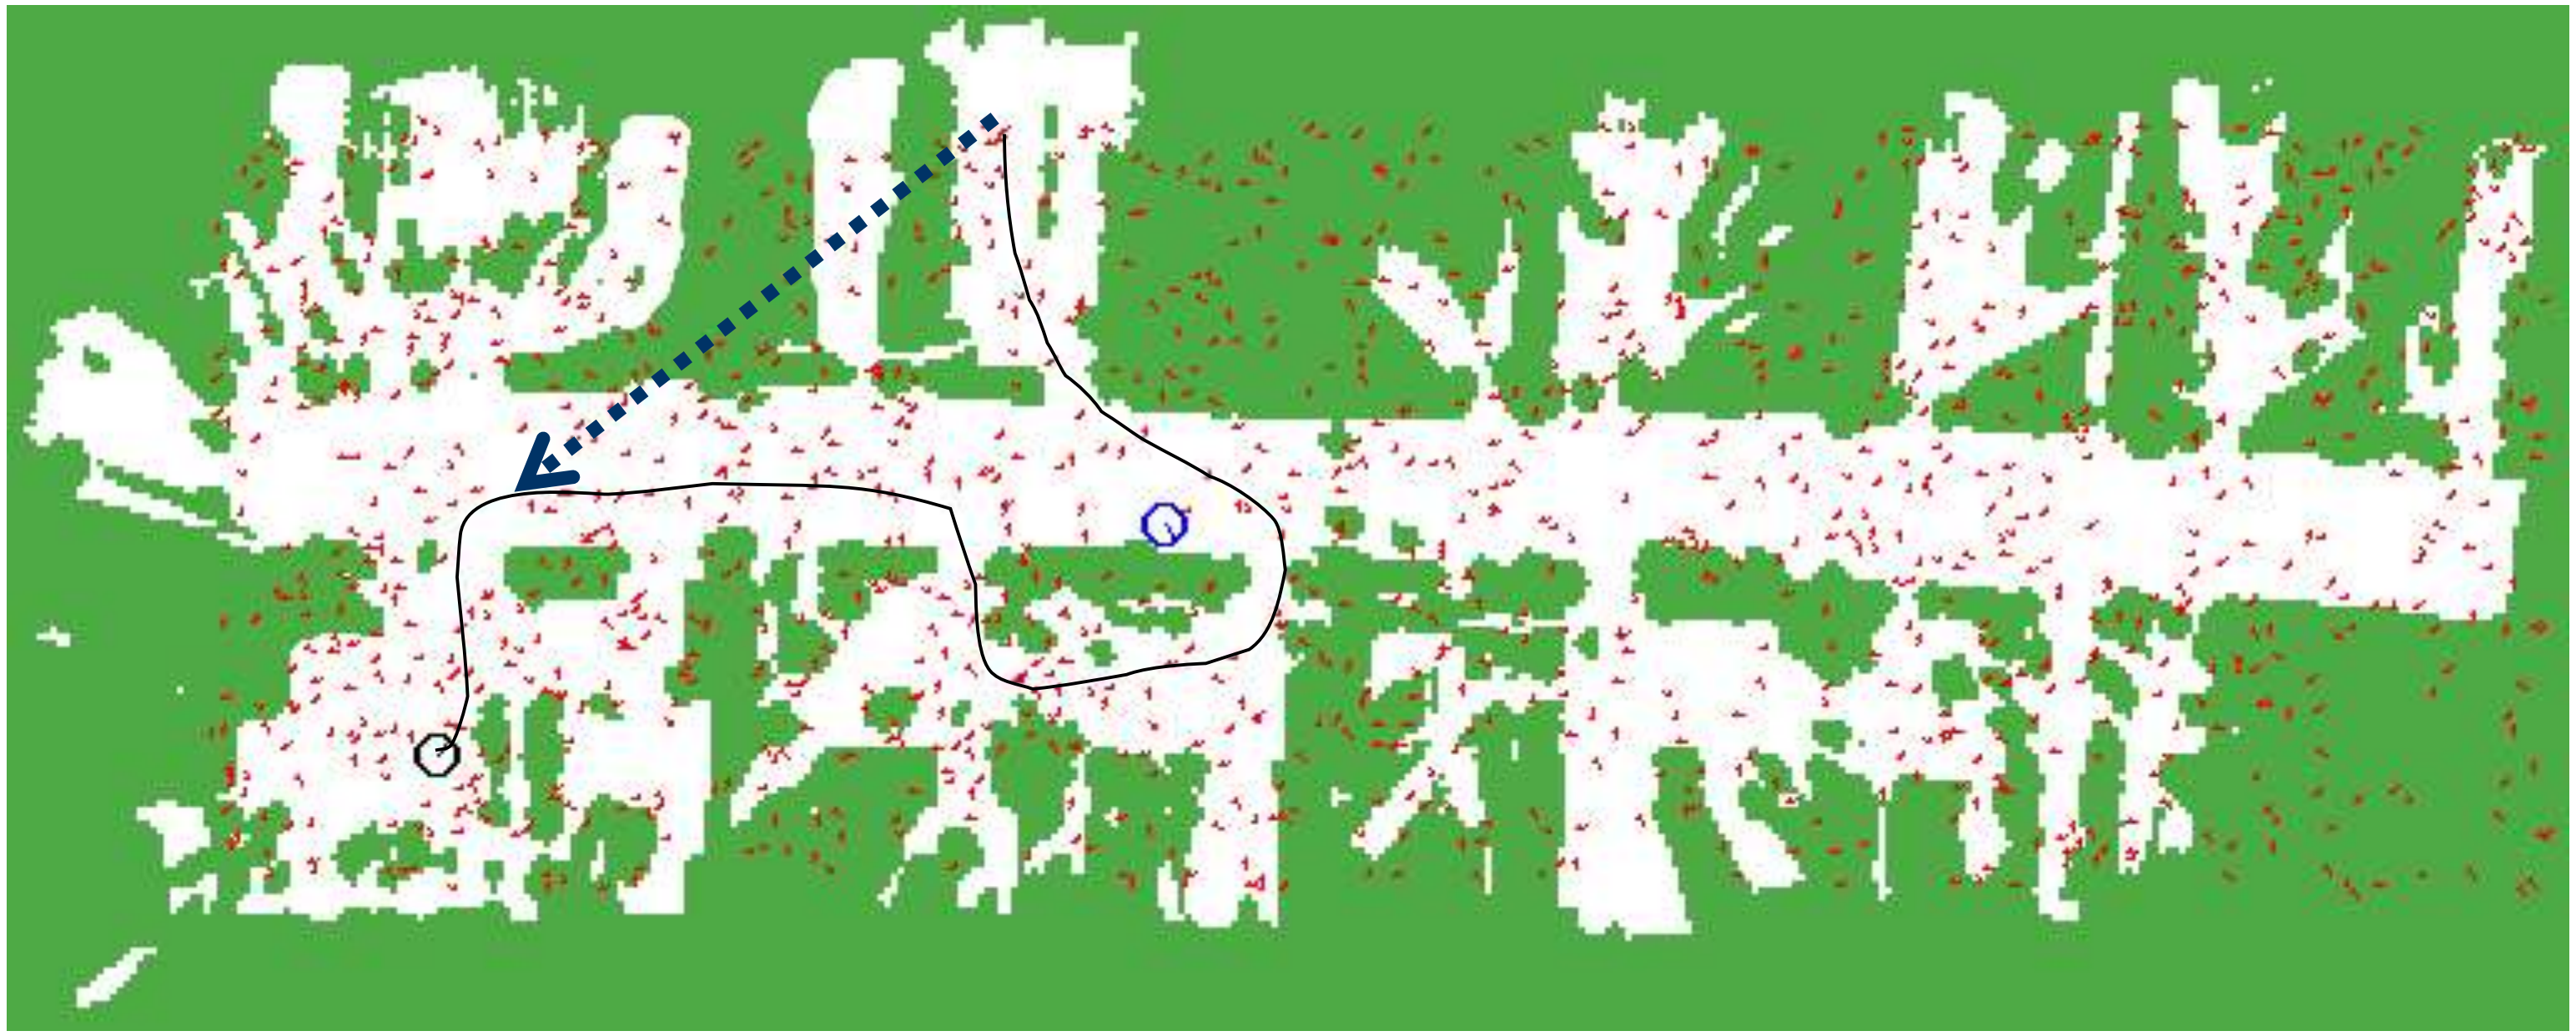

Summary

- Particle filters are an implementation of recursive Bayesian filtering
- They represent the posterior by a set of weighted samples.
- In the context of localization, the particles are propagated according to the motion model.
- They are then weighted according to the likelihood of the observations.
- In a re-sampling step, new particles are drawn with a probability proportional to the likelihood of the observation.