

Carrousel Introduction and Ejection Systems

Kosan Crisplant's carrousel introduction and ejection systems are designed for safe and fast introduction and ejection of LPG cylinders to and from carrousels.

- Maximum use of carrousel capacity
- Safe operation of carrousels
- Fully automatic cylinder flow to and from carrousels
- Systems for all cylinder types
- High capacity
- Can be integrated in carrousel filling system
- Can be integrated in chain conveyor system
- Easy installation in existing plants

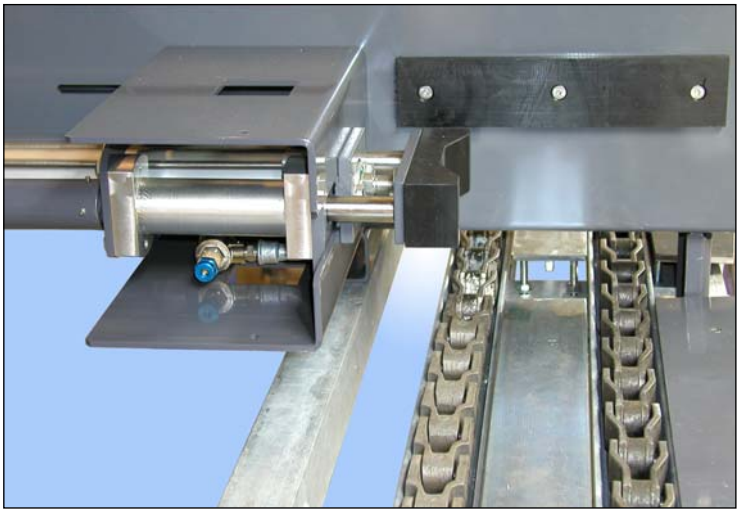


TIE introduction unit for tangential introduction of cylinders to filling carrousel

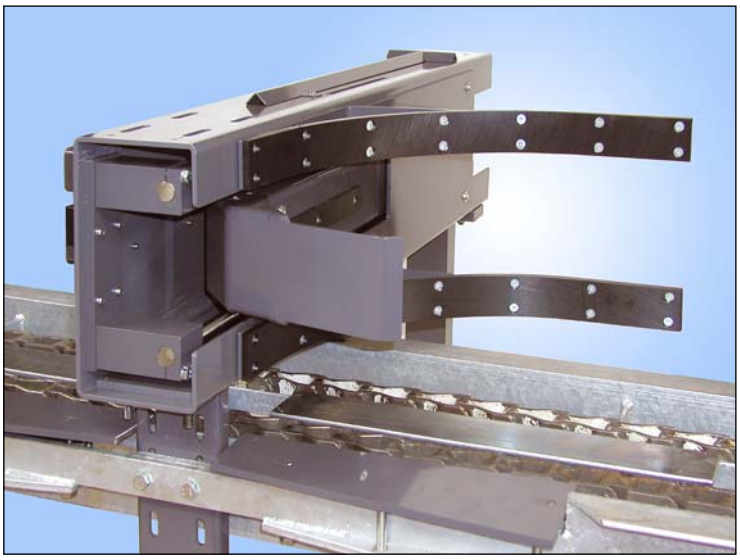

TIE ejection unit for tangential ejection of cylinders from filling carrousel

HRS introduction unit for radial introduction of cylinders to filling carrousel

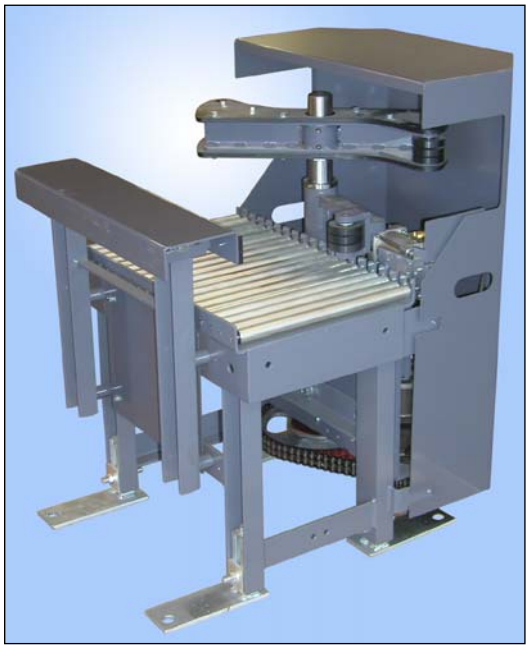



PER ejection unit for radial ejection of cylinders from filling carrousel

Carrousel Introduction and Ejection Systems

Your benefits


- No manual handling before or after carrousel
- No introduction if filling machine on carrousel is occupied
- No ejection if cylinders are accumulated on chain conveyor after carrousel
- In case of CUC controlled system:
  - Non touch control
  - Automatic data transfer to filling machine and check scale

Your possibilities

- Tangential design:
  - with introduction and ejection
  - with introduction and arrangement for activation of pusher on each filling machine
- Tangential design can be combined with valve orientation
- Radial design:
  - with introduction and ejection
  - with introduction and arrangement for activation of pusher on each filling machine
- Pneumatic system or electronic CUC controlled system
- Adjustment of system speed to carrousel speed



Radial introduction unit combined with tangential ejection unit with a cylinder pusher on each filling machine

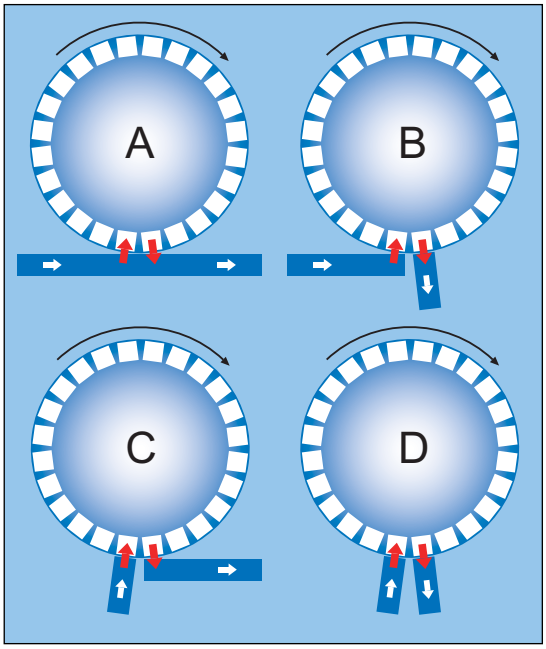

Introduction and ejection systems

A Tangential introduction and ejection
B Tangential introduction and radial ejection
C Radial introduction and tangential ejection
D Radial introduction and radial ejection

The illustrated introduction and ejection systems are designed for filling carrousels with clockwise rotating direction. All systems are available for filling carrousels with anticlockwise rotating direction.



Carrousel filling systems with radial introduction and ejection units



Top: TIE tangential introduction unit
Bottom: TIE tangential ejection unit

Your safety

- All carrousel introduction and ejection systems are EU approved and designed in accordance with current EU directives, incl. the ATEX Directive (94/9/EC)
- All carrousel introduction and ejection systems are designed for use in hazardous areas classified as Zone 1 according to IEC 79-10 and Class I, Division 1 according to NEC (USA), article 500
- National/local approvals