

© Kosan Crisplant 2001

General Description

The electronic check scale, type ECS, is an independent unit designed for stationary installation on floor, and is used for manual check weighing of gas cylinders.

The tare values of the cylinders are manually encoded by an operator by means of a keyboard on a control terminal.

The check scale is based on the electronic control/weighing computer type CUC, which is an independent unit that controls and checks the actual check weighing process.

The electronic check scale type ECS consists of the following main components:

- Lower scale with load cell
- Base console with rust-proof weighing plate
- Control terminal on adjustable support with control/weighing computer, keyboard and display
- Power supply for connection to main power installation

Scope of Supply

The check scale is supplied complete for stationary installation on floor including corresponding lower scale with load cell, base console with rust-proof weighing plate, control terminal on adjustable support with control/weighing computer, keyboard and display, and power supply for connection to main power installation.

Additional Equipment

(Only included if specified in quotation)

- Standard spare parts set


© Kosan Crisplant 2001

Technical Data

Capacity and conditions	• Approx. 400 cylinders/hour, depending on the following factors: – The quality of the tare value marking on the cylinders – The operator and the cylinder flow to and from the check scale
Cylinder dimensions (requirements and limitations)	• Cylinder diameter: Max. 450 mm
Necessary connections (specifications and quality requirements)	• Electrical power installation (via the power supply): – Voltage: 1-phase + neutral + earth (voltage variation from 85 to 264 V AC) – Frequency: 50/60 Hz • Earth net: – Max. transition resistance between earth wire and earth: ≤ 2.0 Ohm
Consumption data	• Electrical power: – < 100 w
Weight	• Approx. 50 kg
Static surface load	• < 0.1 N/mm² (1.0 kp/cm²)
Approvals	• The machine is designed for use in hazardous areas classified as Zone 1 according to IEC 79-10 and Class I, Division 1 according to NEC (USA), article 500 • The weighing computer type CUC and the load cell are approved according to the EU weight standard EN 45501 • The weighing accuracy is according to OIML R76-1, accuracy class III
Other data	• The weighing computer calculates and shows the weight in kilograms according to the SI standard • Weighing range: Min. 5 kg - Max. 120 kg • Display division: 100 g (e.g. 15.1 kg, 15.2 kg, 15.3, etc.) • The check scale is designed for installation in locations in which the temperature may vary between -10°C and +40°C

© Kosan Crisplant 2001

Dimensions in mm

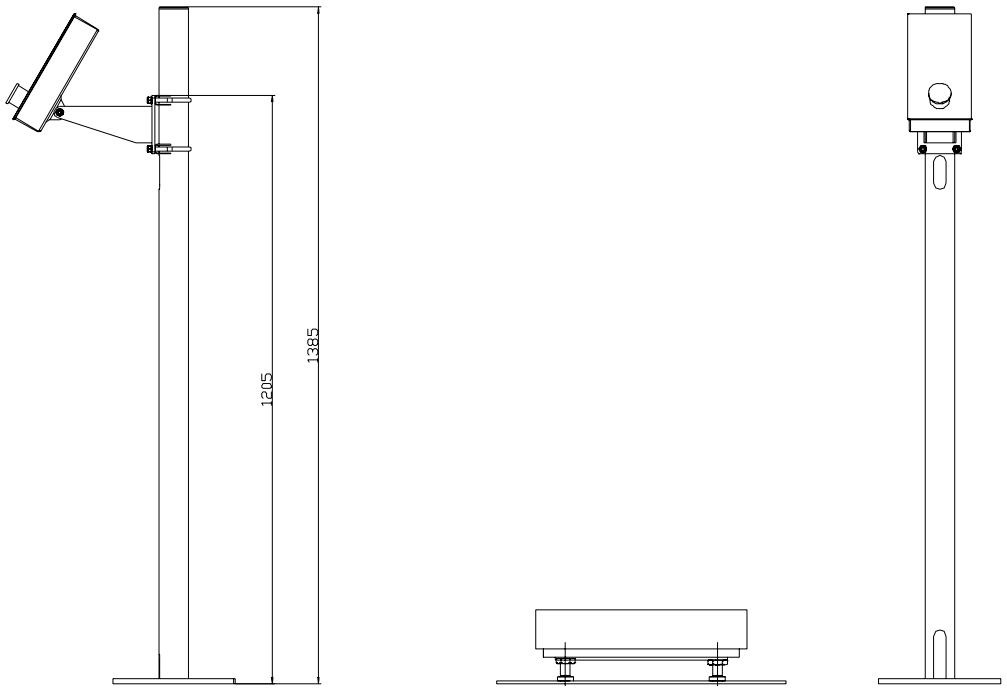

© Kosan Crisplant 2001