Electronic Leak Detectors

Kosan Crisplant's electronic leak detectors perform leak tests on cylinder valves. The cylinders are approved or rejected according to a preset maximum allowed leakage level.

- Provide maximum safety
- Fully automatic leak detection with same sorting limit
- Eliminate human errors
- Detect all kinds of leak around the valve
- Flexible for all types of valves
- Flexible for all cylinder diameters and heights
- Easy installation in existing plants
- Minimum space requirements
- Competitive price


Your benefits

- Safe LPG cylinders to your end-users
- 100% leak test – all filled LPG cylinders are tested
- Savings on manpower thanks to automatic sorting of leaky cylinders
- Easy to use calibration tools and procedure




Calibration/test cylinder



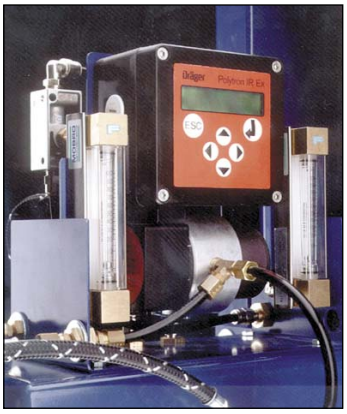

Gas detector

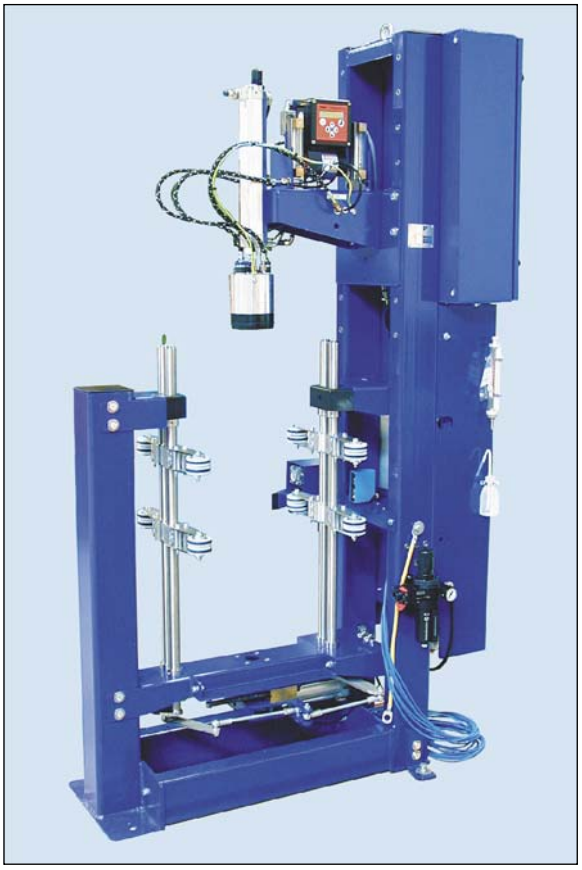


Fully automatic ET-GD leak detector





Pressure transmitter

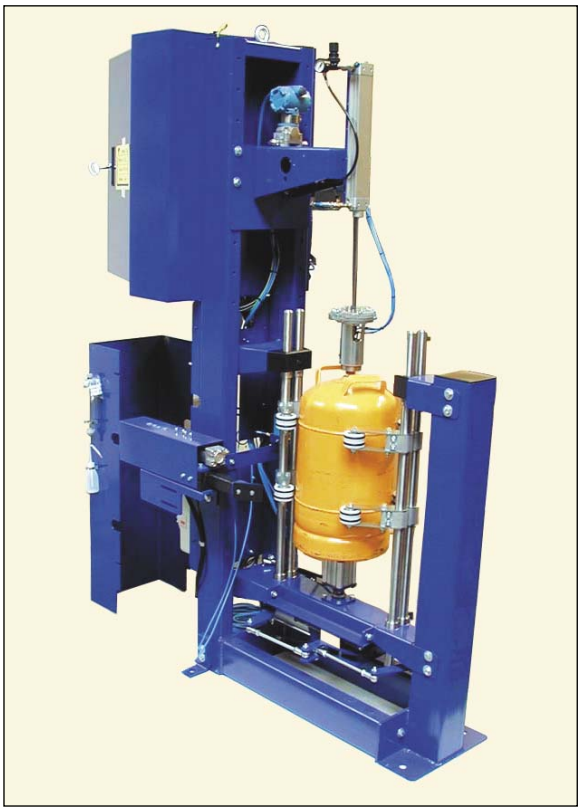

Fully automatic ET-PT leak detector

Electronic Leak Detectors

- Easy adjustment and maintenance
- Low power consumption
- Air service unit with extra filters to eliminate pollution in pneumatic air supply
- Minimum maintenance
- Easy to set up: all necessary software is installed in the HMI/CUC control unit
- Easy to use: clear text display and sturdy keyboard
- Ready for integration in fully automatic filling system
- Ready for communication with PC for data collection

Your possibilities

- Test heads designed for all types of valves
- Testing principle according to valve type and testing area on valve (gas analysis principle or pressure rise principle)
- Manually operated model for installation (1) stationary on floor, (2) in-line in chain conveyor or (3) in-line in roller conveyor. Available with gas analysis principle. Manually height adjustable
- Fully automatic model for installation in-line in chain conveyor. Performs leak test on all cylinders. Available with gas analysis principle or pressure rice principle. Manual change of test head for test of different valves. One- or two-headed machine. For one fixed cylinder height. Manually or automatically height adjustable
- Calibration and test equipment available on demand

Your safety


- All electronic leak detectors are EU approved and designed in accordance with current EU directives EN 50014, EN 50020, EN 50081, EN 50082, EN 55022, incl. the ATEX Directive (94/9/EC)
- All electronic leak detectors are designed for use in hazardous areas classified as Zone 1 according to IEC 79-10 and Class I, Division 1 according to NEC (USA), article 500
- National/local approvals



Manually operated ET-GD leak detector



Height adjustable, fully automatic, two-headed ET-GD leak detector

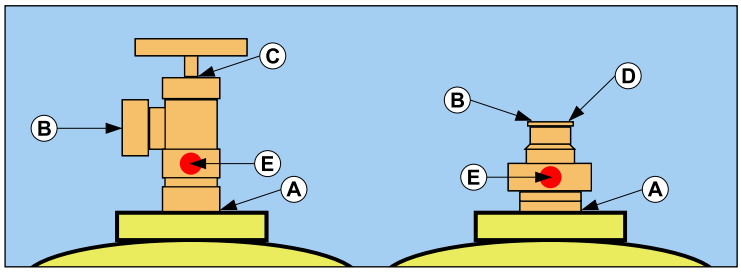

Testing areas for screw valves (POL valves):

A Leaks from the threaded joint between the cylinder and the valve
B Leaks from the valve seat (with closed valve)
C Leaks from the valve spindle (with open valve with nut/plug)
E Leaks from the safety valve (if any)

Testing areas for centre valves (self-closing valves):

A Leaks from the threaded joint between the cylinder and the valve
B Leaks from the valve seat
D Leaks from the gasket of the regulator
E Leaks from the safety valve (if any)