
**Crisplant a/s**

| | | |
|---|---|---|
| Pneumatic Filling Head | Type PI/PU | 1993/01 |
| Tête d'emplissage pneumatique | Type PI/PU | |
| Cabeza de llenado neumática | Tipo PI/PU | B012PIU/01 |
| Pneumatischer Abfüllanschluß | Typ PI/PU | |
| Pneumatisk fyldehoved | Type PI/PU | |



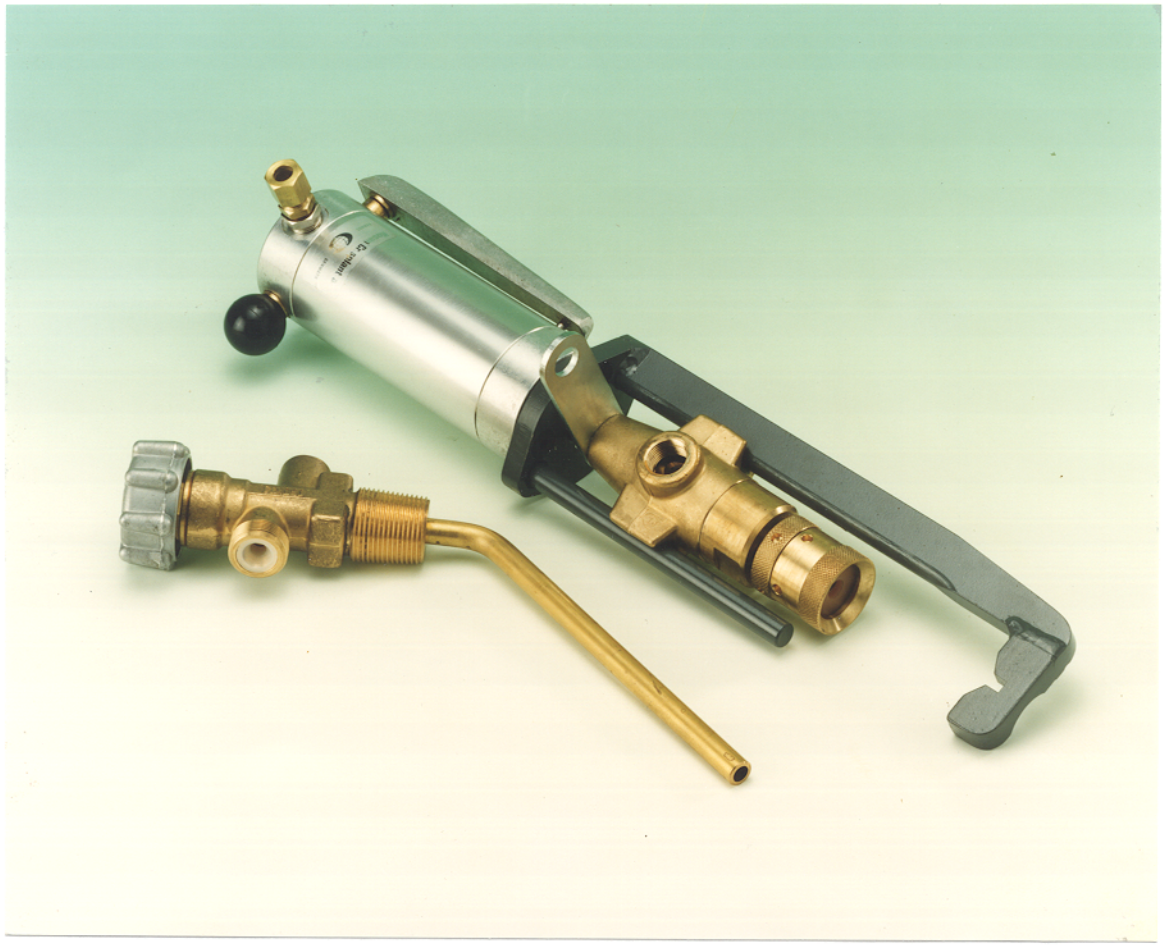

(B012PIU.F01)

## General Description

The pneumatic, manually operated filling head for screw valve, type PI/PU, has been designed for efficient and safe filling of LPG into cylinders with screw valves.

Since there are numerous screw valve types and LPG cylinders of different sizes and designs on the market, heavy demands are made on flexible designs of the components forming part of the filling head.

Crisplant's pneumatic filling heads for screw valves are always adapted to the relevant valve and cylinder type. It is often possible to use the same filling socket for all the relevant valve types of a particular customer, so that the use of several filling heads is avoided.

In the development of filling heads Crisplant have achieved a combination of high efficiency, long life, a minimum of maintenance and considerations of ergonomy, safety, and environment.

The filling head is easily operated by one hand by means of the built-in control valve. On Crisplant's filling machines the filling head is suspended balanced in a gallows, so that a minimum of forces is required for the operation. Moreover, the filling socket is secured so that it is not loosened from the valve in case of sudden compressed air failures. Furthermore, the filling head is constructed in such a way that the gas supply is cut off very close to the cylinder valve. Thereby the gas escape in connection with disconnection is minimized.

As an additional feature the filling socket is available in a version securing against large gas leakages in case of hose bursts.

## Variations in Design

- Filling sockets for valves with internal thread (**type PI**) and/or external connecting thread (**type PU**)
- Variation in the design of the clamp, depending on the shape of the valve and the cylinder collar
- Gas connection with hose burst protection
- Increased closing force



Specifications are subject to change without notice

## Scope of Supply

The filling head is supplied complete inclusive of gasket set, pressure-tested and ready for connection.

## Necessary Connections

- LPG installation
- Compressed air installation
- Earth net

## Additional Equipment (Only included if specified in quotation)

- Additional gasket set
- Overhaul kit

## Technical Data


| | |
|---|---|
| **Filling Media (standard)** | Propane and butane mixtures |
| **Approved Pressures** | • Working Pressure . . . . . < 21 bar<br>• Test Pressure . . . . . 40 bar |
| **Compressed Air** | • Minimum Pressure . . . . . 5 bar<br>Working air Pressure dew point: 10°C - Oil content: 0.008 g/m³<br>• Consumption:<br>0.9 NL/operation at 7 bar |
| **LPG Connection** | 3/8" BSP |
| **Compressed Air Connection** | ø8 mm |
| **Weight** | 2.2 kg |

NL = Normal Litre




Specifications are subject to change without notice

## Type PI

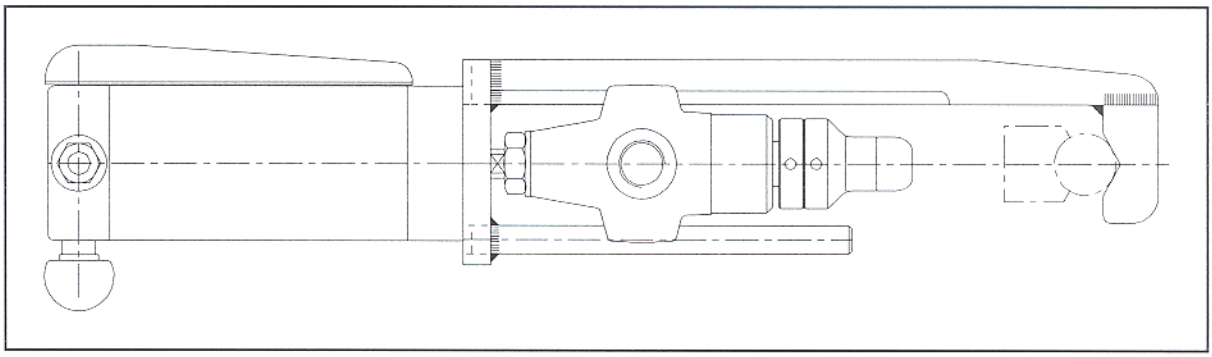

Manually operated **pneumatic** filling head for screw valves with **internal** thread

## Type PU

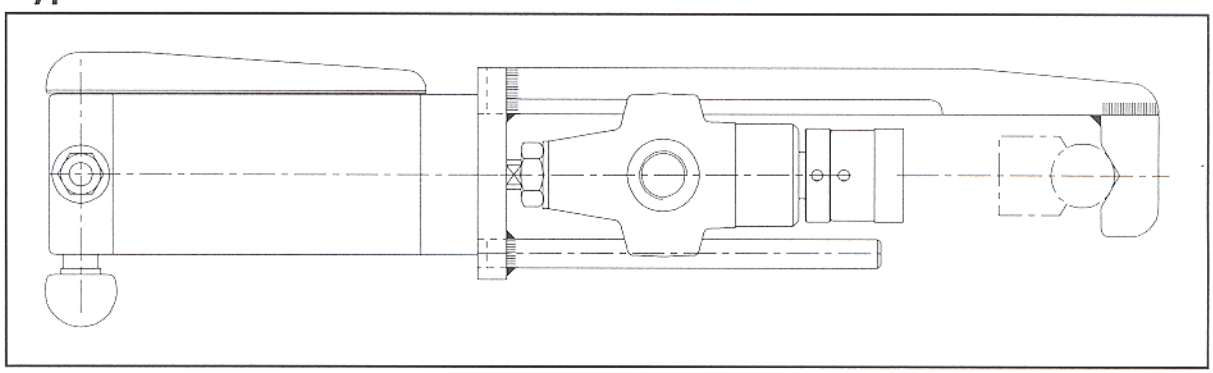

Manually operated **pneumatic** filling head for screw valves with **external** thread



Specifications are subject to change without notice