

Application examples and products

Level and pressure instrumentation for the offshore industry

VEGA HOME OF VALUES



Reliable


Reliable measurement unaffected by medium

Cost effective

Continuous operation of the power equipment is assured

User friendly

Simple installation

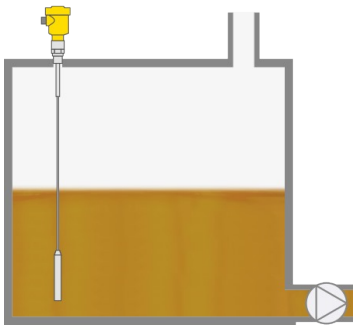

Hydraulic oil reservoir tank

Level measurement in the reservoir tank for hydraulic oil

The hydraulic oil used to transmit power circulates in a closed system. However, it is gradually lost due to lubrication points and leakages in the power equipment. To ensure optimum operation of the power equipment, the level in every hydraulic oil reservoir tank must be monitored for replenishment.

More details



VEGAFLEX 81

Level measurement with guided radar in the hydraulic oil reservoir tank

- Precise measurement, independent of media properties
- High measurement reliability even with buildup
- Simple setup and commissioning saves time

Show Product



Reliable


Reliable measurement for protection of personnel and equipment

Cost effective

Long service life thanks to the use of non-contact measurement method

User friendly

Simple mounting

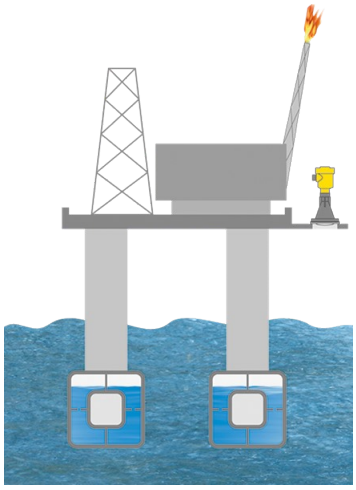

Wave and draught height

Wave height measurement for a drilling and production platform

The height of floating drilling or pumping assets like platforms or FPSOs must be precisely maintained, even in the roughest seas with waves up to 30 m high. Environmental influences such as wind and waves must be measured quickly and accurately, then evaluated with GPS navigation data. Furthermore, quick and exact measurement of wave heights is needed should there be an evacuation, where "freefall lifeboats" need to be released to meet waves at their highest point.

More details



VEGAPULS 6X

Measuring wave heights with non-contact radar

- Reliable measurement, independent of wind, temperature and fog
- Focussed 80 GHz beam and fast reaction for precision measurement
- Simple installation thanks to low weight of the sensors

Show Product



Reliable


High platform stability through reliable measurement

Cost effective

Long service life thanks to resistant materials

User friendly

Simple installation and maintenance-free operation

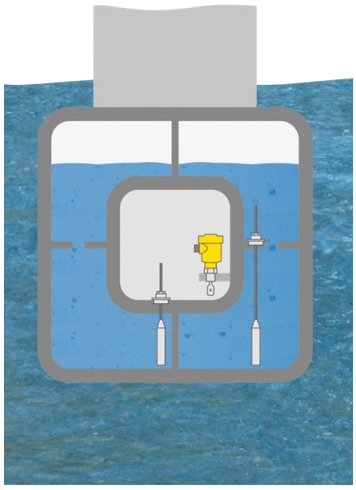

Ballast tanks

Level measurement and point level detection in the ballast tanks

Floating drilling or pumping assets such as platforms or FPSOs are stabilized by filling or emptying ballast tanks with seawater. This enables operators to critically and safely manage the ballast and trim of a vessel according to operational needs, deck loading and sea conditions. For trouble-free operation of the ballast system and the safety of personnel and equipment on board, reliable level measurement and point level detection are absolutely essential.

More details



VEGAWELL 52

Hydrostatic pressure transmitter for level measurement in the ballast tanks

- High measuring accuracy increases safety on board
- Reliable and durable measurement ensured through robust, seawater resistant construction of sensor
- Simple installation from above

Show Product



VEGASWING 61

Vibrating level switch for leakage detection in the ballast tanks

- High process reliability through SIL2 qualification
- Simple function test from the control room possible
- Maintenance-free operation

Show Product



Reliable


Measurement results are unaffected by process conditions

Cost effective

Efficient operation and high oil quality

User friendly

Maintenance-free operation

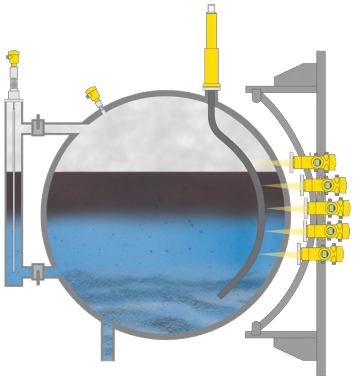

Oil separators

Level and pressure measurement in an oil separator

The separator vessel contains a mixture of crude oil, gas, water and sand extracted from the subsea well. Precise monitoring of these multiple separation interfaces and emulsions play a vital role in ensuring the quality of the oil separator for separation. Exact control of interfaces, level and pressure allows optimum utilization of the oil separator and increases the effectiveness of the entire asset.

More details



VEGAFLEX 86

Level measurement with guided radar in the oil separator

- Independent of medium density and therefore highly accurate
- Doubly secure thanks to the “Second Line of Defense”
- Shortenable rod probe allows high flexibility during planning

Show Product



VEGABAR 83

Pressure transmitter for monitoring pressure in the oil separator

- High plant availability due to high overload resistance
- High resistance of the measuring cell ensures a long service life
- Small process fitting reduces installation costs

Show Product



MINITRAC 31

Radiometric multi-phase interface measurement in the oil separator

- High process transparency through accurate detection of separation layers
- Ensures continuous operation of the facility through non-contact measuring method
- Measurement unaffected by pressure and temperature because sensor is installed outside of the tank

Show Product



Reliable

Secure sealing of the borehole

Cost effective

Ensures continuous bore head operation

User friendly

Wear and maintenance-free measurement

Mud tanks

Density measurement in mud tanks

Prior to, and during pumping into the well, the density of the mud needs continuous monitoring. Density is an important criteria for determining the correct composition of the drilling mud. The correct mud formulation ensures smooth forward propulsion, wear-free drilling and excellent sealing of the borehole is ensured through density monitoring.

More details





MINITRAC 31

Radiometric density measurement for monitoring of drilling mud density

- External, non-contact density measurement right through the pipeline
- Precise measuring results, independent of process conditions
- Maintenance and wear-free sensor ensures high plant availability

Show Product




VEGASOURCE 81

Source holder as receptacle for the radiation capsule

- High operational reliability with pneumatic actuation of the source holder
- Effective shielding allows minimal use of control areas
- Minimal space requirement and simple installation

Show Product

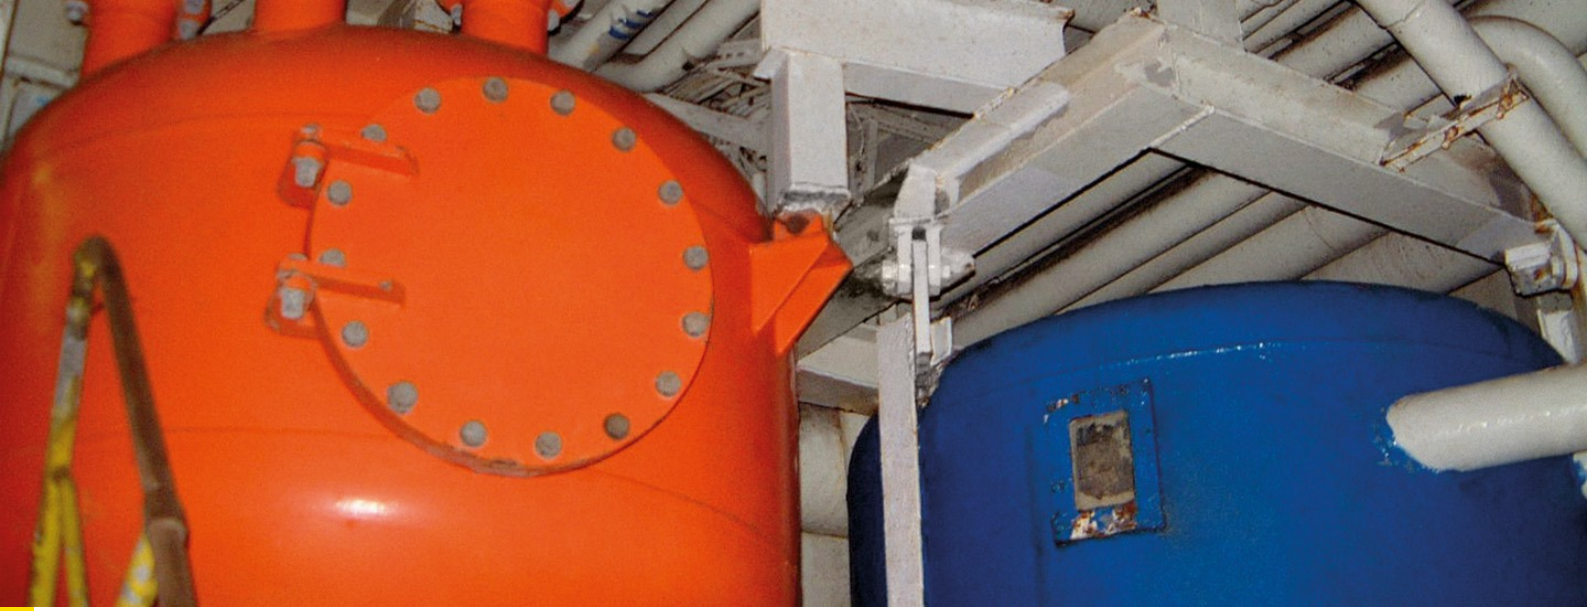

Reliable

Reliable measurement despite rough conditions

Cost effective

Maintenance-free operation even in adhesive media

User friendly

Simple installation thanks to small antenna systems

Mud tank level

Level measurement in mud tanks

In the mud tanks, agitators or jet nozzles stir and mix the mud to ensure a homogeneous mixture. To enable a continuous process, the level measurement must be reliable and independent of the composition of the drilling mud.

More details




VEGAPULS 6X

Non-contact level measurement with radar in mud tanks

- High measurement accuracy, independent of the properties of the medium
- Strong signal focusing ensures reliable measurement even with an agitator
- Continuous, maintenance-free operation despite heavy soiling

Show Product

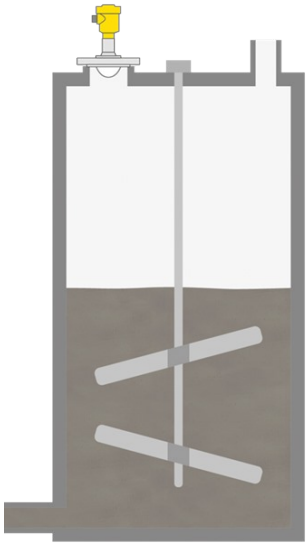



Reliable


Reliable measurement, independent of weather conditions

Cost effective

Effective utilization of the collecting tank

User friendly

Simple installation

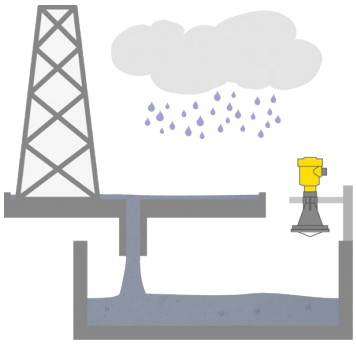

Wastewater sump (open drain)

Level measurement in rainwater collecting tanks

Rain run-off on board of oil platforms and ships is polluted with production residues and contaminants such as oil, sand and dirt. The rainwater with these contaminants must be collected in special tanks and properly disposed of. A reliable level measurement in the tank protects against overflow of the open drain removing the possibility of subsequent marine pollution.

More details



VEGAPULS 6X

Non-contact level measurement with radar in the rainwater collection tank

- Reliable measurement, independent of medium composition
- Maintenance-free operation, as sensor is non-sensitive to soiling
- High measuring accuracy despite wind and temperature fluctuations

Show Product



Reliable

Reliable measurement, independent of process conditions

Cost effective

Ensures an effective gas drying process, and thus high quality gas

User friendly

Maintenance-free operation

Gas separators (scrubbers)

Level and pressure measurement in the gas separator

Extracted natural gas and gas residues from oil production are contaminated with water and are therefore collected in gas separators (scrubbers) for separation. Pressures of up to +150 bar keep the gas in the liquid state. Exact pressure and level measurement enable optimal utilization of the gas separator and effective control of the gas drying process. The separation of gas from water is carried out by chemically binding the water to glycol and separating it mechanically. Accurate measurement of the gas/water interface determines the quality of the gas.

More details





VEGAFLEX 86

Interface measurement with guided radar in the gas separator

- Reliable measurement, independent of medium composition
- Doubly secure thanks to “Second Line of Defense"

Show Product



VEGABAR 81

Pressure transmitter for monitoring pressure in the gas separator

- Reliable measurement despite high pressure and large temperature ranges
- Wear and maintenance-free thanks to highly resistant diaphragm materials

Show Product



VEGAPULS 6X

Level measurement with radar in the gas separator

- Exact measuring results, independent of pressure, temperature and gas
- Maintenance-free operation thanks to non-contact measurement method
- Easy to install in the tank

Show Product



Reliable


Reliable measurement, independent of the process conditions

Cost effective

Ensures effective processing of the drilling mud

User friendly

Simple installation and setup from above

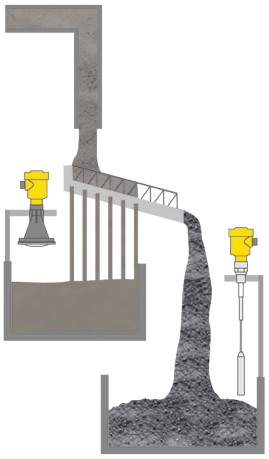

Shaker

Level measurement and point level detection in the shaker

Through the effects of strong vibration in the shaker, the liquid and solid components of the drilling mud returning from the borehole are separated from each other. The drilled rock and the sand are disposed of and the valuable drilling mud is fed back into the continuous drilling process. Level measurement and point level detection are absolutely necessary for effective processing of the drilling mud in the shaker.

More details



VEGAPULS 6X

Non-contact level measurement with radar in the shaker

- Accurate measurement, independent of media properties
- Reliable measurement, unaffected by vibration and buildup
- High equipment availability, as wear and maintenance-free

Show Product




VEGACAP 65

Capacitive level switch for point level detection in the shaker

- Long service life thanks to robust mechanical construction
- Reliable switching point ensured by large gravity weight
- Maintenance-free operation, as non-sensitive to soiling

Show Product

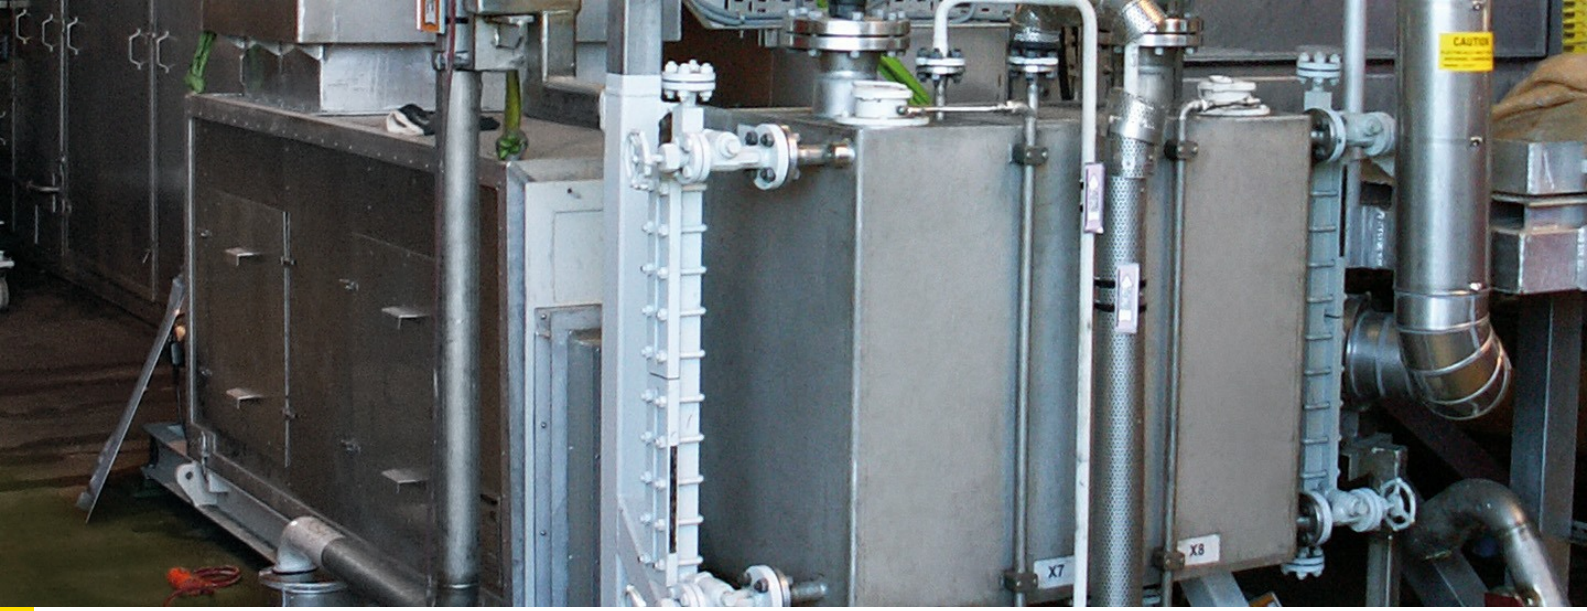

Reliable

Reliable measurement, independent of the characteristics of the drilling mud

Cost effective

Maintenance-free and accurate determination of mud usage

User friendly

Simple installation and setup



Trip tank

Level measurement in the trip tank

The drilling mud flowing back under high pressure from the drilling well is held and monitored in the trip tank. This drilling mud is contaminated with sea water, rocks and sand. In addition to materials like rocks and sand, residues of oil and gas are also present. The built-in level measuring system provides feedback about down-well conditions, basic data for comparing the quantity of drilling mud fed into the wellbore with that returned, as well as regulating mud production.

More details



VEGAPULS 6X

Level measurement with radar in the trip tank

- Reliable measurement ensured even with varying drilling mud composition
- Exact measuring results, independent of pressure, temperature and gas
- Maintenance-free operation thanks to non-contact measurement method

Show Product



Reliable


Precise measurement protects the drilling equipment

Cost effective

Continuous, wear-free operation

User friendly

Simple setup and commissioning



Mud flow return line

Drilling mud pipe flow measurement

The drilling mud flowing back from the drilling contains large amounts of solids. To avoid clogging in these pipes and the associated damage to the drill head and loss of production, a reliable monitoring of the entire mud return system is essential.

More details



VEGAPULS 62

Non-contact detection of clogging with radar in the mud flow return lines

- High measuring accuracy, independent of the physical properties of the drilling mud
- Mud flow uninterrupted, as sensor is installed outside the pipe
- Wear-free operation thanks to non-contact measuring method

Show Product



Reliable

Reliable measurement under rough conditions

Cost effective

Maintenance-free operation despite the presence of abrasive and adhesive products

User friendly

Simple installation and setup



Storage tank for solid raw materials

Level measurement and point level detection in the storage tank for solid raw materials

The solid raw materials such as gravel, clay, barite, cement and binders are essential for creating the different properties of the drilling mud. These materials are stored for mud production in storage tanks. To ensure optimal storage, reliable level measurement and point level detection are required.

More details



VEGAPULS 69

Level measurement with radar in the storage tank for solid raw materials

- Swivelling holder allows optimal sensor alignment
- High equipment availability, as wear and maintenance-free
- Reliable measurement, unaffected by dust and noise

Show Product



VEGACAP 65

Capacitive level switch prevents overfilling in the storage tank for solid raw materials

- Robust design ensures a long service life
- SIL2 qualification increases plant safety
- Easy on-site customization thanks to shortenable cable probe

Show Product



Reliable


Reliable measurement, independent of product characteristics

Cost effective

Maintenance-free operation

User friendly

Simple setup and commissioning

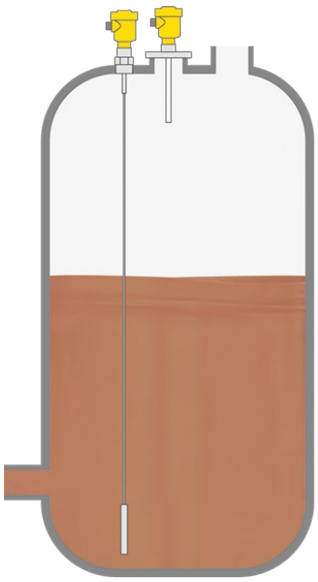

Storage tank for liquid raw materials

Level measurement and point level detection of liquid raw materials in storage tanks

Oils and alkaline solutions are among the liquid raw materials for the mud mixtures. These additives are stored on the drilling platform in special storage tanks. To ensure the continuous production of drilling mud, the level of raw materials in the storage tanks must be exactly monitored.

More details



VEGAFLEX 81

Level measurement with guided radar in storage tanks for liquid raw materials

- Simple project planning enabled by shortenable rod and cable probes
- Long service life thanks to highly resistant materials
- Non-sensitive to buildup and foam

Show Product



VEGASWING 63

Level switch for detecting the maximum level in the storage tank for liquid raw materials

- Reliable measurement, independent of mud characteristics
- Robust construction ensures a long service life
- Simple setup without adjustment

Show Product



Reliable

Reliable measurement, independent of process conditions

Cost effective

Ensures effective operation of the equipment

User friendly

Maintenance-free operation

Flare knockout drum

Level measurement in the flare knockout drum

The unrecoverable residues of oil and gas production are collected in the flare knockout drum and liquefied at high pressure. The recovered liquid, the condensate, collects at the bottom of the vessel and is disposed of. The non-liquefied gases are decompressed and burned in the flare system. To ensure efficient and safe operation of the vessel, the level inside must be very reliably measured.

More details




VEGAPULS 6X

Level measurement with radar in the flare knockout drum

- Exact measurement, independent of process conditions
- Maintenance-free thanks to non-contact measuring method
- Pressure and temperature stable antenna system of metal and ceramic with graphite seal

Show Product

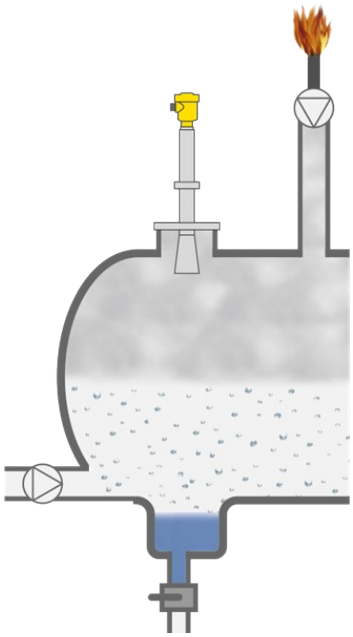



Reliable


High measuring precision, independent of process conditions

Cost effective

External mounting to the vessel, easily retrofitted

User friendly

Simple air and water calibration for fast commissioning time

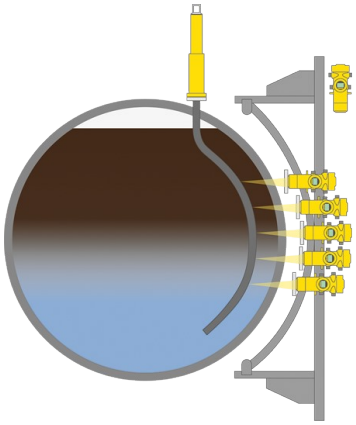

Primary desalter

Interface tracking in the primary desalter

It is important that a desalter unit runs efficiently to prevent corrosion to downstream equipment. When the crude oil mixes with the emulsifying chemicals and water, the resulting emulsion layer makes it difficult for standard level measurement technologies to reliably track the interface. Radiation-based measuring instruments are not affected by this and allow to track the interface even with thick emulsion layers present in the tank to make sure that the desalting process can be controlled efficiently at maximum throughput.

More details



MINITRAC 31

Multi-point density array for multi-phase interface and emulsion control

- Reliably tracks emulsion layer to keep the process stream efficient
- Optimises use of emulsifiers and other treatment chemicals
- Remains online even when replacing a detector to eliminate downtime
- Allows operator to maintain high throughput even when switching between light to heavy feedstock

Show Product



Reliable


Unaffected by changing crude density

Cost effective

Low maintenance costs

User friendly

Fast and easy setup

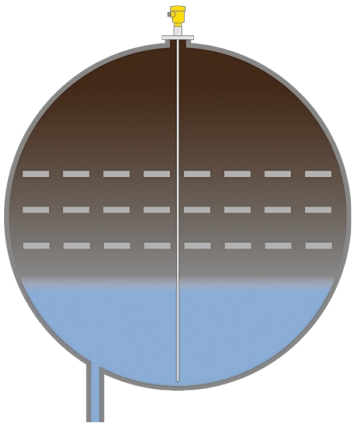

Secondary desalter

Interface measurement in the secondary desalter

To maximize efficiency of the electrostatic grid as it removes contaminants within second and third stage desalters, a crucial point of control is to maintain the oil and water interface just below this grid. Reliable measurement of this level protects the grid from shorting out on the water as well as increasing efficiency of the unit, which ensures the quality of the feed moving into the next process unit.

More details



VEGAFLEX 81

Guided wave radar sensor for continuous interface measurement

- Simple setup expedites installation
- Unaffected by viscous process properties
- Rigid rod probe prevents interference with electrostatic grid

Show Product

PRO

MINITRAC 31

Show Product



Radiometric sensor for density measurement

Measuring range - Distance
-

Process pressure
-

Accuracy
0.1 %

Materials, wetted parts
No wetted material

Seal material
no media contact

Housing material
Aluminium
Stainless steel (precision casting)

Protection rating
IP66/IP67

Output
Profibus PA
Foundation Fieldbus
Four-wire: 4 … 20 mA/HART

Ambient temperature
-40 ... 60 °C

PRO

VEGABAR 81

Show Product



Pressure transmitter with chemical seal

Measuring range - Distance
-

Measuring range - Pressure
-1 ... 1000 bar

Process temperature
-90 ... 400 °C

Process pressure
-1 ... 1000 bar

Accuracy
0.2 %
0.1 %

Materials, wetted parts
Alloy C22 (2.4602)
Alloy 400 (2.4360)
Tantalum
Alloy C276 (2.4819)
Duplex (1.4462)
Titanium Grade 2 (3.7035)
1.4435
316/316L
Titanium Grade 7 (3.7235)

Threaded connection
≥ G½, ≥ ½ NPT

Flange connection
≥ DN25, ≥ 1"

Hygenic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienice flange connection ≥ DN50 DIN11864-2
Hygienic fittings ≥ DN40 - DIN11864-1-A

Seal material
no media contact

PRO

VEGABAR 83

Show Product



Pressure transmitter with metallic measuring cell

Measuring range - Distance
-

Measuring range - Pressure
-1 ... 1000 bar

Process temperature
-40 ... 200 °C

Process pressure
-1 ... 1000 bar

Accuracy
0.075 %

Materials, wetted parts
316L
Alloy C22 (2.4602)
316Ti (1.4571)
Alloy C4 (2.4610)

Threaded connection
≥ G½, ≥ ½ NPT

Flange connection
≥ DN25, ≥ 1"

Hygenic fittings
Slotted nut ≥ DN25 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
Hygienice flange connection ≥ DN50 DIN11864-2
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN33 - DIN11864-1-A
Hyg. collar clamp adapter DN40PN40 DIN11864-3-A
Hyg. clamp connection DIN11864-3-A; DN50 Rohr ø53
Swagelok VCR screwing
Varivent G125

Seal material
no media contact

PRO

VEGACAP 65

Show Product



Capacitive cable probe for level detection

Measuring range - Distance

-

Process temperature

-50 ... 200 °C

Process pressure

-1 ... 64 bar

Version

Cable ø 6 mm with screening tube without weight
Cable ø 6 mm with screening tube and gravity weight
Cable ø 6 mm with gravity weight
Cable ø 8 mm with abrasion protection without weight
Cable ø 8 mm with abrasion protection and gravity weight
Cable ø 8 mm with gravity weight
PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts

PTFE
316L
PA
PEEK
Steel

Threaded connection

≥ G1, ≥ 1 NPT

Flange connection

≥ DN50, ≥ 2"

Housing material

Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating

IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

Output

Relay (DPDT)
Contactless electronic switch
Transistor (NPN/PNP)
Two-wire

PRO

VEGAFLEX 81

Show Product



TDR sensor for continuous level and interface measurement of liquids

Measuring range - Distance

75 m

Process temperature

-60 ... 200 °C

Process pressure

-1 ... 40 bar

Accuracy

± 2 mm

Version

Basic version for exchangeable cable ø 2; ø 4 mm
Basic version for exchangeable rod ø 8 mm
Basic version for exchangeable rod ø 12 mm
Coax version ø 21.3 mm for ammonia application
Coax version ø 21.3 mm with single hole
Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 8 mm
Exchangeable rod ø 12 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight
Exchangeable cable ø 4 mm without weight
exchangeable, PFA-coated cable ø4 mm with non-coated centering weight

Materials, wetted parts

PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
Alloy C276 (2.4819)
Duplex (1.4462)
304L

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN25, ≥ 1"

Seal material

EPDM
FKM
FFKM
Silicone FEP coated
Borosilicate glass

Housing material

Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

PRO

VEGAFLEX 86

Show Product



TDR sensor for continuous level and interface measurement of liquids

Measuring range - Distance

75 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 400 bar

Accuracy

± 2 mm

Version

Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with single hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 16 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight

Materials, wetted parts

316L
Alloy C22 (2.4602)
316

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN25, ≥ 1"

Seal material

FFKM
graphit and ceramic

Housing material

Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

PRO

VEGAPULS 62

Show Product



Radar sensor for continuous level measurement of liquids

Measuring range - Distance
35 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 2 mm

Frequency
26 GHz

Beam angle
≥ 3°

Version
for separate horn antenna
with ½" standpipe
with horn antenna ø 40 mm
with horn antenna ø 48 mm
with horn antenna ø 75 mm
with horn antenna ø 95 mm
with parabolic antenna ø 245 mm

Materials, wetted parts
316L
Alloy C22 (2.4602)
1.4848
Alloy 400 (2.4360)

Threaded connection
G1½, 1½ NPT

Flange connection
≥ DN50, ≥ 2"

PRO

VEGAPULS 69

Show Product



Radar sensor for continuous level measurement of liquids and bulk solids

Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygenic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A
Hygienice flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGAPULS 6X

Show Product



Radar sensor for continuous level measurement of liquids and bulk solids

Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygenic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A
Hygienice flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGASWING 61

Show Product



Vibrating level switch for liquids

Measuring range - Distance
-

Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Hygenic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A; DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

PRO

VEGASWING 63

Show Product



Vibrating level switch with tube extension for liquids

Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with tube extension
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Hygenic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A; DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65

PRO

VEGAWELL 52

Show Product



Submersible pressure transmitter with ceramic measuring cell

Measuring range - Pressure
0 ... 60 bar

Process temperature
-20 ... 80 °C

Process pressure
-

Accuracy
0.1 %


Materials, wetted parts
PVDF
316L
Duplex (1.4462)
FEP
PE
1.4301
Titanium

Seal material
EPDM
FKM
FFKM

Protection rating
IP66/IP67
IP68

Output
4 … 20 mA
Two-wire: 4 … 20 mA/HART

Ambient temperature
-40 ... 80 °C

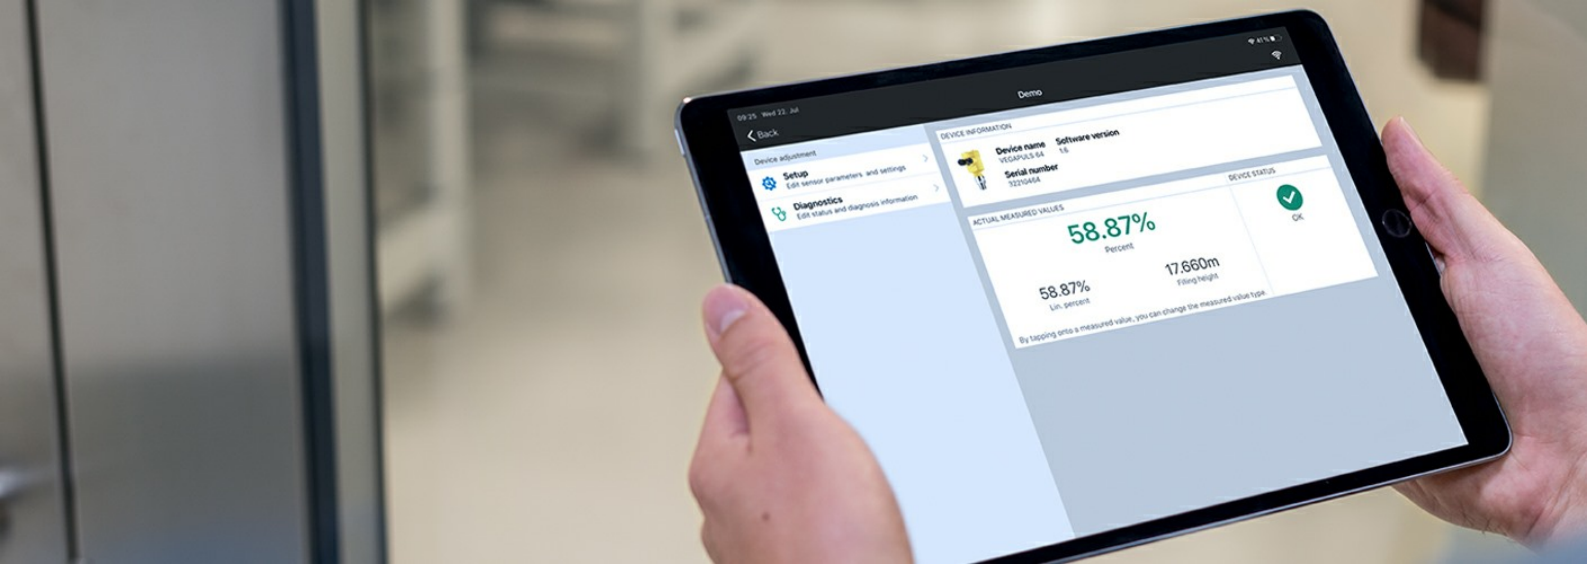


Interconnected solutions



Wireless operation

With Bluetooth, VEGA is looking far into the future. Wireless communication provides better accessibility: In harsh industrial environments, in hazardous areas, and in clean rooms. It allows setup, display and diagnostics from a distance of up to 50 metres, thus saving time and avoiding hazardous situations. Simply via VEGA Tools app – on any available smartphone or tablet.

Wireless operation




VEGA Inventory System

Simple but powerful visualization software coupled with high performance sensors provides a complete solution for remote monitoring.

- Access to live data anywhere on the internet via a web browser
- Gain detailed insights into your stock levels and consumption
- Optimize replenishment planning
- Never miss events with alerts and notifications
- Secure and reliable data

VEGA Inventory System

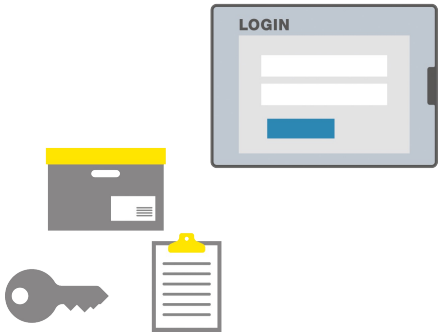

myVEGA

With myVEGA as your personal information platform you have access to many useful online functions relating to VEGA products.

- Configurator for the entire VEGA product range
- 2D/3D drawings of configured instruments
- Access to product data, operating instructions, certificates and software
- Manage offers and order data, and also track shipments
- Save, manage and synchronize access codes for VEGA sensors

myVEGA