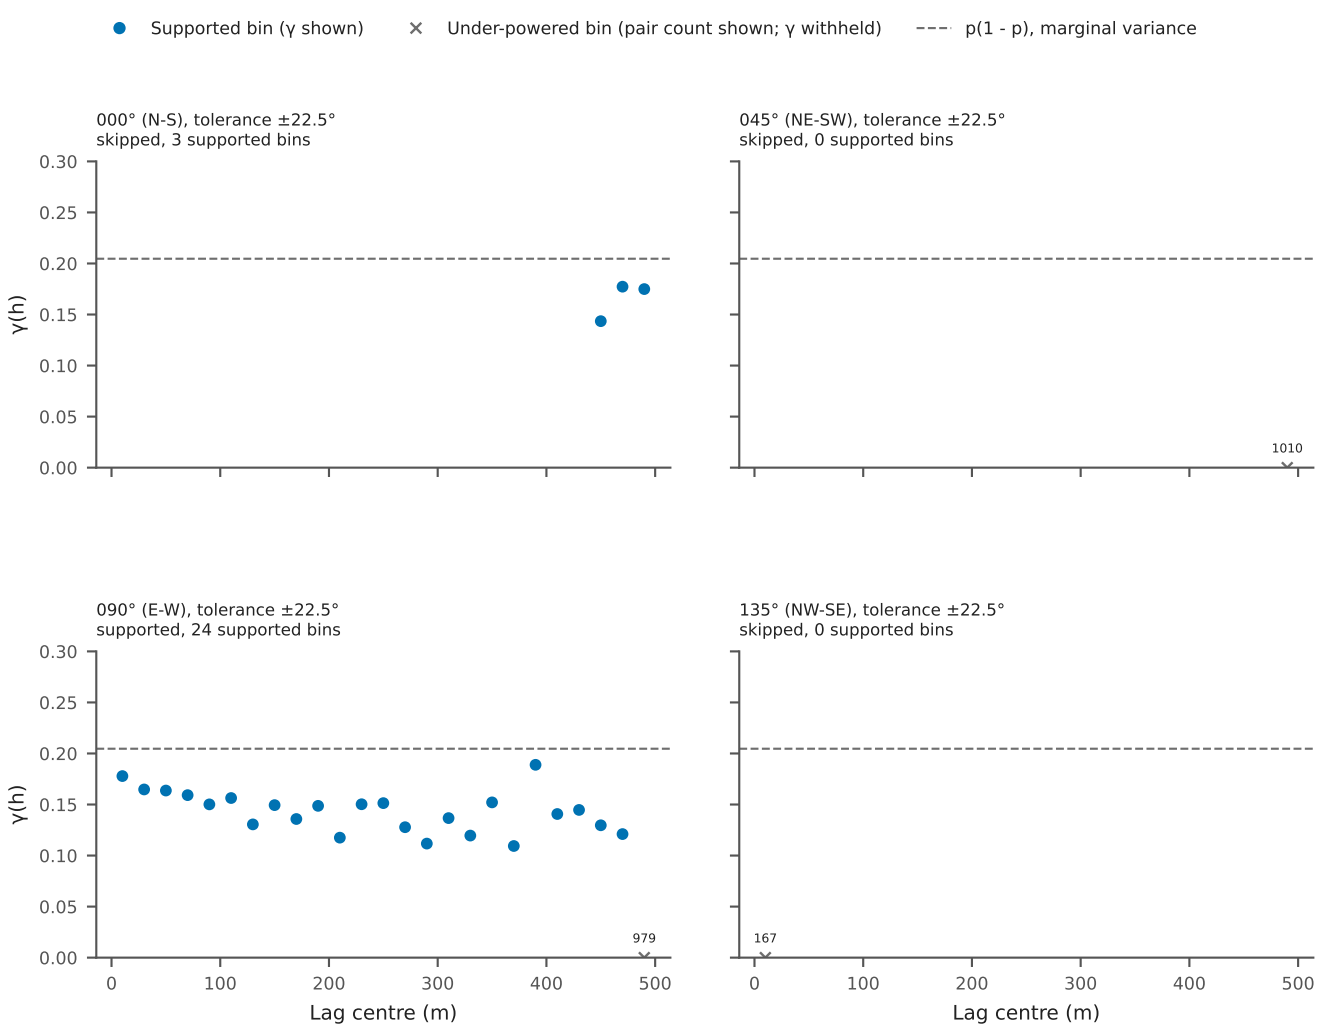
Supported bin (γ shown)
Under-powered bin (pair count shown; γ withheld)
p(1 - p), marginal variance
000° (N-S), tolerance ±22.5°
skipped, 3 supported bins
045° (NE-SW), tolerance ±22.5°
skipped, 0 supported bins
1010
090° (E-W), tolerance ±22.5°
supported, 24 supported bins
979
135° (NW-SE), tolerance ±22.5°
skipped, 0 supported bins
167
γ(h)
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0
100
200
300
400
500
Lag centre (m)