PAPER • OPEN ACCESS

The bicycle model of a 4WS car lateral dynamics for lane change controller

To cite this article: A Dbowski *et al* 2022 *IOP Conf. Ser.: Mater. Sci. Eng.* **1247** 012021

View the article online for updates and enhancements.

You may also like

- Experimental study on individual level interaction between bicycle and pedestrian
Qiao Wang, Juan Chen and Jian Ma
- Bicycle paths, elasticae and sub-Riemannian geometry
Andrei Ardentov, Gil Bor, Enrico Le Donne et al.
- Design of Intelligent Multi-layer Three-dimensional Bicycle Parking Garage
Chenglin Wang, Ye Jia, Lijun Zhao et al.

This content was downloaded from IP address 45.137.226.219 on 16/07/2022 at 18:04

The bicycle model of a 4WS car lateral dynamics for lane change controller

A Dębowski[1], J J Faryński[2, *] and D P Żardecki[1]

[1] Military University of Technology, Faculty of Mechanical Engineering, 00-908 Warsaw, Gen. Sylwestra Kaliskiego 2, Poland.
[2] Military University of Technology, Doctoral School, 00-908 Warsaw, Gen. Sylwestra Kaliskiego 2, Poland.

[*] jakub.farynski@wat.edu.pl

Abstract. The article shows the validity of four-wheel steering (4WS) bicycle model. At the beginning it is presented in which tasks, connected with 4WS vehicles, the bicycle model is applied. Then the equations in local coordinate system and their forms in global coordinate system are presented. The research tested the response of the model to a lane change manoeuvre, using transfer functions and a "bang-bang" control signal. The transfer functions was connected with static ratio characteristic to construct full four-wheel steering model. A reference signal generator and vehicle model were constructed in analytical form and checked in Matlab&Simulink using sample vehicle's data from another literature item. One example of simulations was shown. The results presented led to interesting conclusions and indicated directions for further research. This research will include the issue of regulators derivation. This will allow for the construction of a fully functioning control system. The effects of this activities will be tested again in simulation environment.

Keywords: road safety, infrastructure, automotive safety

1. Introduction

It was decided to take up the above topic of the article due to the authors' work on the topic of automatic control the lane change manoeuvre by a car with four steered wheels (4WS). The bicycle model of a 4WS car lateral dynamics is treated as the basic model for the synthesis of algorithms of the lane change controller. The idea behind this system was shown in the Figure 1.

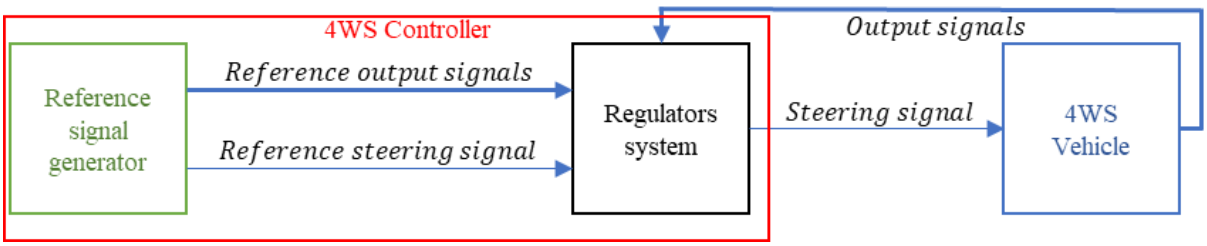

Figure 1. The idea of 4WS control system.

Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.
Published under licence by IOP Publishing Ltd

The proposed control system consists of a reference signal generator and regulators [5]. The reference signal generator is based on the lane change process reference model. It generates a reference steering signal and corresponding reference output signals. According to the theory of control systems and the practice of drivers [7], the reference steering signal has a form of “bang-bang” type signal. This signal is then corrected by regulators which work on the signal errors between reference and measured (in real car) output signals. The regulators correct the reference control signal so that, after correction, the actual control signal acting on the car ensures the minimization of errors, and finally a good implementation of lane change process. The algorithms of the regulators are also based on a reference model describing the lane change process. The reference model is therefore crucial for the design of the lane change controller. As shown in the literature analyzes, the bicycle model turned out to be the correct reference model used in many solutions of other authors.

The bicycle model is one of the models that forms the basis for considering the control concept in cars (2WS as well as 4WS), which can be seen from several publications in which this model appears together with other solutions. In papers [1], [9], [10] and [21] the bicycle model is used together with the MPC (Model Predictive Control) technique for the process of lane change. A wider spectrum has even devoted several review papers to the bicycle model: [5], [6], [8], [16] and [17]. It has also been used in, among other things: various computer simulations [2], real-world studies [3], in the study of variable vehicle dynamics [4], vehicle performance [12], active steering [15], comparison of 2WS and 4WS vehicle control [18] and control system design [20].

2. The “bicycle model” in ODE form

The bicycle model is a plane model with three degrees of freedom. It assumes that the vehicle's centre of mass is located on the plane of the road. The vehicle itself is symmetrical with respect to the longitudinal vertical plane. The axles are reduced to individual wheels. This model assumes that the left and right wheels of the vehicle generate the same lateral forces and depend only on the drift angle of the entire vehicle axis (Figure 2).

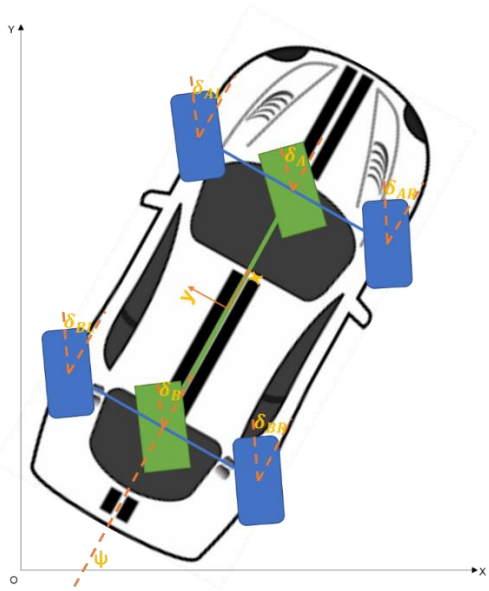

Figure 2. Idea of bicycle model.

Notation:

- (X, Y) – global coordinate system,
- (x, y) – local coordinate system,
- m – vehicle mass,
- J – mass moment of inertia (J_{zz} to p. C),
- $L_A,\ L_B$ – distances AC and BC between the center of mass to the front / rear axis,

- K_A, K_B – front and rear tyre cornering stiffness (yaw coeficcients to p. A and B),
- δ_A, δ_B – front and rear steering angles,
- Ω – angular velocity of the vehicle,
- V – longitudinal vehicle speed in the local coordinate system,
- U – lateral vehicle speed in the local coordinate system.

The considered issues concern the control of motion of a 4WS vehicle travelling at a steady speed on a straight, level road with good adhesion, so that the well-known "bicycle model" can be used to describe the dynamics. The vehicle is treated as a moving single mass planar object on elastic torsion pneumatics, symmetric about its longitudinal axis. The road reaction forces are perpendicular to the wheel rim side planes and depend directly (functional dependence) on the drift angles, so the angles between the wheel rim side planes and the wheel tyre line marks [11]. The road reaction forces are related to the points defined by the vertical projections of the wheel axis centres. Using the assumptions, one obtains ordinary differential equations (ODE) form:

$$m\dot{U}(t) + \frac{K_A+K_B}{V}U(t) + \frac{mV^2+K_AL_A-K_BL_B}{V}\Omega(t) = K_A\delta_A(t) + K_B\delta_B(t) \tag{1}$$

$$J\dot{\Omega}(t) + \frac{K_AL_A{}^2+K_BL_B{}^2}{V}\Omega(t) + \frac{K_AL_A-K_BL_B}{V}U(t) = K_AL_A\delta_A(t) - K_BL_B\delta_B(t) \tag{2}$$

$$X(t) = \int_0^t \dot{X}(\tau)d\tau = \int_0^t \big(V\cos(\psi(\tau)) - U(\tau)\sin(\psi(\tau))\big)d\tau \tag{3}$$

$$Y(t) = \int_0^t \dot{Y}(\tau)d\tau = \int_0^t (V\sin(\psi(\tau)) + U(\tau)\cos(\psi(\tau)))d\tau \tag{4}$$

$$\psi(t) = \int_0^t \Omega(\tau)d\tau \tag{5}$$

When $\psi(t)$ is small (for example during the lane change process) the linearisation of non-linear equations is possible and in this case equations (3), (4) obtain the linear form:

$$X(t) = \int_0^t \dot{X}(\tau)d\tau = Vt \tag{6}$$

$$Y(t) = \int_0^t \dot{Y}(\tau)d\tau = \int_0^t \big(V\psi(\tau) + U(\tau)\big)d\tau \tag{7}$$

3. Transmittance formulation of the model

The analysis of the 4WS bicycle model will be based on the research of the 4WS vehicle lane change process through a suddenly appearing obstacle [13] and [14]. The driver or controller during this manoeuvre generates a "bang-bang" signal (a jerk of the steering wheel, a hold, a jerk in the other direction, a hold and a return to the zero position) (Figure 3).

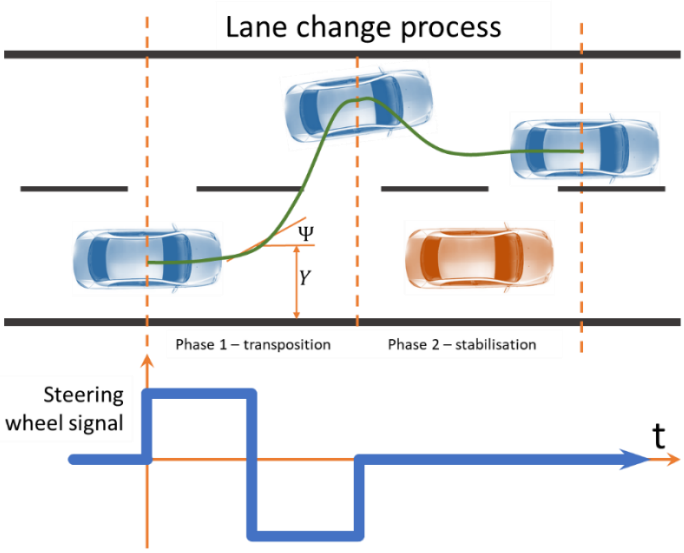

Figure 3. The concept of time decomposition of lane change control in 2WS vehicle [6].

After the equations have been linearised, they can be subjected to the Laplace transform and then the model was determined as a transfer function forms (Figure 4):

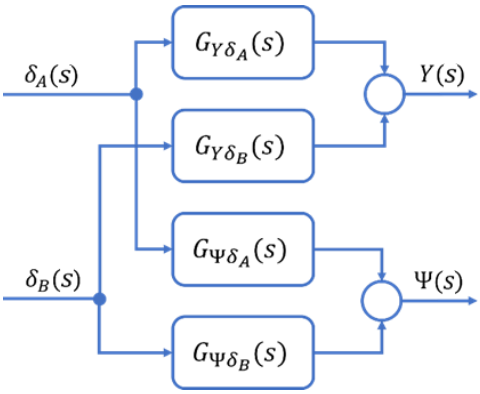

Figure 4. Model in transfer functions version.

$$G_{Y\delta_A}(s) = \frac{K_{Y\delta_A}\left(T_{Y\delta_A}^2 s^2 + 2\xi_{Y\delta_A} T_{Y\delta_A} s + 1\right)}{s^2(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \qquad G_{Y\delta_B}(s) = \frac{K_{Y\delta_B}(T_{Y\delta_B}^2 s^2 + 2\xi_{Y\delta_B} T_{Y\delta_B} s - 1)}{s^2(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \tag{8, 9}$$

$$G_{\psi\delta_A}(s) = \frac{K_{\psi\delta_A}(T_{\psi\delta_A} s + 1)}{s(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \qquad G_{\psi\delta_B}(s) = \frac{K_{\psi\delta_B}\left(T_{\psi\delta_B} s + 1\right)}{s(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \tag{10, 11}$$

where:

$$K_{Y\delta_A} = K_{Y\delta_B} = VK_0 \quad K_{\psi\delta_A} = K_0 \quad K_{\psi\delta_B} = -K_0 \quad K_0 = \frac{K_A K_B (L_A + L_B) V}{K_A K_B (L_A + L_B)^2 - mV^2 (K_A L_A - K_B L_B)} \tag{12-15}$$

$$T_0 = V\sqrt{\frac{mJ}{K_A K_B (L_A + L_B)^2 - mV^2 (K_A L_A - K_B L_B)}} \qquad \xi_0 = \frac{m(K_A {L_A}^2 + K_B {L_B}^2) + J(K_A + K_B)}{2\sqrt{mJ(K_A K_B (L_A + L_B)^2 - mV^2 (K_A L_A - K_B L_B))}} \tag{16, 17}$$

$$T_{\psi\delta_A} = \frac{mL_A V}{K_B (L_A + L_B)} \quad T_{\psi\delta_B} = \frac{mL_B V}{K_A (L_A + L_B)} \quad T_{Y\delta_A} = \sqrt{\frac{J}{K_B (L_A + L_B)}} \quad T_{Y\delta_B} = \sqrt{\frac{J}{K_A (L_A + L_B)}} \tag{18-21}$$

$$\xi_{Y\delta_A} = \frac{L_B}{2V}\sqrt{\frac{K_B (L_A + L_B)}{J}} \qquad \xi_{Y\delta_B} = \frac{L_A}{2V}\sqrt{\frac{K_A (L_A + L_B)}{J}} \tag{22, 23}$$

The above representation of the transfer functions show a very strong connection between the transfer functions parameters and the mechanical parameters. The transfer functions show the essence of the effects of steering angles on lateral and angular displacements.

In classic 4WS controls, the rear wheels are controlled by transforming the front wheel control accordingly (Figure 5).

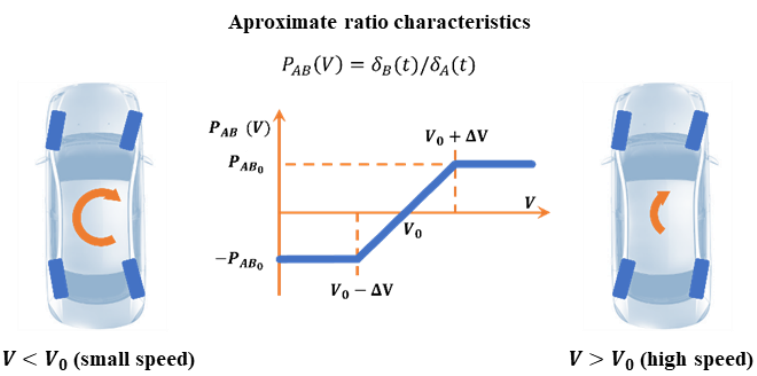

Figure 5. Overall idea of steering front and rear wheels in 4WS vehicles.
Notation: P_{AB} – gear ratio between front and rear wheel twist angles (δ_A, δ_B)
V – vehicle speed, V_0 – characteristic speed when δ_B=0.

With the assumed ratio characteristics, the transfer functions model appears as follows (Figure 6):

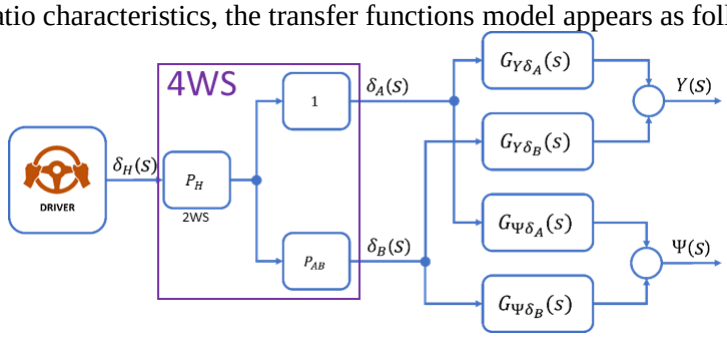

Figure 6. Model including rear wheel ratio.

$$Y(s) = G_{Y\delta}(s)\delta(s) \quad \text{where} \quad G_{Y\delta}(s) = G_{Y\delta_A}(s) + P_{AB}(V)G_{Y\delta_B}(s) \tag{24, 25}$$

$$\psi(s) = G_{\psi\delta}(s)\delta(s) \quad \text{where} \quad G_{\psi\delta}(s) = G_{\psi\delta_A}(s) + P_{AB}(V)G_{\psi\delta_B}(s) \tag{26, 27}$$

$$\text{from: } G_{Y\delta}(s) = \frac{K_{Y\delta}(T_Y^2 s^2 + 2\xi_{Y\delta}T_{Y\delta}s + 1)}{s^2(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \qquad G_{\psi\delta}(s) = \frac{K_{\psi\delta}(T_{\psi\delta}s + 1)}{s(T_0^2 s^2 + 2\xi_0 T_0 s + 1)} \tag{28, 29}$$

where:

$$K_{Y\delta} = (1 - P_{AB}(V))VK_0 \qquad T_{Y\delta} = \sqrt{\frac{J\left(\frac{1}{K_B} + \frac{P_{AB}(V)}{K_A}\right)}{(L_A + L_B)(1 - P_{AB}(V))}} \qquad \xi_{Y\delta} = \frac{L_B + P_{AB}(V)L_A}{2V(1 - P_{AB}(V))\sqrt{\frac{J\left(\frac{1}{K_B} + \frac{P_{AB}(V)}{K_A}\right)}{(L_A + L_B)(1 - P_{AB}(V))}}} \tag{30-32}$$

$$K_{\psi\delta} = (1 - P_{AB}(V))K_0 \qquad T_{\psi\delta} = \frac{mV\left(\frac{L_A}{K_B} - P_{AB}(V)\frac{L_B}{K_A}\right)}{(L_A + L_B)(1 - P_{AB}(V))} \tag{33, 34}$$

4. Theoretical and simulation based on analyses

The next step is determine and analyse the limes of the transfer functions. In particular, the "bang-bang" input waveforms (Figure 7) should be considered, as they approximate the real waveforms during lane change process.

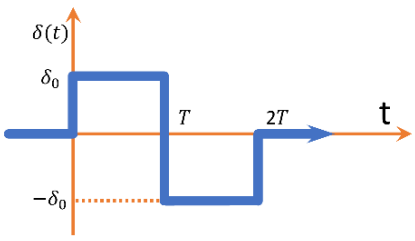

Figure 7. "Bang-bang" signal.

$$\delta(t) = \delta_0(1(t) - 2 \cdot 1(t - T) + 1(t - 2T) \qquad \delta(s) = \delta_0 \frac{(1 - e^{-sT})^2}{s} \tag{35, 36}$$

$$\delta_A(t) = \delta(t), \quad when \quad \delta_B(t) = P_{AB}(V)\delta(t) \qquad P_{AB}(V) > 0 \tag{37-39}$$

$$\lim_{t\to\infty}(\psi(t)) = \lim_{s\to 0}(s\psi(s)) = \lim_{s\to 0}\left(s(G_{\psi\delta_A}(s)\delta_A(s) + G_{\psi\delta_B}(s)\delta_B(s)\right) = 0 \tag{40}$$

$$\lim_{t\to\infty}(Y(t)) = \lim_{s\to 0}(sY(s)) = \lim_{s\to 0}\left(s\left(G_{Y\delta_A}(s)\delta_A(s) + G_{Y\delta_B}(s)\delta_B(s)\right)\right) = (1 - P_{AB}(V))\delta_0 T^2 VK_0 \tag{41}$$

It was decided to use also the model in a reduced version (members affecting only the transients are omitted), as this enables an analytical synthesis of the control of classical 4WS vehicles.

$$G_{Y\delta_R}(s) = \frac{K_{Y\delta}}{s^2} \qquad G_{\psi\delta_R}(s) = \frac{K_{\psi\delta}}{s} \tag{42, 43}$$

The same results of the boundary analysis are also obtained assuming a reduction of the initial transfer functions model. The limit defined by equation (39) is the steady-state displacement value Y_0, also the magnitude of the lane change. It should be noted here that theoretically, according to formula (40), the steady-state yaw angle is zero, so the vehicle moves on a track parallel to the original track. However, equations (40) and (41) are not sufficient to determine the signal parameters δ_0 and T. Therefore, an analogous study was performed here by updating the state after step excitation at time $t = T$ using (43). In this case, the angular displacement $\psi(T) = \psi_0$ reaches the maximum value ψ_0 defining the assumed linearity of the model. Based on these analyses, formulas for the values of T i δ_0 can be calculated (Figure 8):

$$T = \frac{Y_0}{V\psi_0} \qquad \delta_0 = \frac{V\psi_0^2}{K_{\psi\delta}Y_0} \tag{44, 45}$$

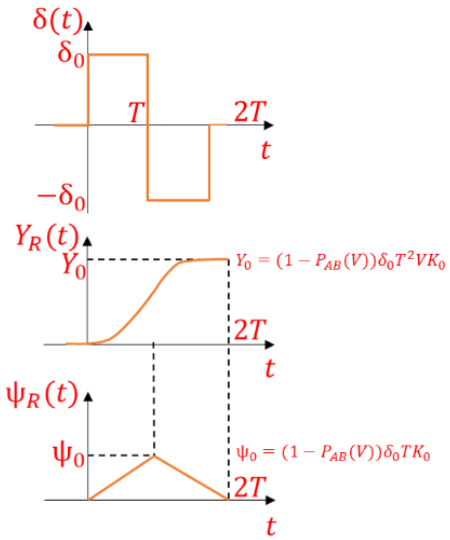

Figure 8. Reference signals in the control system.

The form of the individual elements for the control process must be defined at the outset in the planned control concept. This mainly concerns the form of the reference signal generator and the vehicle, which will generate the real signals on the basis of the reference signals. In the feedback loop, so-called failures will arise as a result of the interaction of the vehicle's individual parameters with the prevailing traffic situation. In order to check the operation of the analysed reference signal generator and 4WS vehicle, it was implemented into the Matlab&Simulink program. As a result of not having an real 4WS vehicle, this paper uses vehicle's data from the article [22] (Table 1).

Table 1. Vehicle's data.

Parameter	Unit	Value
m	$[kg]$	1740
J	$[kg \cdot m^2]$	3048
L_A	$[m]$	1,035
L_B	$[m]$	1,655
K_A	$[N/rad]$	35000
K_B	$[N/rad]$	37500
V_0	$[m/s]$	15
ΔV	$[m/s]$	5
$P_{AB\,0}$	$[-]$	0,1
Y_0	$[m]$	2
ψ_0	$[rad]$	0,11

The tests were carried out for several speed variants V with process time $t = 10\ s$ to check the functionality of the system. The graphs show reference (green color) and real (blue color) values. Example simulation result is presented in Figure 9.

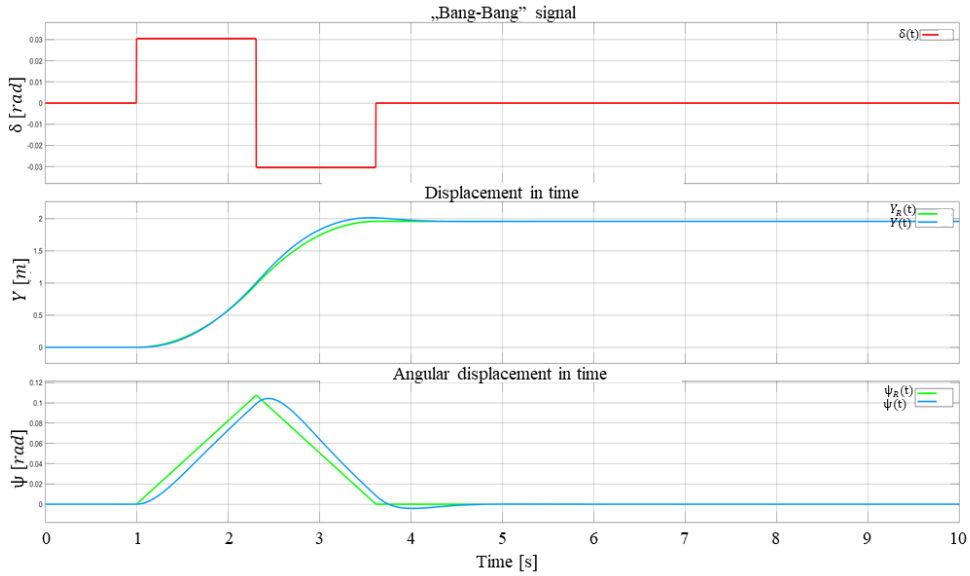

Figure 9. The result of simulation for $V = 50\ km/h$.

As a result of the simulations carried out, it can be seen what role the extended and reduced transfer functions have. Simulations were repeated for many different sets of data (not presented here). They had shown the sensitivity of the model, but in every cases the errors between the results of reduced and extended forms of transfer functions model were not high.

5. Conclusions

This study shows how important and significant role the bicycle model plays in the overall control concept of the 4WS cars. The linearisation of the model and its subsequent presentation in the form of operator calculus allowed the derivation of transfer functions, which greatly facilitated the process of analysing the model in terms of lane changes. Appropriate use of the "bang-bang" signal and a reduced model with the application of limes let to make reference signal generator. The bicycle model in reduced form can be used for analytical synthesis of the regulation system, which correct the reference steering signal The proposed model in extended as well as in reduced form seems to be good proposition for synthesis and analyses the lane change control system algorithms for 4WS vehicles. The simulations, which were carried out, had shown that constructed model works as theoretical. This simulations show very well the effect of transition parameters on model. Graphs of extended transfer functions are not as ideal as graphs of reduced transfer functions. It is possible to construct fully regulation system. The next step for further research is to derivate regulators to proposed system on Figure 1. Everything will be checked again in Matlab&Simulink system for verification sensitivity of the model for different vehicles' data.

6. References

[1] Ahmadi B., *Design a Reliable Model Predictive Control for Path Following with Application to the Autonomous Vehicle and Considering Different Vehicle Models*, Waterloo: University of Waterloo, 2021, pp. 13-43.

[2] Bilen Ö. B., *Path Control Algorithms for Autonomous Steering and Braking of Heavy Vehicles*, Göteborg: Chalmers University of Technology, 2010, pp. 10-52.

[3] Bin Ramil A. S., *Study on Influences of Rear-Wheel Turn Angle to Performance of Four Wheel Steering (4WS) Vehicle*, Tronoh: Universiti Teknologi PETRONAS, 2010, pp. 26-41.

[4] Fahimi F., "Full drive-by-wire dynamic control for four-wheel-steer all-wheel-drive vehicles," *Vehicle System Dynamics,* vol. 51, no. 3, pp. 360-376, 2013.

[5] Faryński J. J., Żardecki D. P., Dębowski A., "Study of the problem and the idea of operation of four-wheel-steering cars," *The Archives of Automotive Engineering - Archiwum Motoryzacji,* vol. 94, no. 4, pp. 39-59, 2021.

[6] Faryński J. J., Dębowski A., Żardecki D. P., "Wstępne studium problematyki sterowania w samochodach 4WS," *Biuletyn Wojskowej Akademii Technicznej,* vol. 69, no. 4, pp. 95-113, 2020.

[7] Frej D., Grabski P., Szumska E., "The Importance of Alternative Drive Vehicles in Road Transport in Poland and the European Union," *LOGI - Scienetific Journal on Transport and Logistics,* vol. 12, no. 1, pp. 67-77, 2021.

[8] Furukawa Y., Yuhara N., Sano S., Takeda H., Matsushita Y., "A Review of Four-Wheel Steering Studies from the Viewpoint of Vehicle Dynamics and Control," *Vehicle System Dynamics: International Journal of Vehicle Mechanics and Mobility,* vol. 18, no. 1-3, pp. 151-186, 1989.

[9] Gidlewski M., Jemioł L., Żardecki D. P., "Badania symulacyjne dynamiki procesu nagłego omijania przeszkody przez samochód," *The Archives of Automotive Engineering – Archiwum Motoryzacji,* vol. 73, no. 3, pp. 31-46, 2016.

[10] Gidlewski M., Jankowski K., Muszyński A., Żardecki D. P., "Vehicle Lane Change Automation with Active Steering - Theoretical Studies and Numerical Investigations," *Society of Atomotive Engineers International,* vol. 1555, pp. 1-11, 2017.

[11] Hryciów Z., Jackowski J., Żmuda M., "The Influence of Non-Pneumatic Tyre Structure on its Operational Properties," *International Journal of Automotive and Mechanical Engineering,* vol. 17, no. 3, pp. 8168-8178, 2020.

[12] Owen E. D., *The Benefits of Four-Wheel Drive for a High-Performance FSAE Electric Racecar,* Cambridge: Massachusetts Institute of Technology, 2018, pp. 21-64.

[13] Prochowski L., Pusty T., Gidlewski M., Jemioł L., "Experimental studies of the car-trailer system when passing by a suddenly appearing obstacle in aspect of active safety of autonomous vehicles," in *IOP Conference Series: Materials Science and Engineering,* 2018.

[14] Prochowski L., Ziubiński M., Szwajkowski P., Mirosław G., Pusty T., Stańczyk T. L., "Impact of control system model parameters on the obstacle avoidance by an autonomous car-trailer unit: Research results," *Energies,* vol. 14, no. 10, pp. 1-31, 2021.

[15] Scalzi S., *Integrated Control of Active Steering and Electronic Differentials in Four Wheel Drive and Steering Vehicles,* Rzym: University of Rome Tor Vergata, 2009, pp. 44-118.

[16] Spentzas K., Alkhazali I., Demic M., "Dynamics of four-wheel-steering vehicles," *Springer-Verlag,* vol. 66, pp. 260-266, 2001.

[17] Spentzas K., Alkhazali I., Demic M., "Kinematics of four-wheel-steering vehicles," *Springer-Verlag,* vol. 66, pp. 211-216, 2001.

[18] Tourajizadeh H., Sarvari M., Ordoo A. S., "Modeling and Optimal Control of 4 Wheel Steering Vehicle Using LQR and its Comparison with 2 Wheel Steering Vehicle," *International Journal of Robotics,* vol. 9, no. 1, pp. 20-32, 2020.

[19] Weigel-Milleret K., *Wpływ regulacji sił napędowych na stabilność ruchu wąskich pojazdów czterokołowych,* Kraków: Politechnika Krakowska, 2019, pp. 17, 23.

[20] Xia Y., Lin M., Zhang J., Fu M., Li C., Li S., Yang Y., "Trajectory planning and tracking for four-wheel steering vehicle based on differential flatness and active disturbance rejection controller," *International Journal of Adaptive Control and Signal Processing,* vol. 35, no. 11, pp. 2214-2244, 2021.

[21] Yakub F., Abu A., Sarip A., Mori Y., "Study of Model Predictive Control for Path-Following Autonomous Ground Vehicle Control under Crosswind Effect," *Journal of Dynamics Systems, Measurement and Control,* vol. 133, pp. 1-6, 2011.

[22] Yin G.-D., Chen N., Wang J.-X., Wu L.-Y., "A Study on μ-Synthesis Control for Four-Wheel Steering System to Enhance Vehicle Lateral Stability," *Journal of Dynamics Systems, Measurement and Control,* vol. 133, pp. 1-6, 2011.