

Precision DC Load Testing — Engineered for the Field

3,000 kW DC Stationary Load Bank

WHY THE A3000 DC?

Service and rental grade DC testing at multi-megawatt scale. The A3000DC is the new standard in stationary resistive load banks. It delivers a full 3,000 kW at either 500 VDC or 1,000 VDC in a skid-based outdoor enclosure built for continuous duty. Perfect for data-center DC bus commissioning, BESS discharge, UPS validation, and high-capacity rental fleets.

KEY BENEFITS

- 3,000 kW continuous at 500 VDC or 1,000 VDC
- 3,000 A @ 1,000 VDC / 6,000 A @ 500 VDC
- 25 kW load-step resolution as standard
- PLC + color touchscreen HMI with kW Select, Load On/Apply/Drop, and Load Profile
- Network up to 24 load banks from a single HMI; LoadEZ remote software
- Vertical air discharge through gravity louvers — three industrial blowers
- NEMA 3R outdoor enclosure on a common skid with fork pockets and lift eyes
- USB/Ethernet for data logging, firmware, and remote operation
- Physical E-Stop plus over-temp, air-fail, over-voltage, and voltage-range protection

CONTROL & COOLING POWER

- Internal via integral control-power transformer, or
- External 480 V, 3-phase, 60 Hz source
- Control and blower circuits fuse- and breaker-protected



A3000DC outdoor stationary load bank

IDEAL FOR


- Data-center DC bus & UPS commissioning
- Battery energy storage (BESS) discharge
- High-voltage DC plant and rectifier testing
- Manufacturing and industrial DC systems
- Service, commissioning, and rental fleets

COOLING SYSTEM

- Vertical hot-air discharge through gravity louvers
- Sized for continuous outdoor heat rejection

Rating (kW)	Voltage (VDC)	Current (A)	Resistance (Ω)	Min. step (kW)
3000	500	6000	0.083	25
1080	600	1800	0.333	25
1470	700	2100	0.333	25
1920	800	2400	0.333	25
2430	900	2700	0.333	25
3000	1000	3000	0.333	25

Table 1: A3000 Load Bank - Technical Values (derated)

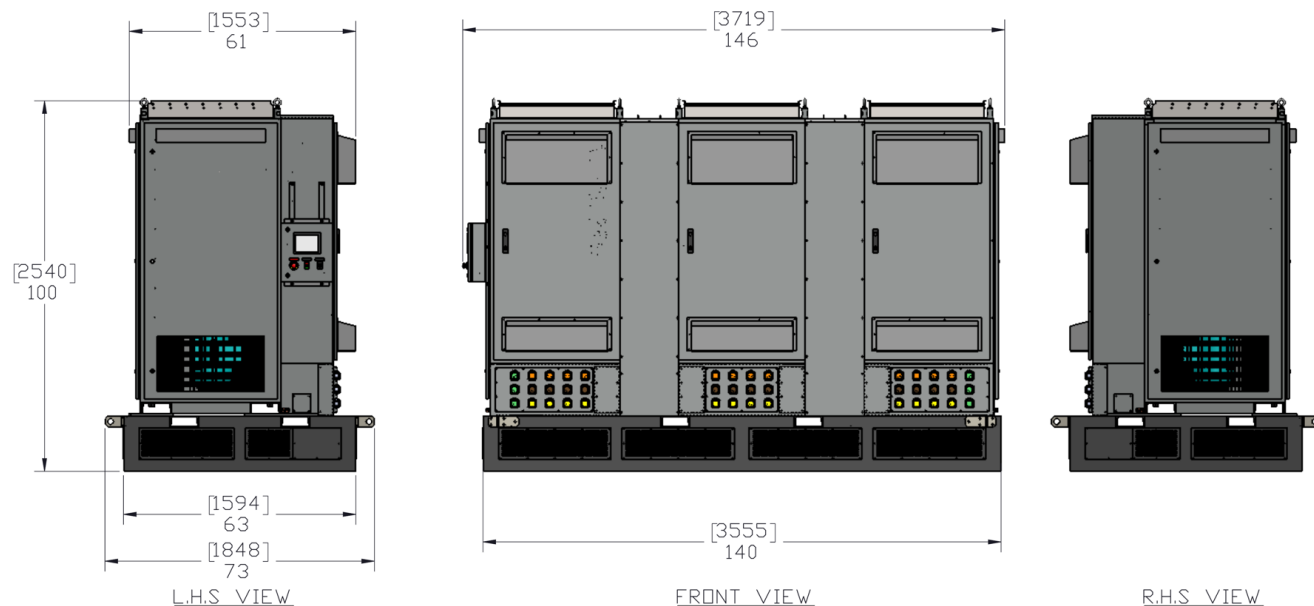

Left / front / right — 61 W × 146 L × 100 H in

CONSTRUCTION

- Designed for permanent outdoor use
- Heavy-gauge aluminum or steel enclosure
- RAL 7042 matt polyester powder coat
- Hinged storage / access doors with latches
- Internal bus connections with standard NEMA hole patterns
- Common base with fork pockets and lifting eyes

SYSTEM DIGITAL CONTROLS

Integral PLC and color touchscreen HMI with real-time volt, amp, and kW monitoring.

HMI screens: Power Safety, Screen Capture, Data Logging, Maintenance.

Load controls: kW Select, Load On, Load Apply, Load Drop, Load Profile (up to 10 steps).

Network up to 24 load banks from one HMI. USB and Ethernet for logging, firmware, and remote operation through LoadEZ.

DIMENSIONS & WEIGHT

Envelope	146 L × 61 W × 100 H in (3,719 × 1,553 × 2,540 mm)
Weight (approx.)	7,200 lb / 3,266 kg
Handling	Fork pockets and lifting eyes on common skid base