
Continuous Distillation

Experiment IV

AMRITA GOSWAMI (17102261)



Submitted To:

Prof Naveen Tiwari

Course Instructor

August 20, 2018

Contents

Continuous Distillation	3
Objective	3
Apparatus Required	3
Theory	4
Assumptions	5
External Reflux Ratio	5
Rectifying Section	6
Stripping Section	8
Feed Conditions	9
Procedure	10
Line Diagram	11
Tables and Graphs	11
Calculations	17
Calibration Curve	18
Feed Line Equation	18
Total Reflux Condition	19
Partial Reflux Condition	20
Results and Discussion	23
Conclusions	24
References	25

List of Tables

0.1	Possible Feed Conditions and Corresponding q Values.	9
0.2	Calibration Curve Data	13
0.3	Vapor Liquid Equilibrium Data	15

List of Figures

0.1	Distillation Operation Using a Total Condenser and Partial Reboiler	4
-----	-------------------------------------------------------------------------------	---

0.2	Rectifying Section	6
0.3	Stripping Section	8
0.4	Lab Setup	11
0.5	Observation Table	12
0.6	Calibration Curve from Refractive Index Data	14
0.7	Calibration Curve from Specific Gravity Data	14
0.8	Total Reflux	16
0.9	Partial Reflux	17

Continuous Distillation

Objective

The objective is to study the process of continuous distillation in a sieve plate column, for the separation of a water-ethanol mixture. The tray efficiency for the column, mass and energy balances, and heat loss should also be determined.

Apparatus Required

Equipment required: Distillation column made of glass with perforated plates, specific gravity bottle, specific gravity balance, Abbe refractometer, laboratory droppers, laboratory glassware.

The mixture to be separated is ethanol-water. The actual number of plates in the distillation column is 12. Metering pumps have been used for the feed and the reflux.

Theory

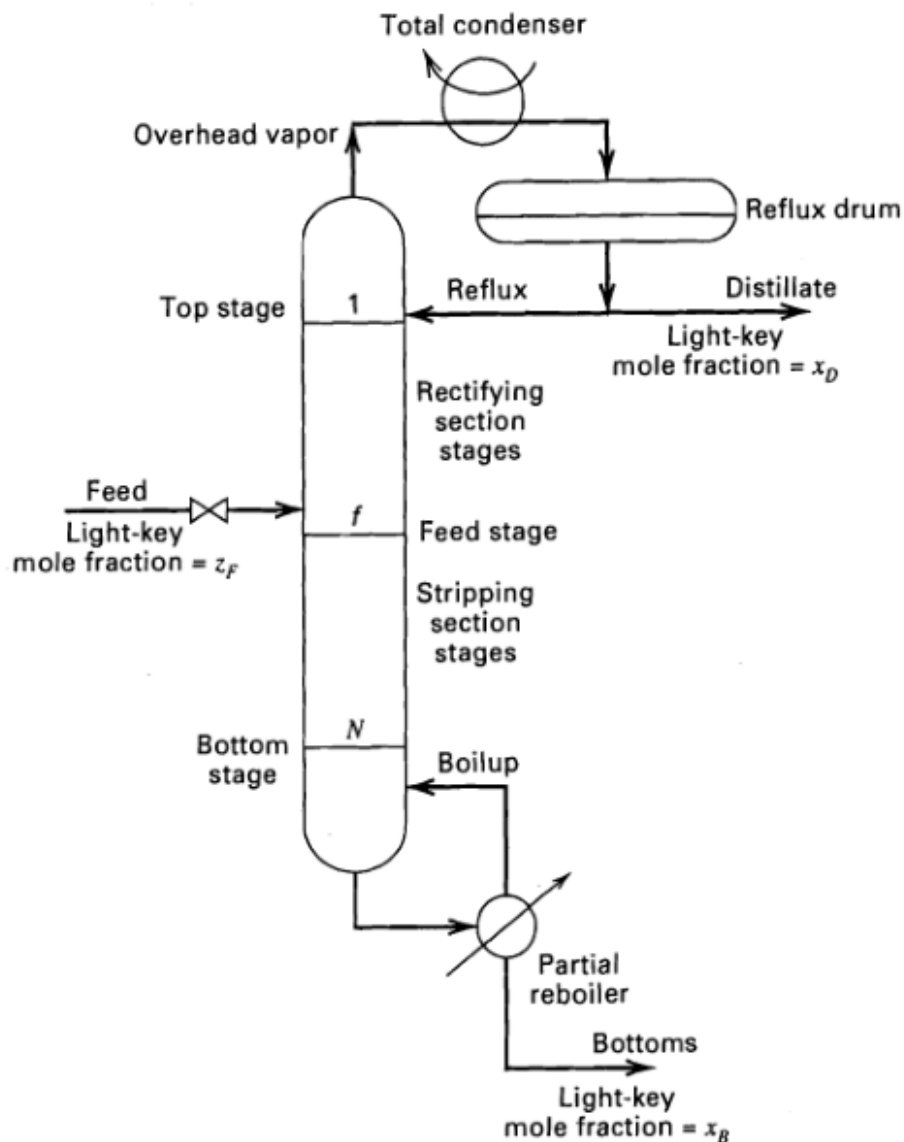


Figure 0.1: Distillation Operation Using a Total Condenser and Partial Reboiler

The general countercurrent-flow, multistage, binary-distillation operation consists of a column containing the equivalent of N theoretical stages; a total condenser in which the overhead vapor leaving the top stage is totally condensed to give a liquid distillate product and liquid reflux that is returned to the top stage; a partial reboiler in which liquid from the bottom stage is partially vaporized to give a liquid bottoms product and vapor boil-up that is returned to

the bottom stage, and an intermediate feed stage Seader, Henley, and Roper (2016). By means of multiple, countercurrent contacting stages arranged in a two-section cascade with reflux and boil-up, it is possible to achieve a sharp separation between the two components in the feed unless an azeotrope is formed, in which case one of the two products will approach the azeotropic composition. For the ethanol-water system, separation can only be achieved up to 95.5% ethanol.

Assumptions

In order to plot the locus of all passing streams in the rectifying section as a straight line of the form $y = mx + c$, the total molar flow rates L and V cannot vary from stage to stage. The following are the *McCabe-Thiele assumptions*¹.

1. The mixture is binary.
2. The column operates in the steady-state condition.
3. The feed stream is mixed with the feed stage fluids prior to separation.
4. Each stage reaches equilibrium.
5. The two components have equal and constant molar enthalpies of vaporization (latent heats).
6. Component sensible-enthalpy changes ($C_p\Delta T$) and heat of mixing are negligible compared to latent heat changes.
7. The column is well insulated so that heat loss is negligible.
8. The pressure is uniform throughout the column (no pressure drop).

The assumptions above lead to the condition of *constant molar overflow* in the rectifying section. Constant molar overflow refers to a molar liquid flow rate that remains constant as the liquid flows over each weir, from one stage to the next.

External Reflux Ratio

The liquid entering the top stage is the external reflux rate, L_0 , and its ratio to the distillate rate, L_0/D , is the reflux ratio, R . Because of the assumption of constant molar overflow, R is a constant in the rectifying section Seader, Henley, and Roper (2016), Smith (2012):

$$R = \frac{L}{D} \quad (0.1)$$

¹Seader, Henley, and Roper (2016), Gorak and Sorensen (2014)

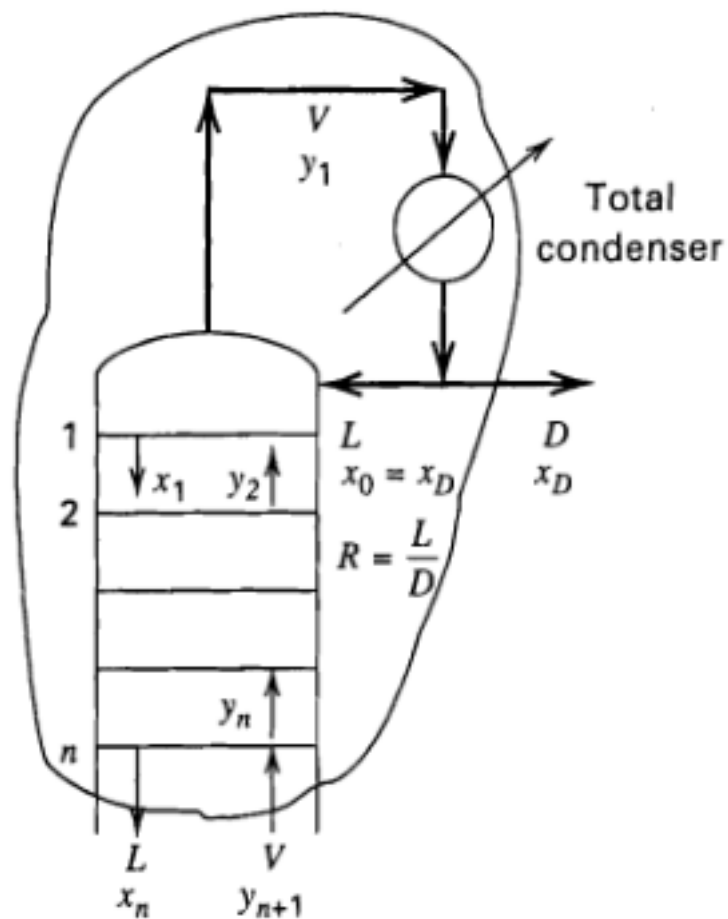
Rectifying Section

Figure 0.2: Rectifying Section

A material balance for the light key over the envelope shown in figure 0.2 for the total condenser and stages 1 to n is as follows, where y and x refer to vapor and liquid mole fractions, respectively, for the light key:

$$V_{n+1}y_{n+1} = L_nx_n + Dx_D \quad (0.2)$$

Solving for y_{n+1} , we get:

$$y_{n+1} = \frac{L_n}{V_{n+1}}x_n + \frac{D}{V_{n+1}}x_D \quad (0.3)$$

Where we note that:

- L_0 is the external reflux rate
- D is the distillate rate
- $\frac{L_0}{D}$ is the reflux ratio, R

Additionally we know from the overall mass balance around the equipment envelope that,

$$V = L + D \quad (0.4)$$

From this, we may now note the relation between the operating line and the reflux ratio, ie. 0.5


$$\frac{L}{V} = \frac{L}{L + D} = \frac{L/D}{L/D + D/D} = \frac{R}{R + 1} \quad (0.5)$$

Similarly,

$$\frac{D}{V} = \frac{D}{L + D} = \frac{1}{R + 1} \quad (0.6)$$

From equations 0.4, 0.5 and 0.6 we now have the most used form, that of 0.7

$$y = \left(\frac{R}{R + 1} \right) x + \left(\frac{1}{R + 1} \right) x_D \quad (0.7)$$

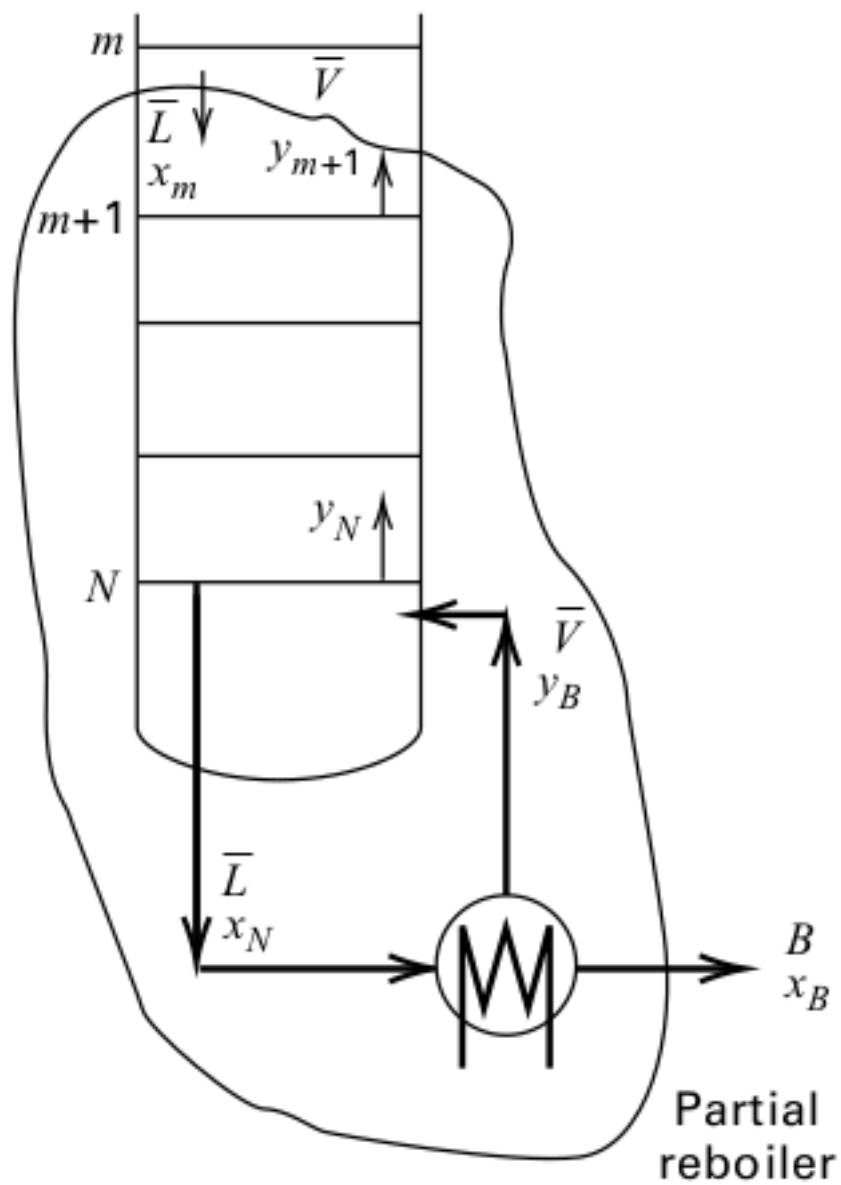Stripping SectionFigure 0.3: *Stripping Section*

Analogous to the develop above, we shall step through the equations of note in the stripping section, marked in 0.3. Vapor leaving the partial reboiler is assumed to be in equilibrium with the liquid bottoms product, B , making the partial reboiler an equilibrium stage. The vapor

rate leaving it is the boilup, \bar{V}_{N+1} , and its ratio to the bottoms product rate, $V_B = \bar{V}_{N+1}/B$ is the *boilup ratio*. With the constant-molar overflow assumption, V/B is constant in the stripping section.

Since $\bar{L} = \bar{V} + B$, we have

$$\frac{\bar{L}}{\bar{V}} = \frac{\bar{V} + B}{\bar{V}} = \frac{V_B + 1}{V_B} \quad (0.8)$$

$$\frac{B}{\bar{V}} = \frac{1}{V_B} \quad (0.9)$$

Similar to the section above we now have the final equation in 0.10.

$$y = \left(\frac{V_B + 1}{V_B} \right) x - \left(\frac{1}{V_B} \right) x_B \quad (0.10)$$

Feed Conditions

The feed line equation is given by:

$$y = \frac{q}{q-1}x - \frac{z_F}{q-1} \quad (0.11)$$

Table 0.1: Possible Feed Conditions and Corresponding q Values².

Feed condition	f	q	q Calculation
Subcooled liquid	$f < 0$	$q > 1$	$q = [c_{P,L}(T_{bp} - T_F) + \Delta H_{vap}]/\Delta H_{vap}$
Liquid at bubble point	0	1	$q = \Delta H_{vap}/\Delta H_{vap} = 1$
Partially vaporized	$0 < f < 1$	$1 < q < \infty$	$q = [(1-f)\Delta H_{vap}]/\Delta H_{vap}$
Vapor at dew point	1	0	$q = 0$

Feed condition	f	q	q Calculation
Superheated vapor	$f > 1$	$q < 0$	$q = -[c_{P,V}(T_F - T_{dp})]/\Delta H_{vap}$

Procedure

1. The flow rate through the condenser was set at $2.5L/min$.
2. The calibration curve for refractive index with alcohol percent was obtained. The calibration curve for specific gravity was also calculated.
3. The feed composition was determined and the reboiler was filled with it.
4. The reboiler was started and cooling water began circulation in the condenser.
5. For operating the column using total reflux, the entire distillate was returned to the column, and no secondary feed was provided. Secondary feed was provided only for the partial reflux cases.
6. The minimum reflux ratio for the feed conditions was determined, assuming 85 mole purity of the distillate.
7. The column was operated under a reflux ratio higher than minimum reflux ratio, and samples were obtained at the steady states.
8. A sample from the bottoms was collected every 10 minutes. The refractive index was measured using an Abbe refractometer. The specific gravity of the distillate was measured.
9. All the flow rates (distillate, reflux, feed, cooling water) and temperature (bottom, distillate, condenser inlet and outlet) were measured. The power
10. After the total reflux condition was achieved, a secondary feed was used to operate the column using a reflux ratio between 3 to 4.
11. The flow rates of the distillate and bottoms were adjusted so that the overall mass balance adjusted for the desired reflux ratio.

²Gorak and Sorensen (2014)

12. The total distillate and bottoms were collected and measured to verify the overall mass balance.
 13. The refractive index of the total bottoms and the specific gravity of the distillate was measured to get an indication of the degree of purification for a fixed reflux ratio.
- The overall electricity consumption was also measured for the entire process.

Line Diagram



Figure 0.4: Lab Setup

The actual lab equipment is represented in Figure 0.4.

Tables and Graphs

The observation table is depicted in image form. This has been done to preserve the authenticity of the data and the format of the report. The relevant figure is Figure 0.5.

Continuous Distillation

DATE - 30/07/2018

Reboiler feed volume = 1560 ml	Initial Energy meter reading =	Flow rate of cold water = 2.25 l/min	NAME OF STUDENT 1. 2. 3. 4.
Secondary feed volume = 500 ml	Final energy meter reading =	Cold water in condensor	
Reboiler feed RI = 1.3535 and/or n_D	Heating time start = 5:30.1	Inlet temp =	
SG =	Heating time end = 5:40.9	Outlet temp =	
Secondary feed RI = 1.3535 and/or	Empty weight of SG bottle = 18.911 gm		
SG =	Weight of SG bottle (water) = 28.241 gm		

Part I - Total reflux condition:

Sr. No.	1	2	3
Time start	4:41 PM	5:11	5:11
Time end	5:11 PM	5:21	5:21
Temp of vapor	75°C	74	74
Cold water inlet temp	27°C	28	28
Cold water outlet temp	29°C	29	29
Reboiler temp	91	91	91
Secondary feed flow rate	0 ml/min	0	0
Distillate flow rate	8.5 ml/min	8.5	8.5
Flow rate at the TOP			
Section			
LiRebu			
Distillate out			
SG of distillate	0.82	0.82	0.82
RI at the bottom	1.344	1.342	1.340

Part II - Partial reflux condition:

Sr. No.	1	2	3	4
Time start	5:50 PM	6:00 PM		
Time end	6:50 PM	6:10 PM		
Temp of vapor	74	74		
Cold water inlet temp	28	28		
Cold water outlet temp	29	29		
Reboiler temp	98	114		
Secondary feed flow rate (F)	8.5 ml/min	8.57		
Distillate flow rate (D)				
Flow rate at the TOP				
LiRebu				
Distillate out	7.32 ml/min	7.32		
SG of distillate	2.47 ml/min	2.47		
RI at the bottom	0.82	0.82		
RI at the bottom	1.341	1.341		
Partial ratio (D/F)	2.96	2.96		

RI of Distillate = 1.36

Bottom collected after 20 min = 60 + 60 = 120 ml (60 ml/min)

Top flow collected after 20 min = 60 + 60 = 120 ml (60 ml/min)

RI of Distillate = 1.345

RI of bottom collected = 1.345

Total volume of distillate = 150 ml

Total volume of bottom collected = 6.24 ml

Total consumption of secondary feed = 500 - 330 = 170 ml

NAME OF TA

SING. OF TA

Figure 0.5: Observation Table

The calibration curves from both the refractive index observations as well as the specific

Table 0.2: Calibration Curve Data

Volume (ml)		Moles		Mole Fraction		Refraction Index	Mass of Bottle (+Sample) (mg)	Specific Gravity
Ethanol	Water	Ethanol	Water	Ethanol	Water			
0	18	0	1	0	1	1.333	28.341	1
15	14	0.026	0.780	0.032	0.968	1.353	27.619	0.920
23	13	0.4	0.730	0.354	0.646	1.361	27.207	0.880
31	11	0.53	0.610	0.465	0.535	1.363	27.126	0.870
38	9	0.65	0.500	0.565	0.435	1.363	26.977	0.860
46	7	0.79	0.390	0.669	0.331	1.364	26.808	0.840
53	5	0.91	0.280	0.765	0.235	1.363	26.795	0.840
61	4	1.05	0.230	0.820	0.180	1.362	26.618	0.820
68	2	1.17	0.120	0.907	0.093	1.361	26.468	0.800
76	0	1.3	0	1	0	1.361	26.434	0.800

gravity ones are plotted in Figures 0.6 and 0.7. The data for both curves has been tabulated in Table 0.2.

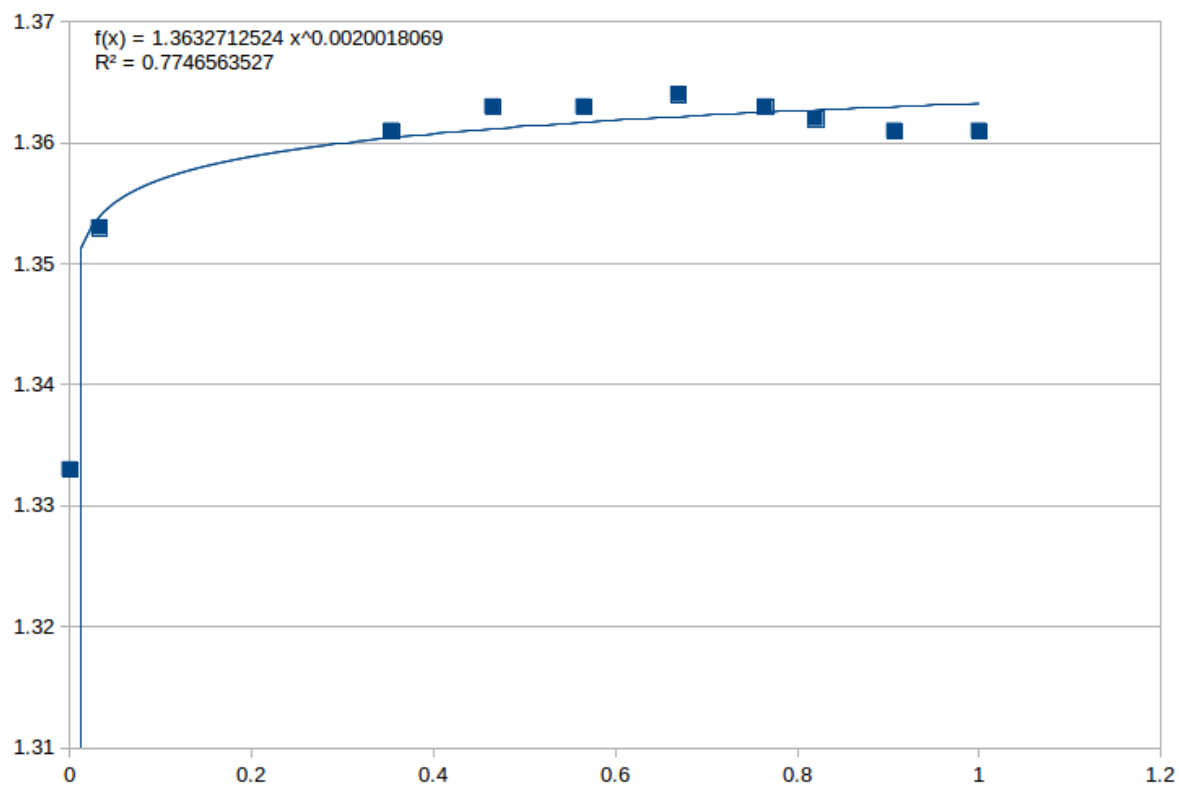


Figure 0.6: Calibration Curve from Refractive Index Data

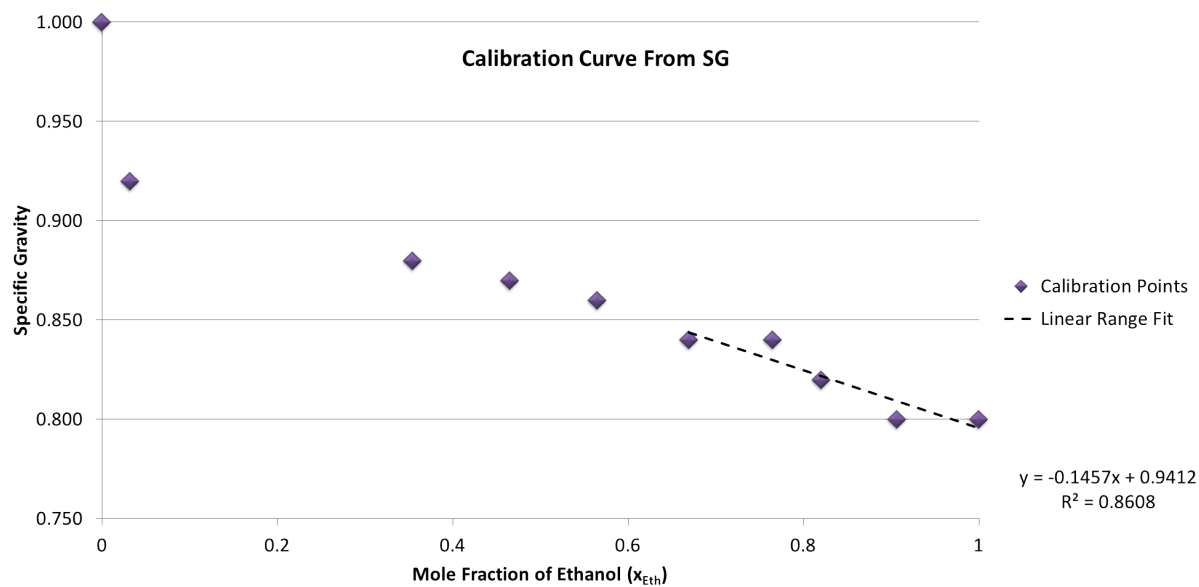


Figure 0.7: Calibration Curve from Specific Gravity Data

Table 0.3: Vapor Liquid Equilibrium Data

x_{EtOH}	x_w	y_{EtOH}	y_w	T, °C
0	1	0	1	100
0.019	0.981	0.17	0.83	95.5
0.0721	0.9279	0.3891	0.6109	89
0.099	0.9034	0.4375	0.5625	86.7
0.1238	0.8762	0.4704	0.5296	85.3
0.1661	0.8339	0.5089	0.4911	84.1
0.2337	0.7663	0.5445	0.4555	82.7
0.2608	0.7392	0.558	0.442	82.3
0.3273	0.6727	0.5826	0.4174	81.5
0.3965	0.6035	0.6122	0.3878	80.7
0.5198	0.4802	0.6599	0.3401	79.7
0.5732	0.4268	0.6841	0.3159	79.3
0.6763	0.3237	0.7385	0.2615	78.74
0.7472	0.2528	0.7815	0.2185	78.41
0.8943	0.1057	0.8943	0.1057	78.15
1	0	1	0	78.3

Using the McCabe Thiele method, the number of stages were plotted in 0.8 and 0.9.

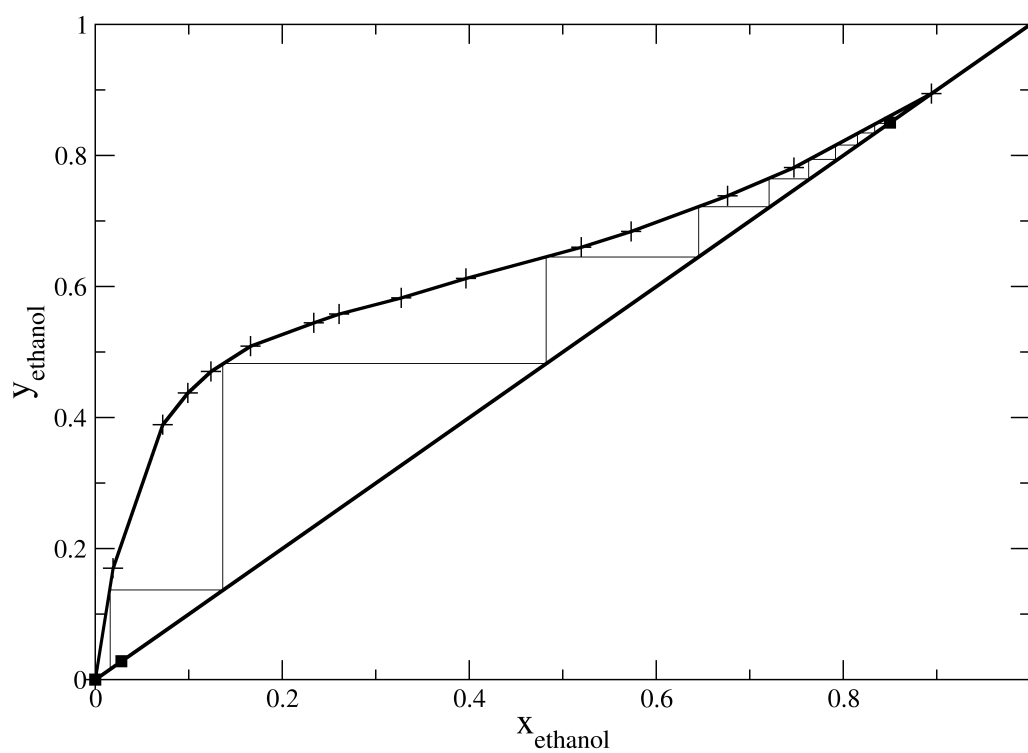


Figure 0.8: *Total Reflux*

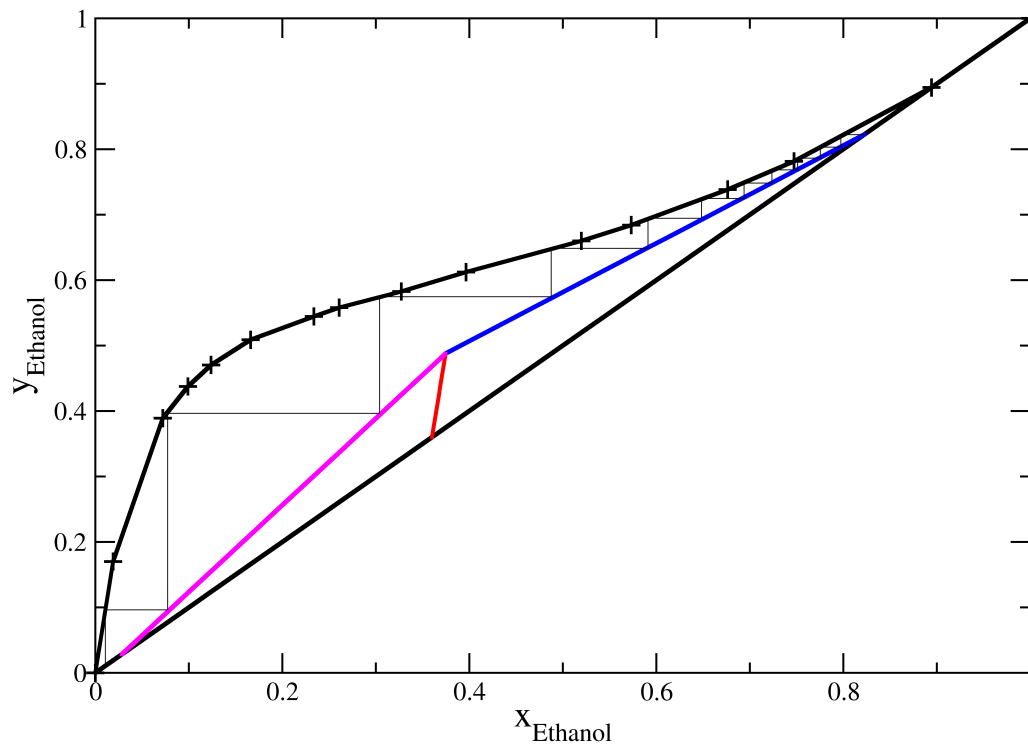


Figure 0.9: Partial Reflux

Calculations

Specific Gravity Calculations

Weight of the empty bottle = $18.911g$

The weight of $10g$ liquid in the bottle is the sum of the weight of the liquid and the weight of the empty bottle. To get the weight of only the liquid, the weight of the empty bottle must be subtracted from the reading obtained from the specific gravity balance.

Weight of liquid water = $28.341 - 18.911 = 9.43g$

Specific gravity of the liquid = $\frac{9.43}{10} = 0.943g/mL$

Calibration Curve

From the calibration curves Figures 0.6 and 0.7, relations for the mole fractions of ethanol can be determined:

$$x_{Eth} = \frac{(RI - 1.3428)}{0.04168} \quad (0.12)$$

$$x_{Eth} = \frac{(SG - 0.94122)}{0.14565} \quad (0.13)$$

0.12 is used for lower mole fractions of ethanol, while 0.13 is used for higher mole fractions.

Feed Line Equation

Refractive Index of the feed mixture = 1.357 = 0.36 mole fraction

The bubble point of feed mixture must be determined. The temperature of the feed is room temperature; i.e. $30^{\circ}C$.

The Antoine equations for ethanol³ and water⁴ are :

$$\log_{10}(P^*) = 4.92531 - \frac{1432.526}{(T - 61.819)} \quad (0.14)$$

$$\log_{10}(P^*) = 3.55959 - \frac{643.748}{(T - 198.043)} \quad (0.15)$$

where,

- P is the vapour pressure in bar
- T is the temperature in Kelvin

Rault's law is given by:

$$P = P_A^*x_A + P_B^*x_B \quad (0.16)$$

Using 0.14 , 0.15, 0.16 we obtain, at atmospheric pressure:

³Ambrose, Lawrenson, and Sprake (1975)

⁴Liu and Lindsay Jr (1970)

$$760 = x_{Eth}[10^{4.92531-1432.526/(T-61.819)}] + (1 - x_{Eth})[10^{3.55959-643.748/(T-198.043)}] \quad (0.17)$$

Using 0.17, we calculate the bubble point of the feed to be $363.2K = 90.2^\circ C$.

Specific heat capacity of the mixture is given by:

$$c_{p,mix} = x_{Eth}c_{p,Eth} + (1 - x_{Eth})c_{p,wat} \quad (0.18)$$

ΔH_{vap} of the mixture is given by:

$$\Delta H_{vap,mix} = x_{Eth}\Delta H_{vap,Eth} + (1 - x_{Eth})\Delta H_{vap,wat} \quad (0.19)$$

Using the equations from Table 0.1, we calculate:

$$q = 1.133 \quad (0.20)$$

From @#eq:subcool and Table 0.1, it can be concluded that the feed is *subcooled*.

Using 0.11, the equation for the feed line can be obtained from the calculated value of q :

$$y = 8.52x - 2.707 \quad (0.21)$$

Total Reflux Condition

Specific gravity of distillate = 0.82

Refractive index of bottoms = 1.344

x_{Eth} for distillate = 0.823

x_{Eth} for the bottoms = 0.028

Rectifying Line

For the total reflux condition, $R \rightarrow \infty$, and thus, on substituting into 0.7, we obtain:

$$y_{n+1} = x_n \quad (0.22)$$

Stripping Line

$$V = L + D \quad (0.23)$$

where:

- V and L are the constant molar overflows
- D is molar flow rate of the distillate

Since $D = 0$, $V = L$.

$$y_{m+1} = x_m \quad (0.24)$$

Tray Efficiency

Number of trays from the plot = 9

Actual number of trays = 12

The tray efficiency is calculated as:

$$Efficiency = \frac{9}{12} \times 100 = 66.67\%$$

Partial Reflux Condition

Specific gravity of distillate = 0.82

Refractive index of bottoms = 1.343

x_{Eth} for distillate = 0.823

x_{Eth} for the bottoms = 0.02

Reflux ratio $R = 2.96$

Material Balance

Overall Material Balance

$$F = D + B \quad (0.25)$$

From the observation table, $F = 8.57 \text{ mL/min}$, $B = 6 \text{ mL/min}$, $D = 2.47 \text{ mL/min}$

The total feed supplied is the sum of the primary feed and the secondary feed.

Secondary feed = $500 - 330 = 170 \text{ mL}$

Primary feed = 1500 mL

Total feed = $1500 + 170 = 1670 \text{ mL}$

Distillate volume = 160 mL

Total volume of bottoms collected = 621 mL

According to the ideal material balance equation in 0.25, the L.H.S and R.H.S. are calculated as:

$$L.H.S. = F = 1670 \text{ mL} \quad (0.26)$$

$$R.H.S. = B + D = 160 + 621 = 781 \text{ mL} \quad (0.27)$$

Density of ethanol = 0.789 g/mol

Density of water = 1.0 g/mol

Density of the feed, with z_F of 0.36 = $z_F \rho_{Eth} + (1 - z_F) \rho_{wat} = 0.924 \text{ g/mol}$

Density of distillate = $x_D \rho_{Eth} + (1 - z_F) \rho_{wat} = 0.826 \text{ g/mol}$

Density of the bottom = $x_w \rho_{Eth} + (1 - z_F) \rho_{wat} = 0.996 \text{ g/mol}$

Molecular weight of the feed = $0.36 \times 46 + (1 - 0.36) \times 18 = 28.08 \text{ g/mol}$

Molecular weight of the distillate = $0.823 \times 46 + (1 - 0.823) \times 18 = 41.04 \text{ g/mol}$

Molecular weight of the bottom = $0.02 \times 46 + (1 - 0.02) \times 18 = 18.56 \text{ g/mol}$

Moles in the feed = 53.97 mol

Moles in the distillate = 3.22 mol

Moles in the bottom = 33.32 mol

Component Material Balance

The component material balance is given by:

$$Fz_F = Dx_D + Bx_w \quad (0.28)$$

On solving 0.28, we get:

$$L.H.S. = 53.97 \times 0.36 = 19.43 \text{ mol} \quad (0.29)$$

$$R.H.S. = 3.22 \times 0.823 + 33.32 \times 0.02 = 3.31 \text{ mol} \quad (0.30)$$

Energy Balance

Heat capacity of water = 75.6 J/molK

Heat capacity of the ethanol = 111.46 J/molK

Heat capacity of the distillate = $x_D c_{p,Eth} + (1 - x_D) c_{p,wat} = 105.11 \text{ J/molK}$

Heat capacity of the feed = $z_F c_{p,Eth} + (1 - z_F) c_{p,wat} = 88.51 \text{ J/molK}$

Heat capacity of the bottom = $x_w c_{p,Eth} + (1 - x_w) c_{p,wat} = 76.31 \text{ J/molK}$

Energy Input

Energy given to the reboiler = $590.9 - 590.1 = 0.8 \text{ kWh} = 0.8 \times 3600 \text{ kJ} = 2889 \text{ kJ}$

Energy Output

The feed is at room temperature; i.e. at 30°C .

Temperature of the distillate = 74°C

Average temperature of the bottom = $0.5 \times (98 + 114) = 106^\circ\text{C}$

Energy of the distillate = $m c_p \Delta T = 14.89 \text{ kJ}$

Energy of the bottom = $m c_p \Delta T = 33.32 \times 76.31 \times (106 - 30) = 193.24 \text{ kJ}$

Energy lost in the condenser = $\rho V_{flow} c_p \Delta T \times \text{time} = 2196.6 \text{ kJ}$

Total Heat Lost

$$\text{Total heat loss} = 2889 - (14.89 + 193.24 + 2196.6) = 484.3 \text{ kJ}$$

Rectifying Line

Using 0.7, the rectifying line obtained is:

$$y_{n+1} = 0.747x_n + 0.25 \quad (0.31)$$

Stripping Line

From 0.23, 0.10, we obtain:

$$y_{m+1} = \frac{L}{(L+D)}x_m - \frac{B}{(L+D)} \quad (0.32)$$

On solving 0.32, the stripping line can be obtained:

$$y_{m+1} = 0.748x_m - 0.613 \quad (0.33)$$

Tray Efficiency

Number of trays from the plot = 11

Actual number of trays = 12

The tray efficiency is calculated as:

$$\text{Efficiency} = \frac{11}{12} \times 100 = 91.67\%$$

Results and Discussion

1. The overall material balance indicated a loss in mass. This can be explained by a mass accumulation inside the column, which may be a result of non-ideal tray hold-up, which does not remain constant throughout the operation.

2. When the column reflux ratio was changed from total reflux to partial reflux, a rise in the reboiler temperature, from an average of 91°C to 106°C .
3. A higher number of trays was required for the partial reflux case, consistent with the decline of driving force for the separation.
4. The heat loss during the separation was about 16.7%. This may be attributed to insufficient insulation.
5. Ethanol and water form a minimum boiling azeotrope at a composition of 95.5% by weight of ethanol,⁵ (Lide 2003). Once this composition has been achieved, the liquid and vapour have the same composition, and no further separation is possible without using an entrainer. Absolute alcohol can be obtained using the process of heterogeneous azeotropic distillation Seader, Henley, and Roper (2016). The addition of benzene to an ethanol-water mixture results in the formation of a minimum-boiling, heterogeneous ternary azeotrope containing, by weight, 18.5% alcohol, 74.1% benzene, and 7.4% water, boiling at 64.85°C . Upon condensation, the ternary azeotrope separates into two liquid layers: a top layer containing 14.5% alcohol, 84.5% benzene, and 1% water, and a bottom layer of 53% alcohol, 11% benzene, and 36% water, by weight. The benzene-rich layer is returned as reflux. The other layer is sent to a second distillation column for recovery and recycling of alcohol and benzene. Absolute alcohol, which has a boiling point above that of the ternary azeotrope, is removed at the bottom of the column.

Conclusions

1. The value of q obtained for the feed is 1.133, which indicates that the feed is in the subcooled condition. This is in accordance with the feed actually used in the experiment, which was a liquid at room temperature.
2. In the case of partial reflux, the tray efficiency is 91.67%, which is higher than the tray efficiency 66.67% for the total reflux condition. This may be attributed to the ease of separation for the two cases.

⁵Speight (2005)

References

- Ambrose, D, IJ Lawrenson, and CHS Sprake. 1975. "The Vapour Pressure of Naphthalene." *The Journal of Chemical Thermodynamics* 7 (12). Elsevier: 1173–6.
- Gorak, A., and E. Sorensen. 2014. *Distillation: Fundamentals and Principles*. Handbooks in Separation Science. Elsevier Science. <https://books.google.co.in/books?id=7QbUAgAAQBAJ>.
- Lide, D.R. 2003. *CRC Handbook of Chemistry and Physics, 84th Edition*. CRC Handbook of Chemistry and Physics. Taylor & Francis. <https://books.google.co.in/books?id=kTnxSi2B2FcC>.
- Liu, Chia-Tsun, and William T Lindsay Jr. 1970. "Vapor Pressure of Deuterated Water from 106 to 300. Deg." *Journal of Chemical and Engineering Data* 15 (4). ACS Publications: 510–13.
- Seader, J.D., E.J. Henley, and D.K. Roper. 2016. *Separation Process Principles with Applications Using Process Simulators, 4th Edition*. Wiley. <https://books.google.co.in/books?id=TcJ2CwAAQBAJ>.
- Smith, C.L. 2012. *Distillation Control: An Engineering Perspective*. Wiley. <https://books.google.co.in/books?id=IC5IqHDsGpcC>.
- Speight, J. 2005. *Lange's Handbook of Chemistry, 70th Anniversary Edition*. McGraw-Hill Education. <https://books.google.co.in/books?id=XngXtgEACAAJ>.