

PLAGRO

Products For Agro Industry


CHAIN CONVEYORS

Chain conveyors are used in a wide variety of applications in bulk storage and handling systems and in processing plants especially in the Agri Industry.

In materials receiving (intake) sections, they move the material from the rail or road receiving pits, and then they distribute the material among the storage bins or discharge them.

TYPE OF CONVEYORS

- Trough chain conveyor
- Chain conveyor
- Drag Chain conveyor

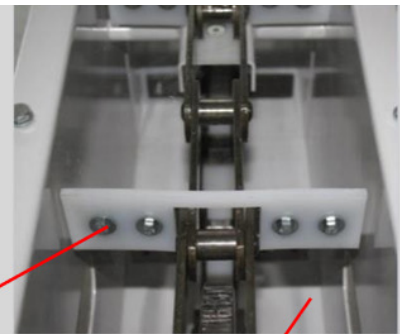

PLAGRO
Scrapers

ARETE Liner for trough base



Arete Liners are extensively used in Chain conveyors for enhancing the life of conveyors .


Advantages of Using Arete liners in chain conveyors

- Continuous PLAGRO lined scrapers on each plate link in combination with a Arete lined trough bottom improve the life time of the chain conveyor considerably
- Continuous PLAGRO scrapers on every plate link reduces power consumption considerably because of low coefficient of friction of Arete Liners
- Reduces noise up to 50% because of no metal to metal contact and smoother run of the chain .






Various Designs of PLAGRO Drag Lifters

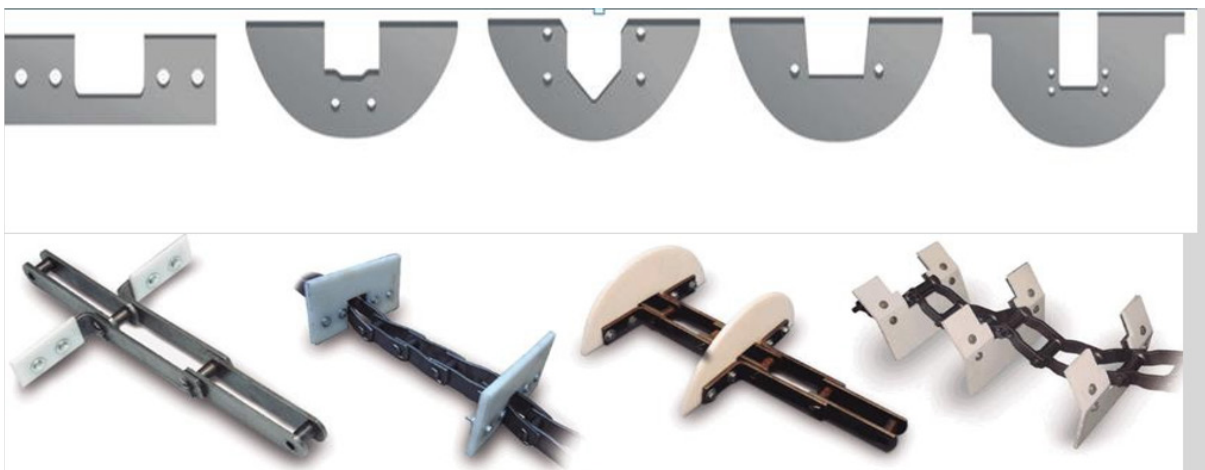

APPLICATIONS

- Animal Feed
- Grains handling
- Solvent extraction plant
- Wheat and Rice handling plants
- Brewing
- Oilseeds :ground nut ,mustard ,Soybean
- Corn and Maize
- Flour Mills
- Agricultural farm equipment's like Harvesters ,Tillers ,Sowing equipment's etc
- Refined oil and Vanaspati ghee plants

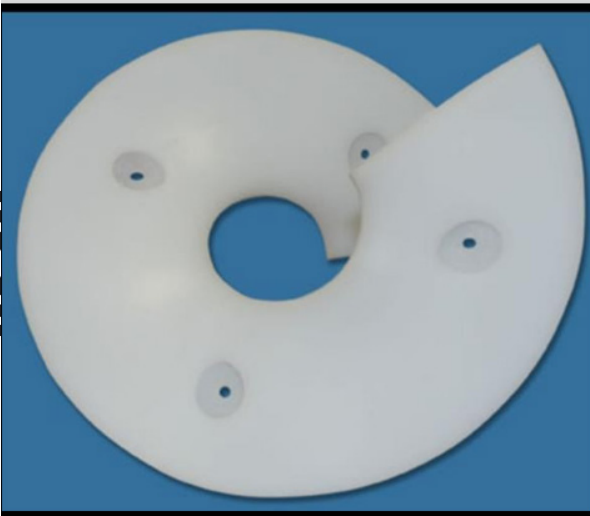

Liners for Screw conveyors flights



Liners for Screw conveyors bed



Guide & Chain Tensioners



Corn Stalk Guides




Stripper Combs



Idler Rollers




PLAGRO Spares for Agricultural Farm Equipment

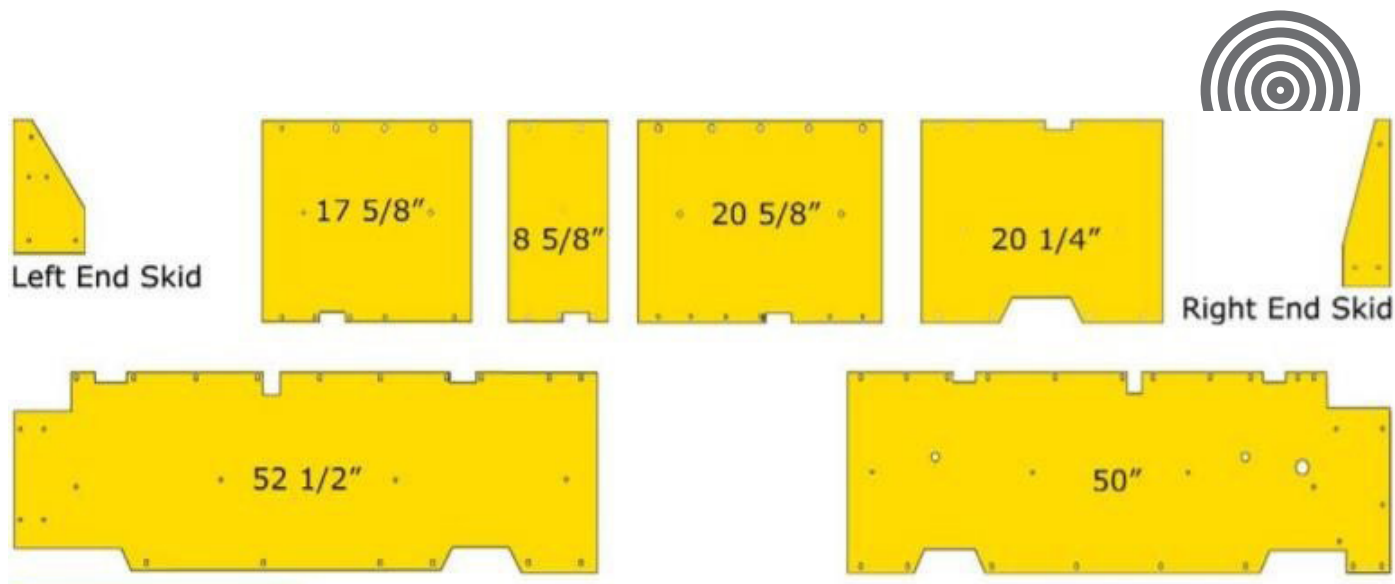

Plagro Skid Shoes 6mm thick for John Deere Combine Harvesters



Plagro Skid Shoes 6mm thick for Case Combine Harvesters

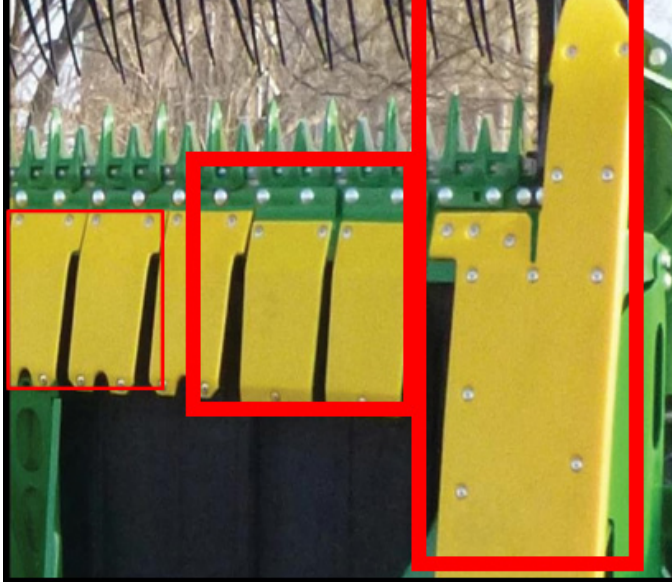

All Yellow colour skid shoes are UHMWPE
6mm machined and bend parts


Standard Stock sizes for Agri Industry



	WIDTH (in mm)	LENGTH (in mm)	THICKNESS
Sheet	1000	2000	6
Sheet*	1250	3000	6
Sheet	1000	2000	10
Sheet*	1250	3000	10
Strip	103	2500	10
Strip**	205	2500	10
Strip**	225	2500	10
Strip**	255	2500	10
Strip	275	2500	10
Strip	300	2500	10
Strip	400	2500	10
Rod	70 dia.	1000	10

*will be made shortly

** minimum order quantity

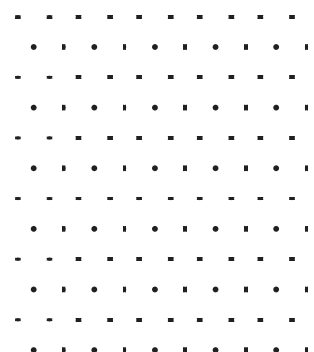

Technical Data Sheet Of Arete Liners

Property	Unit	Testing Method	Arete L-V Super Slide	Arete L-V	Arete L-V030
Density	g/cm ³	ISO 1183	0.93	0.93	0.935
Molecular Weight	gm/Mol	-	9.2 x 10 ⁶	6.8 x 10 ⁶	3.5-5 x 10 ⁶
Tensile Strength	MPa	ISO 527-1	>17	>17	>20
Elongation At Break	%	ISO 527-1	>300	>200	>200
Shore Hardness D 15s	-	ISO 868	63	65	65
Impact Strength 15 V Notch	kg./m ²	ISO 179	>130	>180	>210
Co-efficient of Friction	-	-	<= 0.15	<= 0.15	Max 0.18
Abrasion Resistance By Send Slurry Method	-	Internal Test Method	70	90	120
Co-efficient of Linear Thermal Expansion	°C ⁻¹	ISO 11539	2 x 10 ⁻⁴	2 x 10 ⁻⁴	2 x 10 ⁻⁴

.....

