

POCAPP

POLYRIB Cable drum packaging
& protection system

WHAT IS CABLE DRUM?

Cable Drum is used to transport HT (high tension), LT cables and Aluminium conductors, the cables are wound on the drum and transported from factories to the site.



HT & LT Cables



Cable being unwinded from a cable drum



Cable wound on cable drum



Al Conductor




Al Conductor on cable drum





WHY IS PROTECTION REQUIRED?

- Protection is required to prevent any damage to the cable.
- Cables are used in single length of 150 metres , any damage to any part of the cable Will result in very high loss
- Previously Wood planks were used to protect the cable and was nailed To the circumference of the Cable drum,It is expensive and time consuming.
- POCAPP sheets provide a cost effective, faster solution for packing the Cable drum

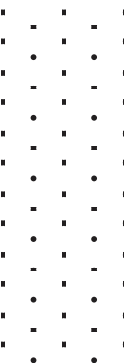

POCAPP ADVANTAGES OVER EXISTING PACKAGING SYSTEMS

1. PROTECTION

- Reduces drum flange damages and fits flush between drum flanges without hollow space
- Provides waterproof UV stable drum covering
- Is crush resistant to 100 kg/cm³.
- The material is fully insect resistant.
- Resistant to compressive loads



2. OCCUPATIONAL HEALTH & SAFETY

- Easy one man lagging process so very easy to apply
- Reduced risk of injury- no risk from nails and splinters.

3. COSTS

- Huge savings in packaging time and therefore in labour costs
- No waste — width can be precut to necessary size
- Length will be cut to traverse of width
- Material can be reused
- Weldable

4. ENVIRONMENT


- Can be recycled
- Can be made from Recycled polymers
- Saves felling of Trees and conserves precious natural resources





Old packaging solutions

NEW POCAPP PACKAGING SOLUTIONS-

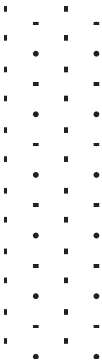

TYPES OF POCAPP SHEET POSSIBLE

- 
1. Colored sheet with no printing
 2. Colored sheet with printing
 3. Low cost Sheet black and Dark grey
 4. Rg sheet with colored Top layer
 5. Rg Sheet with colored top layer and printing
 6. ABA sheet
- All these variations are possible in continuous rolls of 100-150 kgs also
 - Width upto 2000 mm available

