


WHO ARE WE?




PAKETAL is a product line of KBK Plascon that makes Acetal/POM (Polyoxymethylene) sheets and machine parts that have uses spanned over multiple industries like Pharmaceutical injectable filling, guides for pharmaceutical conveyors. PAKETAL is an acetal copolymer (POM) that has a highly linear crystalline structure that provides outstanding wear, long term fatigue and creep resistance. It exhibits excellent resistance to moisture, solvents and strong alkalis. Its chemical structure provides high stability to thermal and oxidative degradation.

WHAT MAKES US SPECIAL?

- High toughness (down to -40°C)
- High hardness and stiffness
- Very good heat deflection resistance (operating temperature up to 100°C)
- Excellent resilience
- Good electric and dielectric behavior
- Good chemical resistance to fuels, solvents, strong alkalis
- No environmental stress cracking
- Good slip properties
- Low water absorption resulting in high dimensional stability

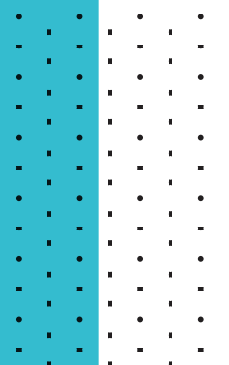

OUR SHEETS

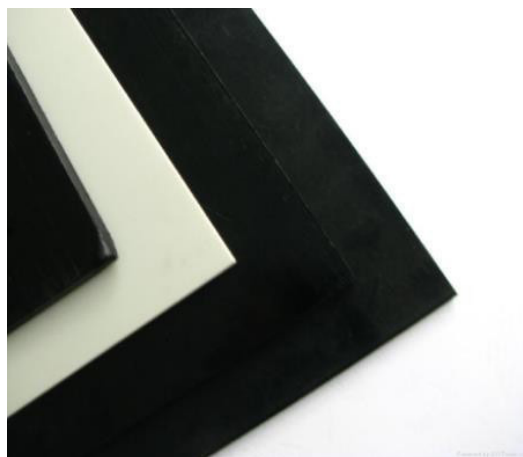

OUR PRODUCTS



AREAS OF APPLICATION

For components with particularly high requirements in terms of dimensional stability and visual effect. Like Industrial Gears, bearings, pulleys, slide and spring elements, parts for fittings, pumps, compressed-air manifolds, conveyor links sliding elements, gears, control discs, impellers, bearings, pump components, valve bodies etc. for Pharma material handling, automobile and chemical industry.



TECHNICAL PROPERTIES

Property	Test Method	Unit	Value
Density	ISO 1183	g/cm ³	1.41
Water absorption (23 C, 24 hrs)	ISO 62	%	0.6
Tensile Strength	ISO 527-1,2	Mpa	59
Strain at break	ISO 527-1,2	%	40
Flexural Strength	ISO 178	MPa	81
Flexural Modulus	ISO 178	Mpa	2350
Charpy Impact Strength (notched)	ISO 179/1eA	Kj/m ²	8
Temperature of deflection under load (1.8MPa)	ISO 75-1,2	°C	90
Co-efficient of linear thermal expansion (23-55°C, Flow Direction)	Our Standard	X10 ⁻⁵ /°C	12
Rockwell Hardness	ISO2039-2	M (Scale)	80
Specific Wear Amount (vs C-Steel, material side, pressure 0.98MPa, 30cm/s)	JIS K7218	X10 ⁻³ mm ³ / (N-km)	0.20
Co-efficient of Dynamic friction (vs C-Steel, pressure 0.98MPa, 30cm/s)	JIS K7218		0.23
Co-efficient of Dynamic friction (vs M90-44, pressure 0.06MPa, 15cm/s)	JIS K7218		0.37



DELIVERY PROGRAMME

THICK (in mm)	WIDTH (in mm)	LENGTH (in mm)	WEIGHT (in kg. per piece)
12	1000	2000	37
15	1000	2000	47
20	1000	2000	62
25	1000	2000	78
30	1000	2000	93
35	1000	2000	109
40	1000	2000	124
50	1000	2000	155
60	1000	2000	186
70	1000	2000	217
75	1000	2000	116
80	1000	2000	124
90	1000	2000	140
100	1000	2000	155

* if you do not see your product or dimensions please send a query about it to info@polyrib.com

* The final weight of sheets can vary

