Colour options

Eight colours across the range. Objekt Green is the signature colour.



Bone
Warm off-white; core neutral

Putty
Warm grey-stone; supporting neutral

Carbon
Soft black; core dark neutral

Ink
Deep navy; selective alternative

Oxblood
Deep burgundy; statement colour

Clay
Burnt terracotta; warm accent

Chocolate
Burnt chocolate brown; warm dark neutral

Objekt Green
Signature brand colour

Colours are shown as screen approximations. Confirm against physical paint samples before production.

Finishes


Paint system, paint finish and exposed metal finish.

Painted surfaces

PAINT SYSTEM


Electrostatic powder coating	**Duco paint**

PAINT FINISH Matte or Gloss, subject to the selected paint system



Matte

Soft, even light. No hard reflections.




Gloss

Sharp highlights and deeper colour.

Exposed metal

EXPOSED METAL FINISH Brushed or Mirror

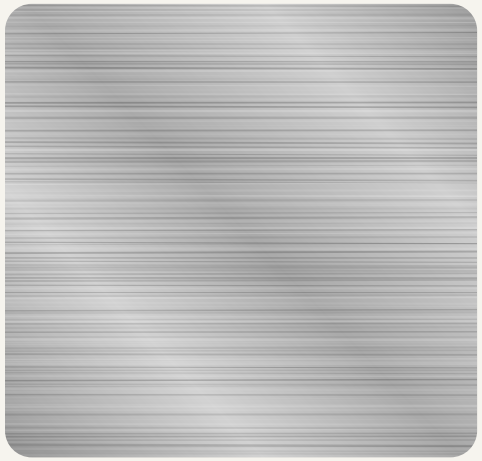

Brushed

Fine directional grain. Soft sheen.



Mirror

Polished, reflective surface.

Illustrations are indicative renderings, not photographs of finished samples.

How to specify a finish

Paint system + colour + finish. This replaces the blanket "Matte/Gloss lacquer" wording.

Paint system + **Colour** + **Finish**



Electrostatic powder coating · Carbon · Matte


Example specification



Duco · Oxblood · Gloss

Example specification

The range in matte and gloss

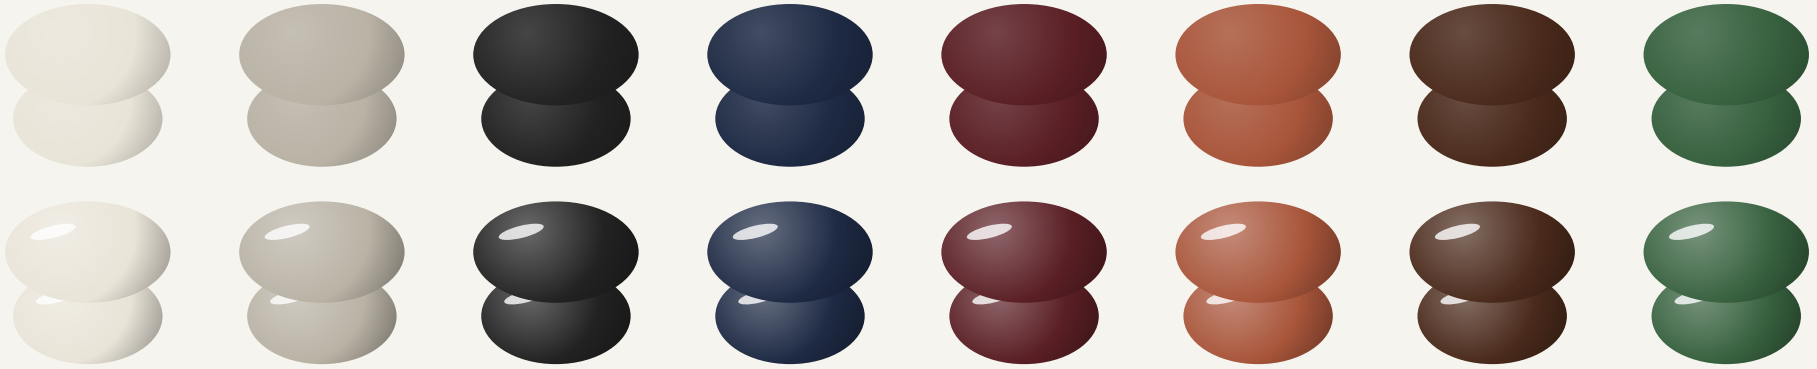

Forms are generic illustrations of colour and finish only. Not a product design.

Colour mixing guide

Starting mixes for a first trial. Adjust against a physical sample.

Colour	Starting mix (parts by weight, total 100)
Bone	White 98 Yellow oxide 1.3 Raw umber 0.7
Putty	White 83 Raw umber 11 Yellow oxide 4 Black 2
Carbon	Black 95 White 5
Ink	Ultramarine blue 62 Black 20 White 18
Oxblood	Crimson red 62 Burnt umber 28 Black 10
Clay	Red oxide 55 Yellow oxide 15 White 30
Chocolate	Burnt umber 88 Red oxide 10 Black 2
Objekt Green	Phthalo green 22 Yellow oxide 30 White 42 Raw umber 6

How to run the trial

1. Start small. Mix 100 g, weigh every tinter on a 0.01 g scale and write down each addition.
2. Add dark tinters last and in small amounts. They overpower quickly.
3. Spray or draw down a test panel on the same metal, primer and coats as production. Let it dry fully before judging. Wet and dry paint differ.
4. Compare in daylight beside a physical sample, not only on screen.
5. Match the sheen first. Gloss reads deeper and darker than matte in the same colour.
6. Adjust by half a part, bring the total back to 100 and test again. Keep the winning mix with the brand and batch.

Duco and other liquid paints can be tinted in the workshop or at a paint shop. Powder coating is normally matched by the powder maker, so send the HEX, a sample and the finish to the supplier for a custom match.

Tinter names and strengths vary by brand. Treat these numbers as a starting point, not a final formula.

خيارات الألوان

ثمانية ألوان عبر المجموعة. الأخضر أوبجيكت هو اللون المميز للعلامة.



عاجي
أبيض دافئ مائل للعاجي؛ لون محايد أساسي

رمادي حجري
رمادي حجري دافئ؛ لون محايد مساند

أسود فحمي
أسود هادئ؛ لون داكن محايد أساسي

كحلي حبري
كحلي عميق؛ بديل انتقائي

عنابي داكن
عنابي داكن؛ لون مميز

طيني
تيراكوتا محروقة؛ لمسة دافئة

بني شوكولاتة
بني شوكولاتة محروق؛ لون محايد داكن دافئ

أخضر أوبجيكت
لون العلامة المميز

الألوان المعروضة تقريبية على الشاشة. تأكد من العينات الفعلية للدهان قبل الإنتاج.

التشطيبات


نظام الدهان، لمعة الدهان، وتشطيب المعدن المكشوف.

الأسطح المدهونة

نظام الدهان


طلاء بودرة إلكتروستاتيكي	**دهان دوكو**

لمعة الدهان مطفي أو لامع، حسب نظام الدهان المختار



مطفي

إضاءة ناعمة ومتجانسة بلا انعكاسات حادة.




لامع

انعكاسات حادة ولون أعمق.

الرسوم توضيحية تقريبية وليست صورا لعينات فعلية.

المعدن المكشوف

تشطيب المعدن المكشوف مصقول بالفرشاة أو مرآة

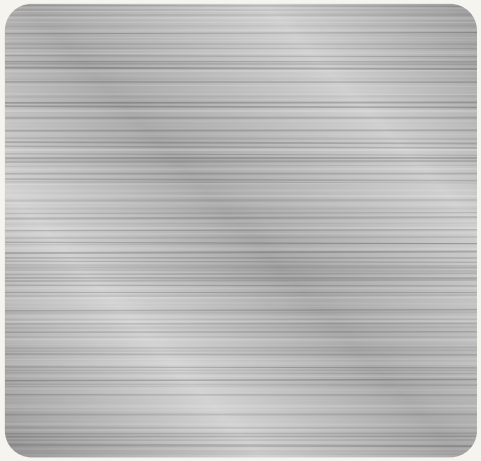

مصقول بالفرشاة

حبيبات اتجاهية دقيقة ولمعان ناعم.



مرآة

سطح مصقول وعاكس.

كيف تكتب مواصفات التشطيب

نظام الدهان + اللون + اللمعة. يحل محل عبارة «لاكر مطفي/لامع» العامة.

نظام الدهان + اللون + اللمعة



طلاء بودرة إلكتروستاتيكي · Carbon · مطفي


مثال على المواصفات



دوكو · Oxblood · لامع

مثال على المواصفات

المجموعة بين المطفي واللامع

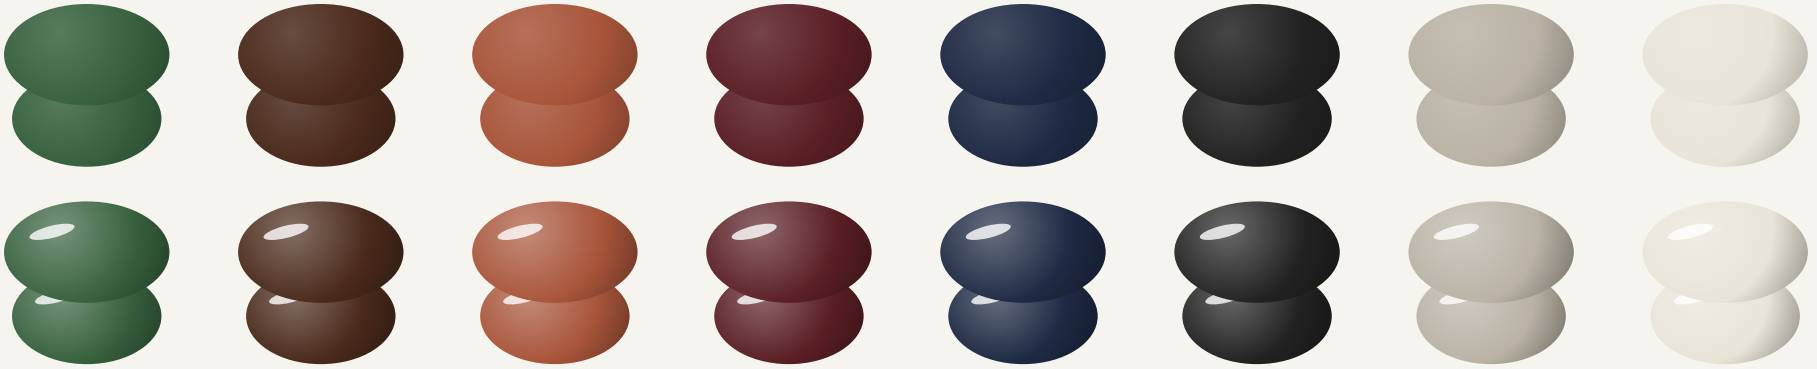

الأشكال رسوم عامة للون والتشطيب فقط، وليست تصميم منتج.

دليل خلط الألوان

تركيبات مبدئية للتجربة الأولى. عدلها بالمقارنة مع عينة فعلية.

اللون	التركيبة المبدئية (أجزاء بالوزن، المجموع 100)
عاجي Bone	أبيض 98 أصفر أكسيدي 1.3 أومبر خام 0.7
رمادي حجري Putty	أبيض 83 أومبر خام 11 أصفر أكسيدي 4 أسود 2
أسود فحمي Carbon	أسود 95 أبيض 5
كحلي حبري Ink	أزرق ألترامارين 62 أسود 20 أبيض 18
عنابي داكن Oxblood	أحمر قرمزي 62 أومبر محروق 28 أسود 10
طيني Clay	أحمر أكسيدي 55 أصفر أكسيدي 15 أبيض 30
بني شوكولاتة Chocolate	أومبر محروق 88 أحمر أكسيدي 10 أسود 2
أخضر أوبجيكت Objekt Green	أخضر فثالو 22 أصفر أكسيدي 30 أبيض 42 أومبر خام 6

كيف تجرى التجربة

١. ابدأ بكمية صغيرة. اخلط 100 جم، وزن كل صبغة بميزان دقة 0.01 جم، وسجل كل إضافة.

٢. أضف الأصباغ الداكنة في النهاية وبكميات صغيرة، فهي تطغى بسرعة.

٣. جرب لوحة اختبار على نفس المعدن والبرايمر وعدد الطبقات كما في الإنتاج، واتركها تجف تماما قبل الحكم. الدهان المبلل يختلف عن الجاف.

٤. قارن في ضوء النهار بجوار عينة فعلية، وليس على الشاشة فقط.

٥. طابق اللمعة أولا. اللامع يبدو أعمق وأغمق من المطفي بنفس اللون.

٦. عدل بمقدار نصف جزء، وأعد المجموع إلى 100، ثم اختبر مجددا. احتفظ بالتركيبة الناجحة مع اسم الماركة ورقم الدفعة.

يمكن تلوين دوكو والدهانات السائلة الأخرى في الورشة أو عند محل دهانات. أما طلاء البودرة فيطابق عادة لدى مصنع البودرة، لذا أرسل رمز HEX والعينة والتشطيب إلى المورد لمطابقة مخصصة.

تختلف أسماء الأصباغ وقوتها حسب الماركة. اعتبر هذه الأرقام نقطة بداية وليست وصفة نهائية.