

Series R19

Power Rocker Switches

SPECIFICATIONS:

CONTACT RATING: 10A 125V AC 6A 250VAC.
ELECTRICAL LIFE: 20,000 cycles.
MECHANICAL LIFE: 50,000 cycles.
CONTACT RESISTANCE: 50mΩ.
INSULATION RESISTANCE: DC 500V 100MΩ min.
DIELECTRIC STRENGTHS: AC 1500V 1 min.

MATERIALS:


HOUSING: 66 Nylon(UL 94V-2).
ACTUATOR: 66 Nylon(UL 94V-2).
MOVABLE CONTACTS: Copper, silver plated.
STATIONARY CONTACTS: Copper, silver plated.
TERMINALS: Copper, silver plated.
CONTACT SPRING: Music wire.

Specifications and Dimensions subject to change




PANEL CUTOUT

Model No.	Type
R-208A	SPST ON-OFF
R-208B	SPST ON-OFF ILLUMINATED
R-208C	SPDT ON-ON
R-208E	SPST ON-(OFF)

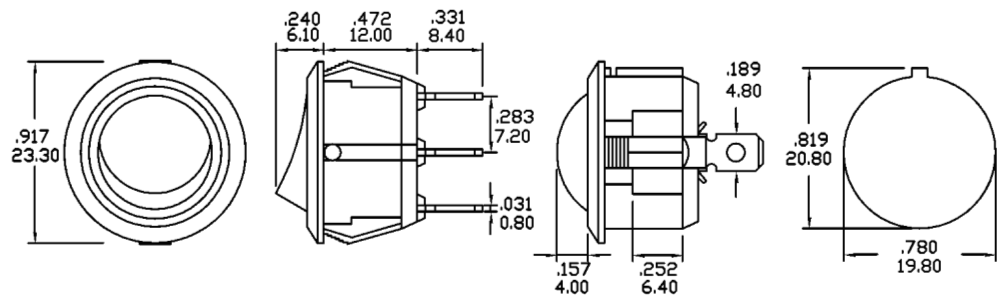

PANEL CUTOUT

Model No.	Type
R-112	SPDT ON-ON
R-112A	SPST ON-OFF
R-112B	SPST ON-OFF (ILLUMINATED)
R-112C	SPDT ON-OFF-ON
R-112L	SPST ON-OFF (ILLUMINATED)

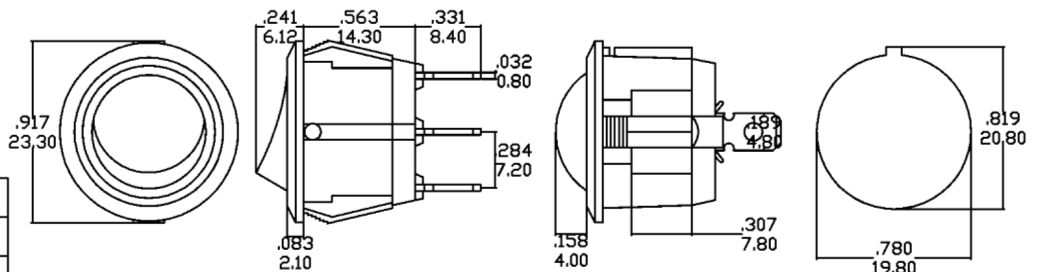


* With T4 Actuator


* With T3 Actuator

ACTUATOR OPTIONS


T1



T2




T3



ILLUMINATED


T4




ILLUMINATED

ACTUATOR OPTIONS

T5



T6



COLOR OPTIONS

Rocker/Lens Color			
1	White/Milky	6	Red
2	Black	7	Orange/Amber
3	Charcoal Gray	8	Green
4	Lt. Gray	9	Blue
5			

Body Color	
A	White
B	Black
C	Charcoal Gray
D	Light Gray

HOW TO ORDER

