

PROJECT BUTTON HR–V0 DYNAMIXEL STAR INJECTION BOARD


U2D2 pin 2 omitted; three protected positive rails remain isolated; common TTL DATA and return only.

01 Three–branch DYNAMIXEL TTL star injection

File: 01_star_injection.kicad_sch

01 Three-branch DYNAMIXEL TTL star injection

One fixed board shares DATA/return and keeps all three protected positive rails separate.

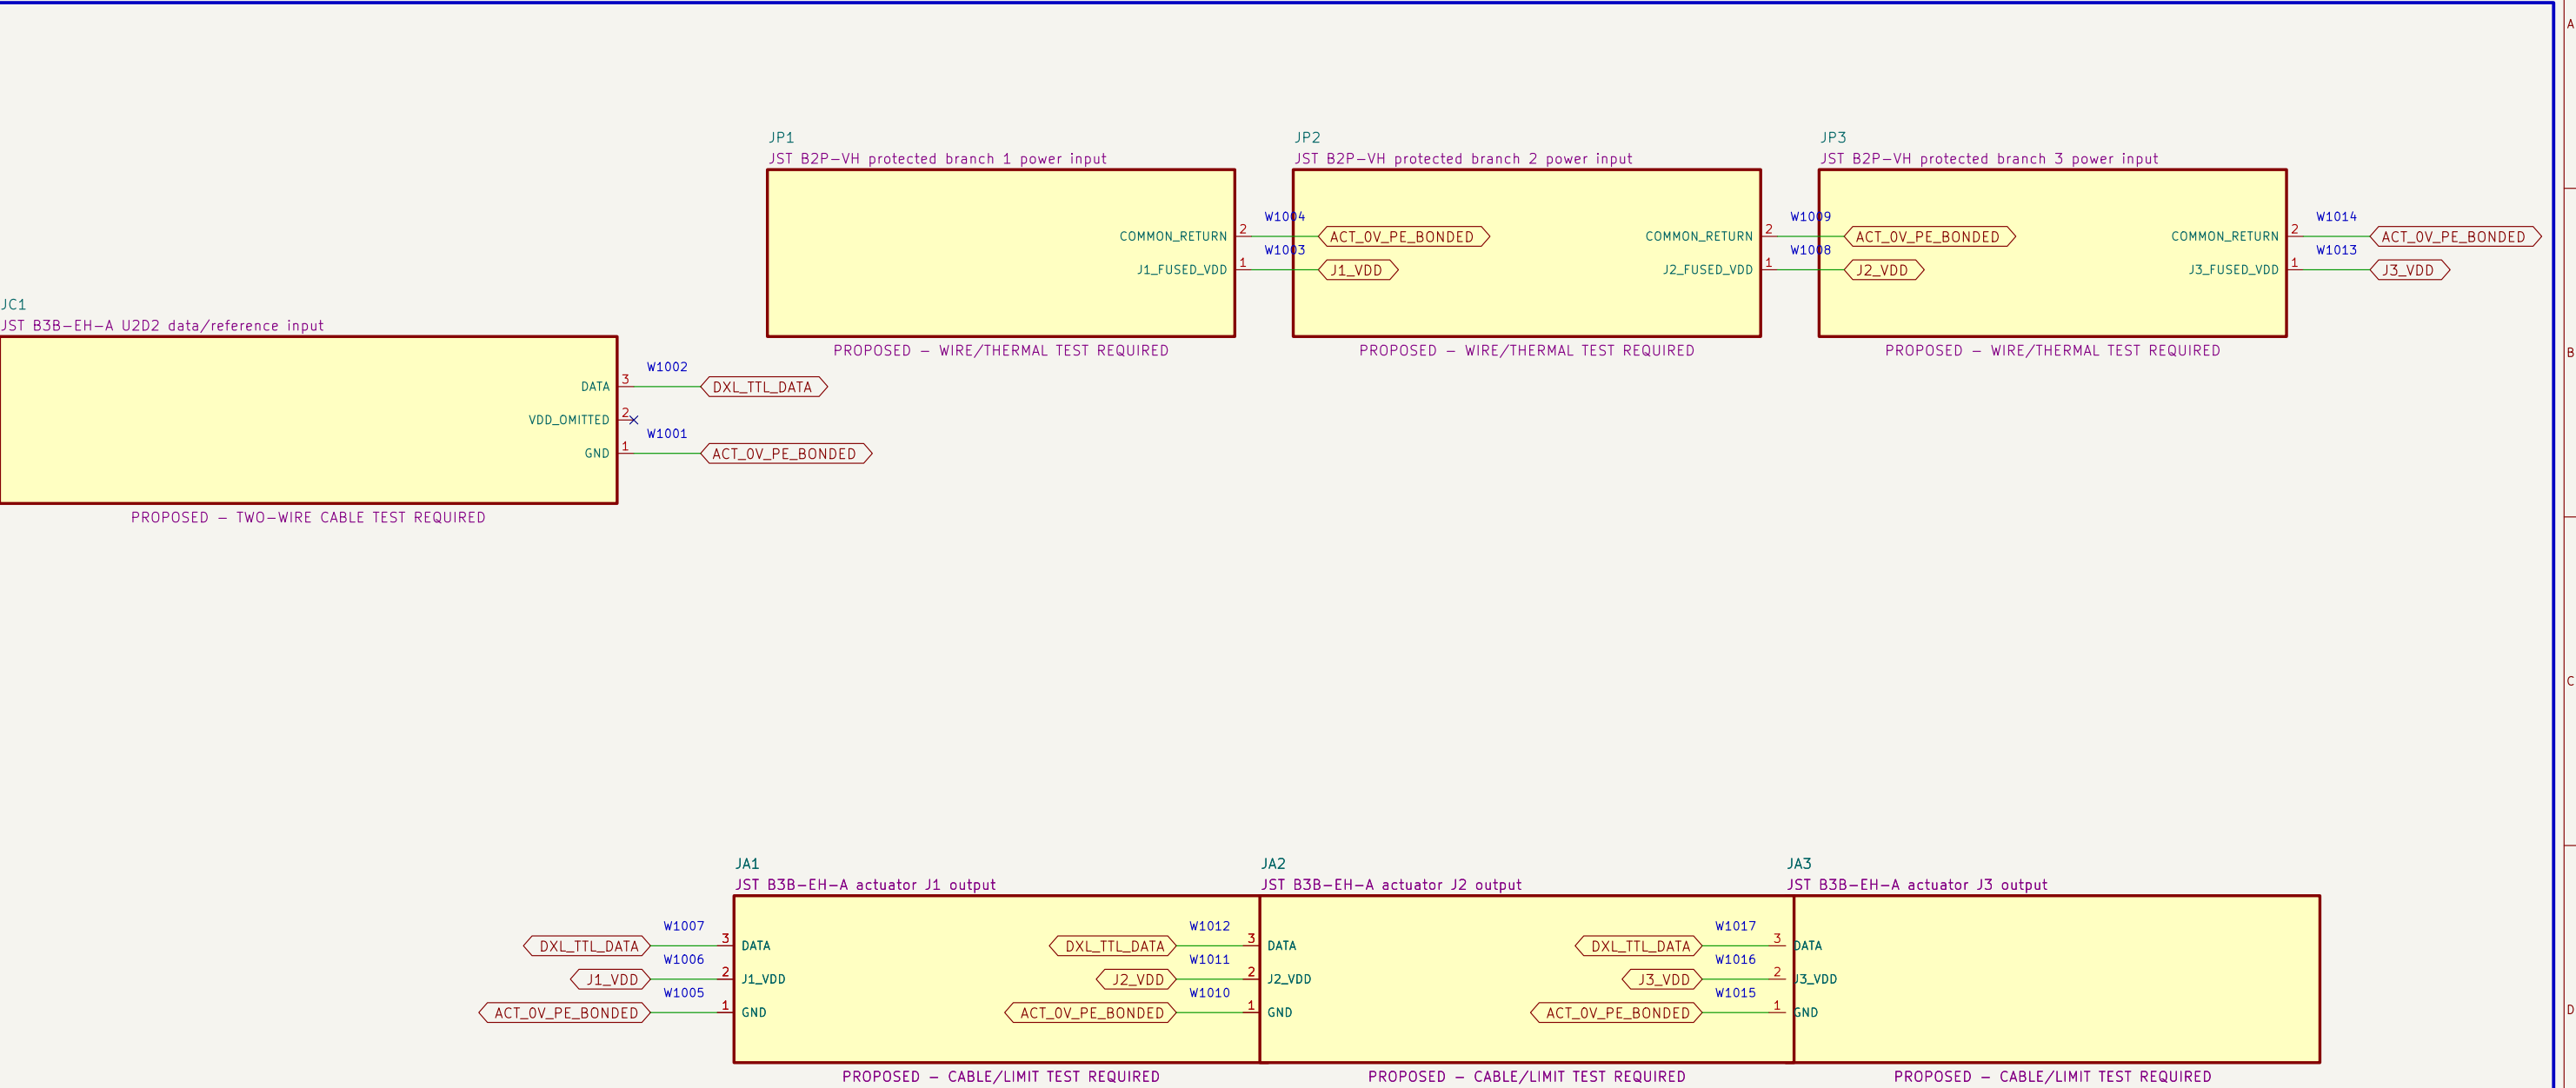

NOTE 1: JC1 pin 2 has no PCB net or route; the controller cable shall leave cavity 2 empty.

NOTE 2: J1/J2/J3 VDD never join; common return and PE/fault paths require qualified review.

NOTE 3: Validate star-DATA waveforms at released cable lengths, loads and baud rate.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED		
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION		
Project Button		
Sheet: /01 Three-branch DYNAMIXEL TTL star injection/ File: 01_star_injection.kicad_sch		
Title: PB HR-V0 DXL-STAR-P0.1 – 01		
Size: A3	Date: 2026-08-07	Rev: DXL-STAR-P0.1
KiCad E.D.A. 10.0.5		Id: 2/2