

PROJECT BUTTON HR–V0 DYNAMIXEL STAR INJECTION BOARD

U2D2 pin 2 omitted; three post–limiter positive rails remain isolated; common TTL DATA and return only.

01 Three–branch DYNAMIXEL TTL star injection

File: 01_star_injection.kicad_sch

V2.1 PRESERVED; V3 IS A CONNECTED CANDIDATE
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION
Project Button


Sheet: /
File: hr–v0–dxl–star–p0.2–carrier–candidate.kicad_sch

Title: PROJECT BUTTON HR–V0 DYNAMIXEL STAR INJECTION BOARD index

Size: A3	Date: 2026–08–08	Rev: DXL–STAR–P0.2–CARRIE
KiCad E.D.A. 10.0.5	Id: 1/2	

01 Three-branch DYNAMIXEL TTL star injection

One fixed board shares DATA/return and keeps all three post-limiter positive rails separate.

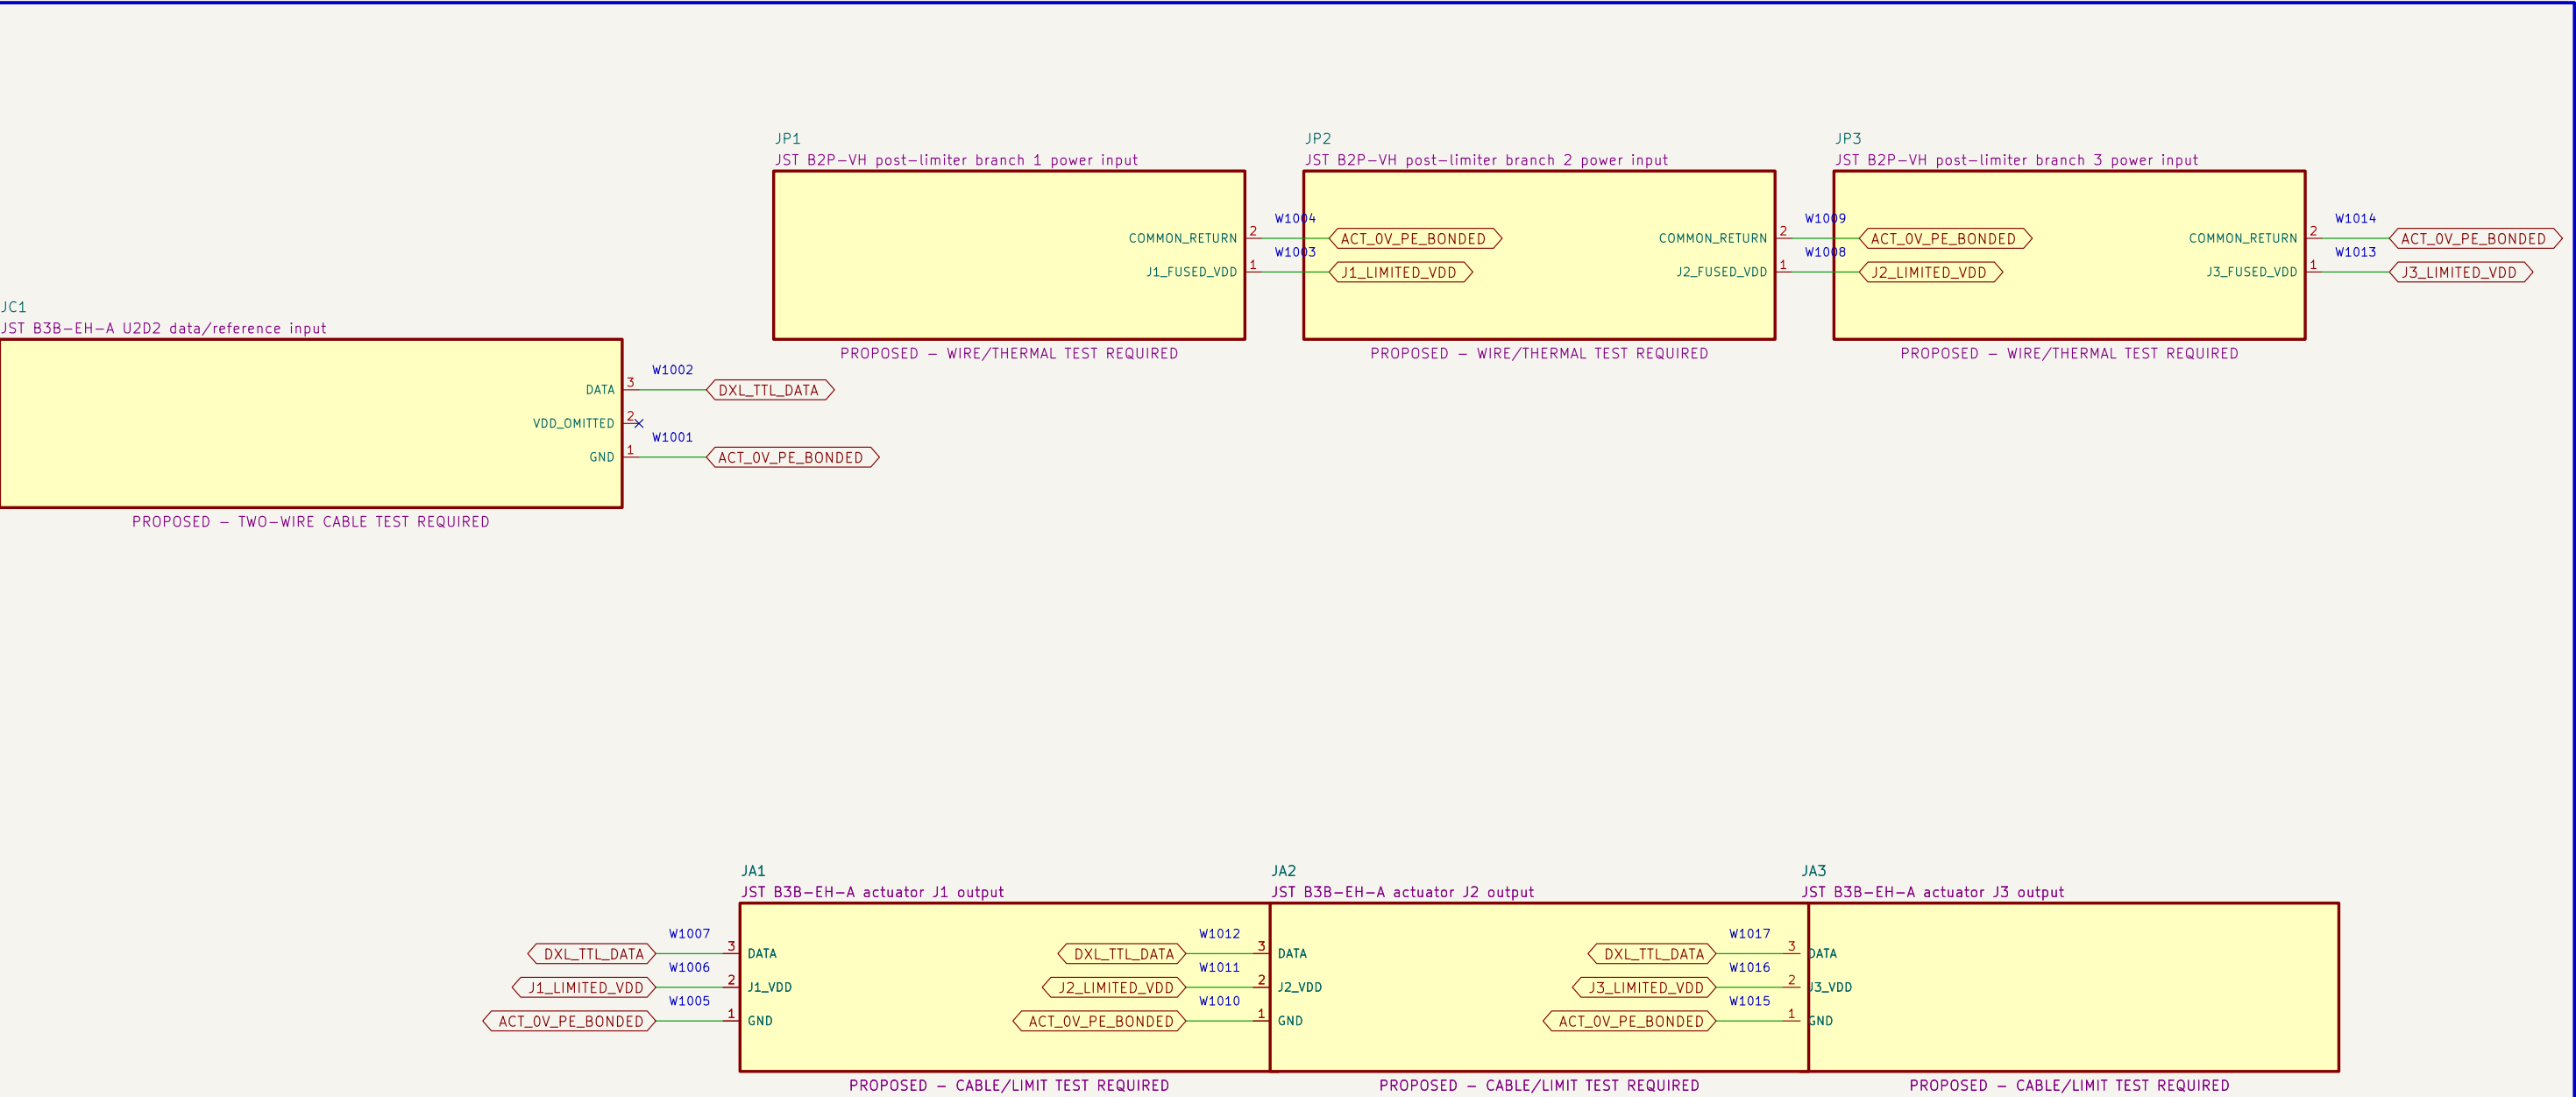

NOTE 1: JC1 pin 2 has no PCB net or route; the controller cable shall leave cavity 2 empty.

NOTE 2: J1/J2/J3 VDD never join; common return and PE/fault paths require qualified review.

NOTE 3: Validate star-DATA waveforms at released cable lengths, loads and baud rate.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED		
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION		
Project Button		
Sheet: /01 Three-branch DYNAMIXEL TTL star injection/ File: 01_star_injection.kicad_sch		
Title: PB HR-VO DXL-STAR-P0.2-CARRIER-CANDIDATE – 01		
Size: A3	Date: 2026-08-08	Rev: DXL-STAR-P0.2-CARRIE
KiCad E.D.A. 10.0.5		Id: 2/2