

PROJECT BUTTON HR–30 AUXILIARY POWER MODULE

Two isolated 30 W rails plus one isolated 40 W HMI rail; protection and validation open.

01 COMPUTE isolated 5 V rail

File: 01_compute_rail.kicad_sch

02 HMI isolated 5 V rail


File: 02_hmi_rail.kicad_sch

03 CONTROL isolated 5 V rail

File: 03_control_rail.kicad_sch

01 COMPUTE isolated 5 V rail

Physical module and connector candidates; input protection and validation open.

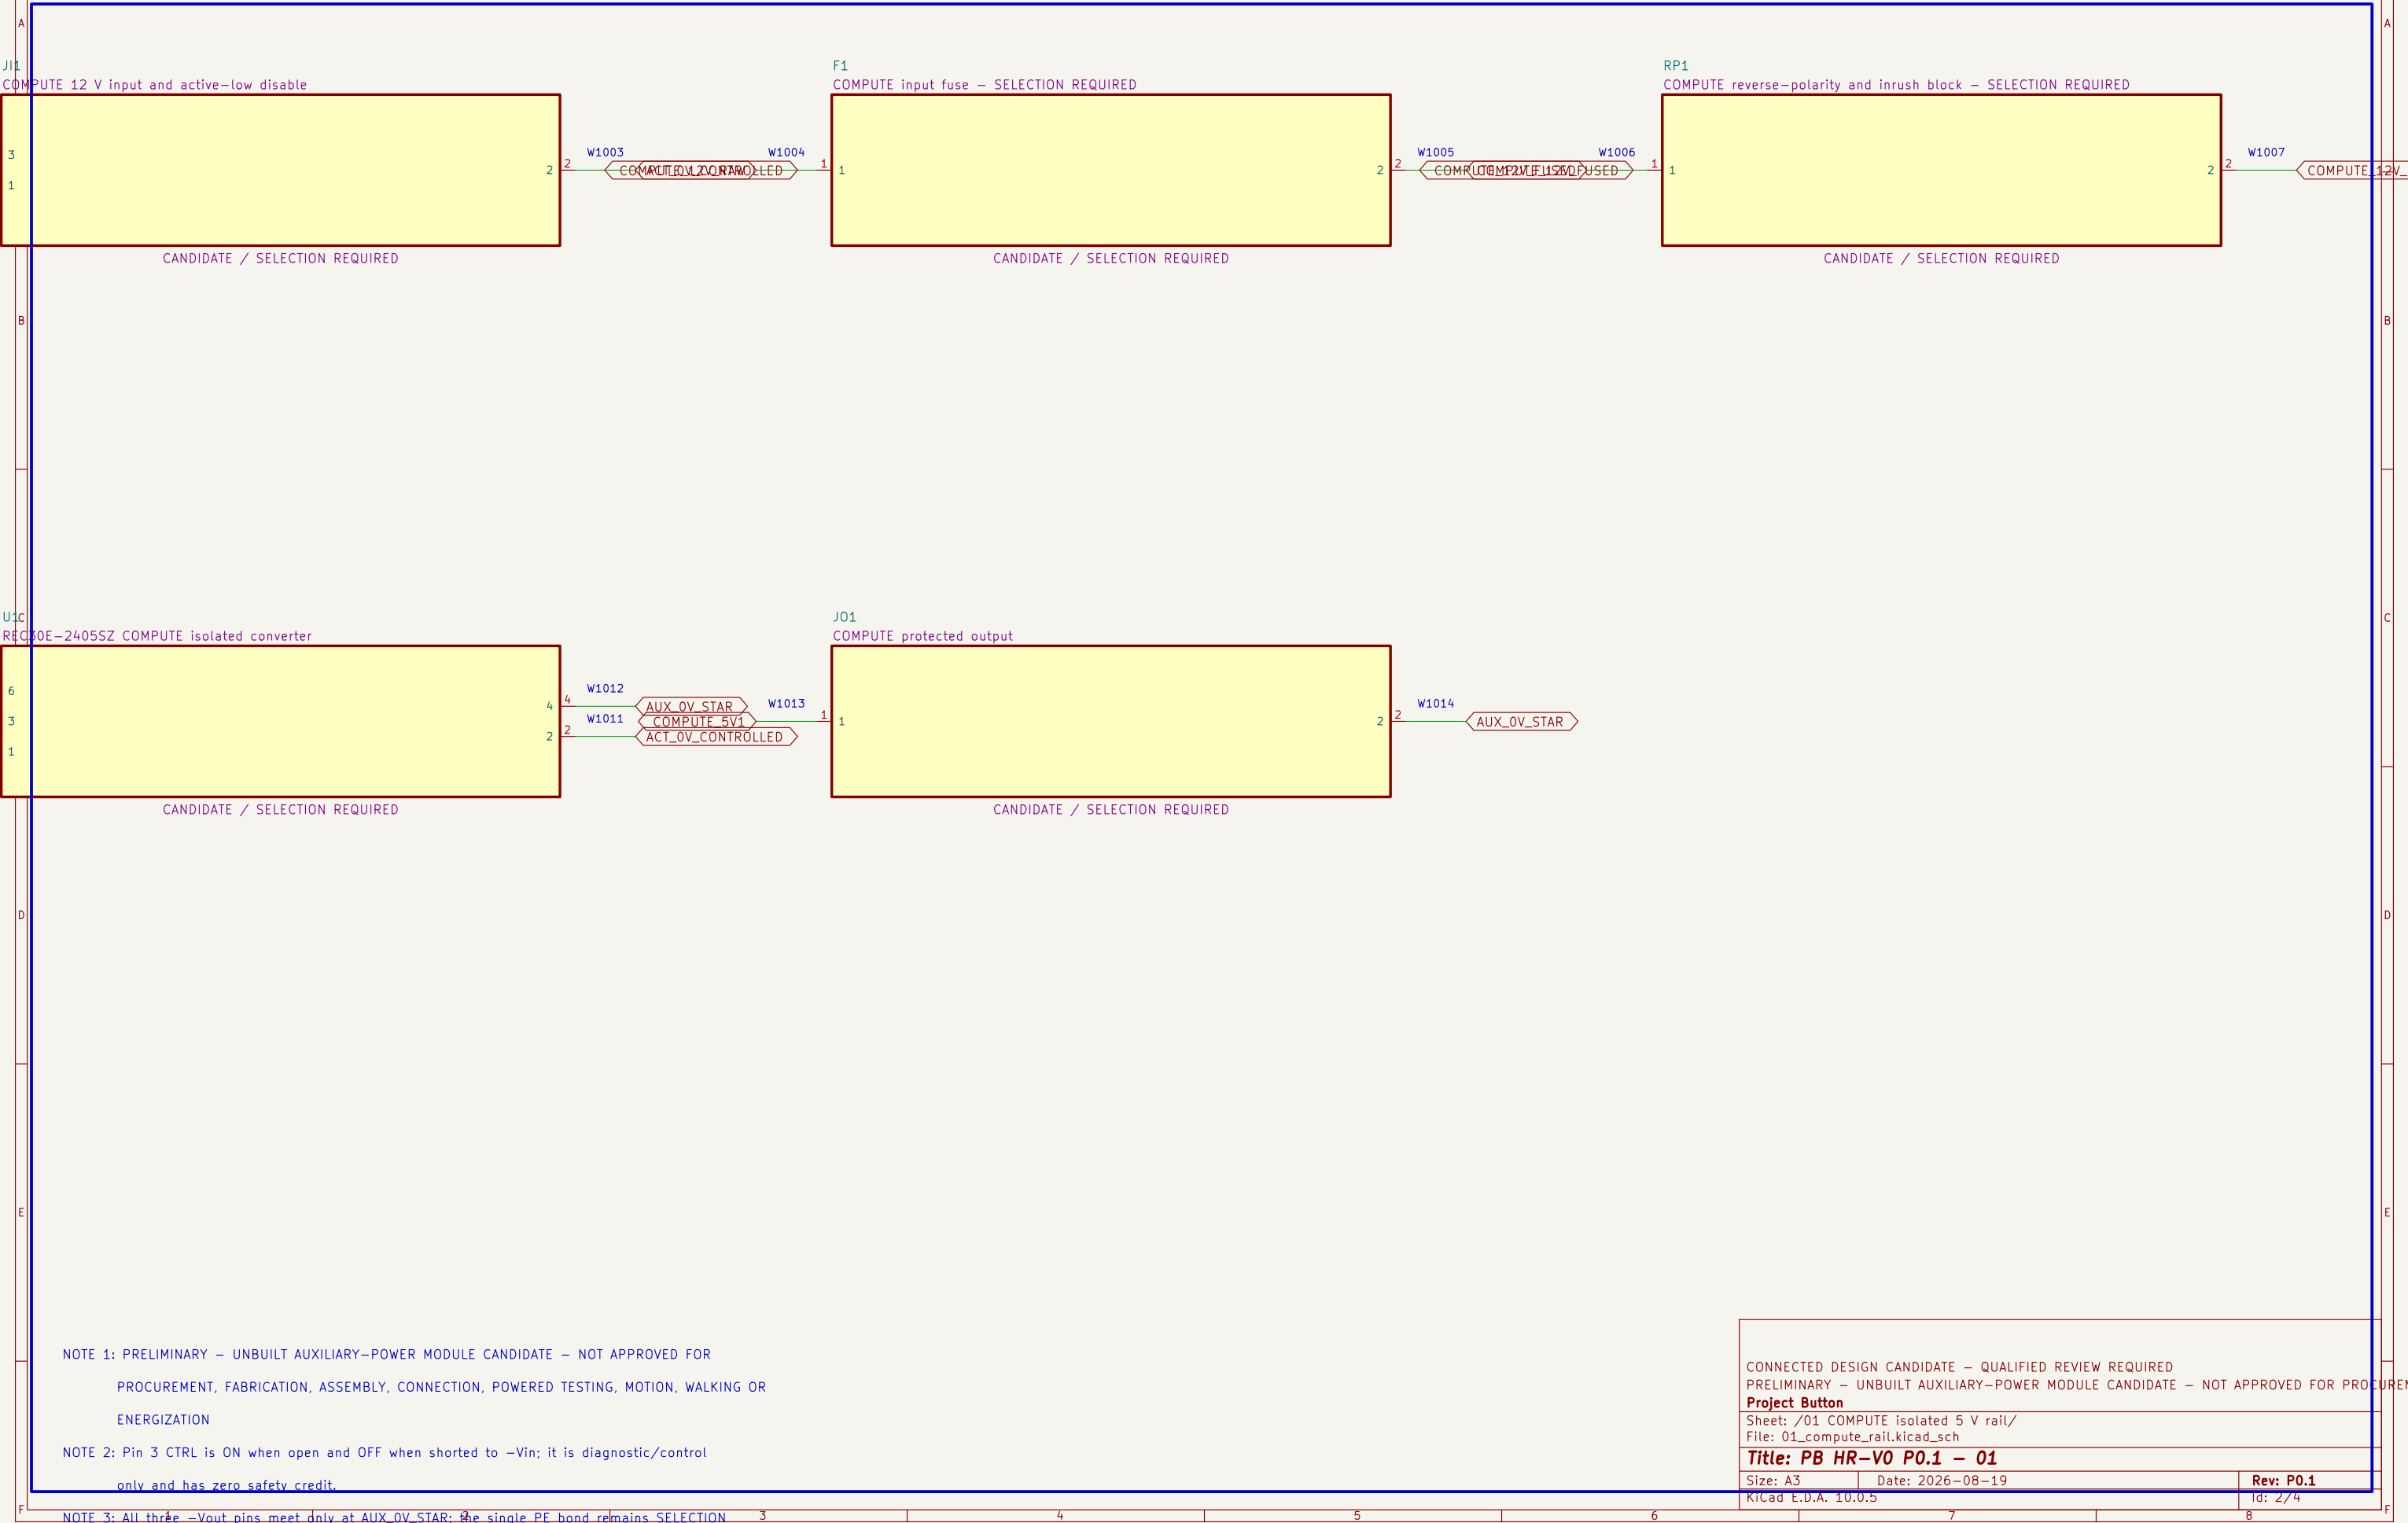

NOTE 1: PRELIMINARY – UNBUILT AUXILIARY–POWER MODULE CANDIDATE – NOT APPROVED FOR PROCUREMENT, FABRICATION, ASSEMBLY, CONNECTION, POWERED TESTING, MOTION, WALKING OR ENERGIZATION

NOTE 2: Pin 3 CTRL is ON when open and OFF when shorted to –Vin; it is diagnostic/control only and has zero safety credit.

NOTE 3: All three –Vout pins meet only at AUX_OV_STAR; the single PF bond remains SELECTION REQUIRED.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – UNBUILT AUXILIARY–POWER MODULE CANDIDATE – NOT APPROVED FOR PROCUREMENT, FABRICATION, ASSEMBLY, CONNECTION, POWERED TESTING, MOTION, WALKING OR ENERGIZATION

Project Button

Sheet: /01 COMPUTE isolated 5 V rail/
File: 01_compute_rail.kicad_sch

Title: PB HR–V0 P0.1 – 01

Size: A3Date: 2026–08–19Rev: P0.1

KiCad E.D.A. 10.0.5Id: 2/4

03 CONTROL isolated 5 V rail

Physical module and connector candidates; input protection and validation open.

