



ASR6501 CIRCUIT

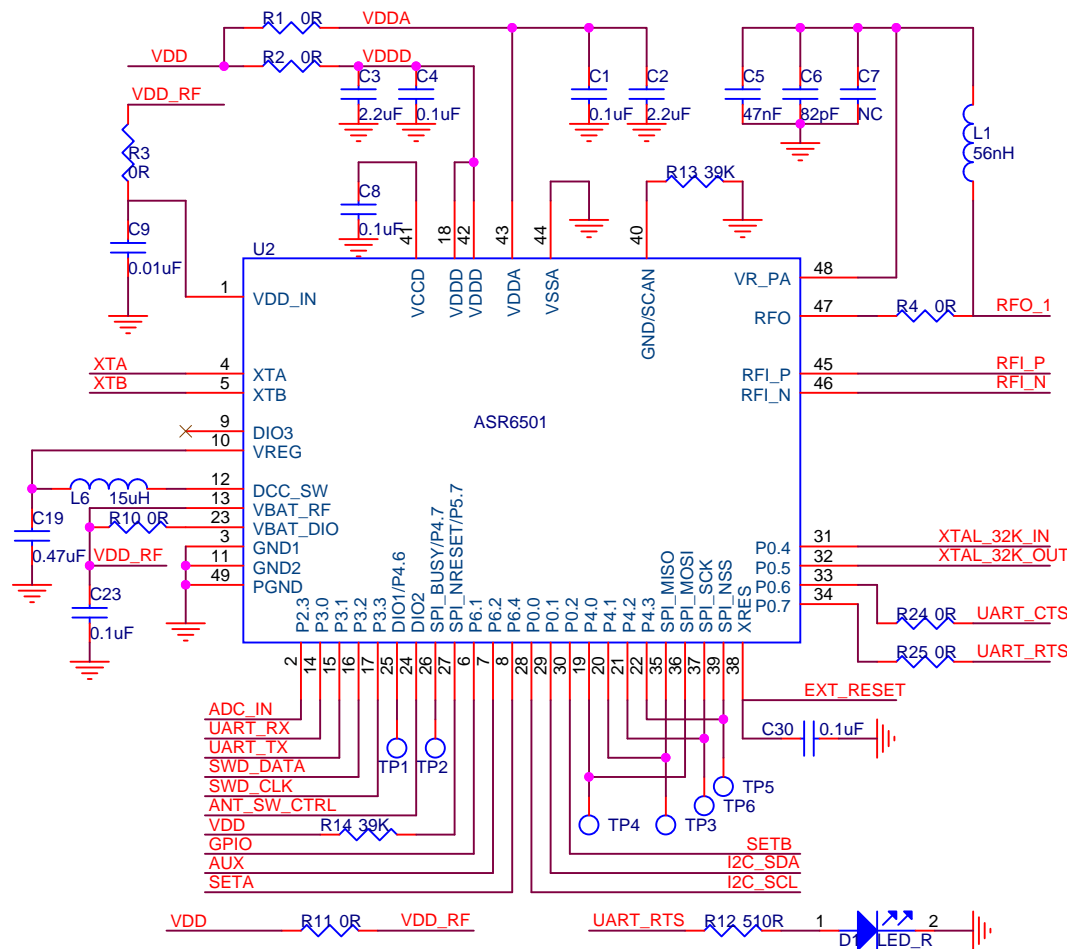


Note: Consider SETA, SETB, AUX as GPIO, which could be defined in the SW

Crystal Oscillator Circuit:
 1) 32MHz TCXO/XO for LoRa can use TCXO or XO.
 BW higher than 62.5K, recommend XO (refer to U6)
 2) 32.768kHz XO for MCU.
 The loading CAPS 18pF and 36pF must be added

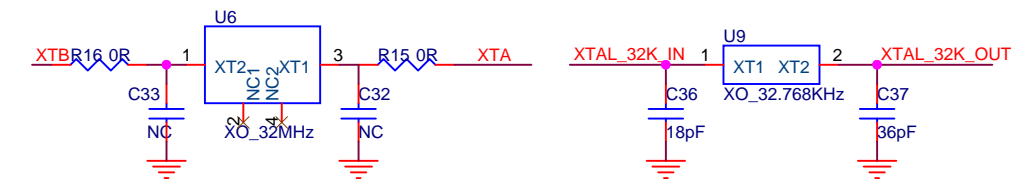

RF Input and Output Circuit

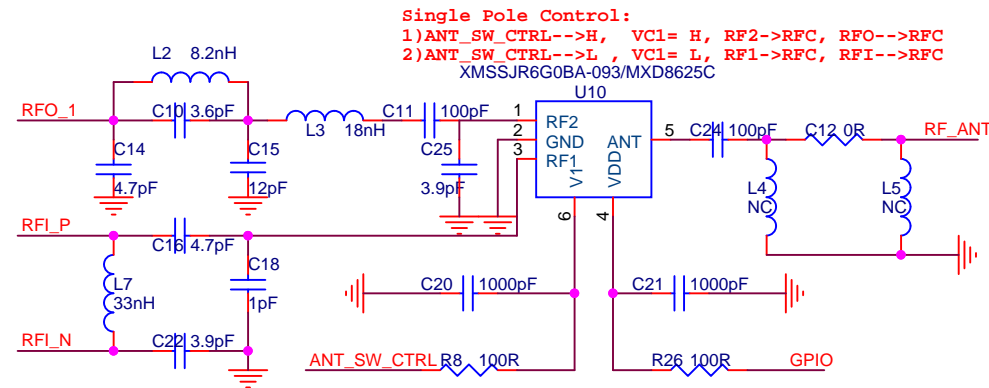

MODULE INTERFACE

