

Spectrum Sensing for Detection and Radiolocation of UAS

Alexander M. Wyglinski², Jonathan M. Peck¹, Rachel Kinney¹, Narut Akadejdechapanich², Scott Iwanicki², Max Li², Kyle Piette², and Jonas Rogers²

¹Gryphon Sensors, LLC, North Syracuse, NY 13212

²Worcester Polytechnic Institute, Worcester, MA 01609

Unmanned Aircraft Systems (UAS), commonly known as drones, are increasingly found in the National Airspace (NAS). However, the use of UAS is not appropriate in all areas or situations. Locating UAS within the airspace is critical for safe integration of UAS into the airspace. Many sensors that can locate UAS have difficulty differentiating between drones and other small objects in the air, such as birds. This paper presents a ground based spectrum sensor system as a solution to this problem. A spectrum sensor exploits signals emitted by UAS and related equipment for command and control, video, and telemetry data. Detection algorithms are utilized to isolate signals that are emitted by UAS. Following this detection, radiolocation is used to provide the location of the UAS. Similar systems used traditionally in manned aviation are discussed.

Index Terms—Spectrum Sensing, UAS (Unmanned Aircraft Systems), Radiolocation, ATM (Air Traffic Management), SDR (Software Defined Radio), SAA (Sense and Avoid), DAA (Detect and Avoid), Non-cooperative Sensors.

I. INTRODUCTION

THE use of Unmanned Aircraft Systems (UAS), commonly known as drones, is proliferating in the consumer and business markets. The global commercial drone industry is expected to be \$14.9 billion in 2020, with a compound annual growth rate (CAGR) of 8.12% year on year [1]. As with traditional aviation, there are safety hazards and privacy concerns with the use of this type of aircraft. To address these concerns and the impending explosion of UAS in the NAS, surveillance of the airspace can monitor the location of objects in the sky, including UAS and manned aircraft. Sensors that provide surveillance data must operate at all hours and in all weather conditions when visibility is reduced. Furthermore, UAS operate at low altitudes where many traditional aviation surveillance sensors cannot detect.

Objects in the airspace are placed into two categories of interest as described in this paper: cooperative and non-cooperative. Generally, cooperative objects in the airspace are aircraft that are able to determine their own precise geographic location and report it. Position reporting is traditionally done through a transponder such as ADS-B. However, other wireless technologies have been utilized in UAS for the purpose of position reporting. The term non-cooperatives encompasses a broad set of objects in the sky that are not equipped with a transponder. This includes unequipped manned aircraft, UAS, and birds. This paper only addresses detecting non-cooperatives in the airspace for the safe integration of UAS in the airspace.

Safe integration is used in this paper to describe the safe and harmonious coexistence of manned and unmanned aircraft in the airspace. It is important to note that from a legal standpoint UAS are aircraft. The Federal Aviation Regulation Section 91.113 dictates that an aircraft must be able to see and avoid other aircraft. Current federal regulations such as

Part 107 restrict operation of UAS to line-of-sight to the remote pilot. This limits the types of operations that a UAS can undertake. Exceptions to the line-of-sight requirement are granted on a case-by-case basis and must satisfy the see and avoid requirement in other ways. This can be accomplished by using sensors for detect and avoid (DAA).

This paper is organized as follows. First, a literature review of sensors used to detect UAS is provided. The following section defines spectrum sensing, citing recent literature. Elements of a spectrum sensor system are then discussed, along with the heritage of using similar systems in manned aviation. Experimental data is presented that demonstrates the use of a spectrum sensor system to locate a UAS. The paper concludes with a discussion of the limitations of a spectrum sensor system and identifies areas that merit research.

II. UAS DETECTION METHODS IN LITERATURE

There are two main categories of sensors used to detect objects in the sky: airborne and ground-based. Airborne sensors are installed on the UAS and are used to sense and avoid other UAS [10]. These types of systems aim to replicate a cockpit view for a pilot or an autopilot system. Ground-based sensors are used to collect surveillance data and are traditionally part of a fixed infrastructure. There are various sensor types discussed in literature for both airborne and ground-based applications. These include LiDAR, optical sensors, thermal infrared sensors, acoustic sensors, and radar. Brief overviews of different sensors types can be found in [10] and [13]. A more comprehensive discussion of each sensor is provided below.

Light detection and ranging (LiDAR) is one technology that has emerged in airborne DAA applications. LiDAR uses a small light or laser shined at the surface of an obstacle and measures the time it takes for the beam to be reflected to its source. The advantage of LiDAR is that the high level of accuracy enables highly accurate estimations of range and

velocity of obstacles. The main drawback of LiDAR is the small volume that it can detect UAS due in part to a narrow field of view. LiDAR systems performance is degraded by non-ideal weather conditions, such as rain, fog, mist, snow, and dust. Furthermore, the laser emissions by airborne LiDAR systems may be hazardous to manned aircraft [14]. Optical sensor, such as EO/IR cameras, have emerged as a promising technology for UAS detection and collision avoidance both in the air and on the ground. In airborne applications, these sensors provide real-time information on obstructions within the UAS flight path. On a UAS, the performance of these systems is constrained by cost, computational resources, and resolution [10]. Ground-based camera systems have also been proposed for detection of UAS. These systems detect UAS by finding the horizon in order to find objects in the sky [11]. Optical sensors have similar limitations as LiDAR in non-ideal weather conditions. Additionally, their performance is severely degraded in darkness. The performance of optical sensors are limited by the size of the UAS and the processing available. They have limited performance in tracking multiple targets simultaneously over a wide field of view.

Thermal infrared sensors work much like a camera system. They have a narrow field of view and provide real-time information. Detection requires a UAS to emit heat. Compared to the propulsion systems of manned aircraft, many UAS radiate far less heat and could be confused with birds. Airborne thermal infrared sensors have also been proposed for obstacle avoidance. In one instance, it has been demonstrated to supply detection data in an indoor environment [15]. The key issues with thermal detection include cost, detection distance, and probability of detection.

Acoustic sensors detect the noise produced by a UAS. Airborne acoustic sensors are effective because they provide intruder detection from all directions [10]. Ground-based acoustic sensors have been demonstrated to be able to detect UAS up to 600 meters and estimate the angle of arrival [12]. In fact, the use of ground based acoustic sensors for the detection of aircraft dates back to before World War I [CITATION NEEDED]. The limitations of acoustic systems are their limited range and degradation of performance in high noise environments.

Airborne radar systems have been proposed for DAA on UAS. They can provide an adequate range and field of view for DAA. Airborne radar systems for UAS applications must be small, lightweight, and inexpensive. Ground-based radars require no additional equipment on the UAS, saving payload for the primary mission. Ground-based radars survey a large volume and can cover multiple UAS. They also serve as a redundant source of position/velocity of craft if communications are lost. Detection of both cooperative and non-cooperative aircraft is possible with either type of radar system. The range of the radar system, both airborne and ground based, is limited by the available power, size of the UAS, and the availability of line-of-sight. The merit of radio frequency detection for detection of UAS has been identified [13]. However, radio frequency based detection methods are not well represented in literature. The main contribution of this paper is how to use radio frequency detection methods using a method called

spectrum sensing.

III. WHAT IS SEPECTRUM SENSING?

Spectrum sensing is a form of radio frequency detection. It has its roots in cognitive radio. Cognitive radio is generally defined as having the follow functions [6]:

- Flexibility and agility to change its operational parameters on the fly such as frequency, waveform, and bandwidth
- Learning and adaptability to change parameters based on an analysis of the situation
- Sensing to observe and measure spectrum usage

Spectrum sensing is used to provide awareness of the spectrum usage in a given location. In cognitive radio systems, this information is called spectrum opportunities. This term is used due to how this information is traditionally used in a cognitive radio, which is to identify unused spectrum resources that the cognitive radio can use for communication. In addition to cognitive radio, spectrum sensing has been used for other applications. One example is in 802.11 where spectrum sensing is used as part of the medium access control mechanism.

There are various approaches to spectrum sensing. Spectrum sensing can be done independently or collaboratively between sensors. There are various algorithms for spectrum sensing such as energy detection, matched filtering, and cyclostationarity analysis [7]. The aim of these algorithms is to measure the radio frequency energy in one or more domains. The domains of spectrum usage includes time, frequency, space, angle, and code.

IV. SPECTRUM SENSING APPLIED TO UAS

With regard to UAS detection, spectrum sensing is used for identifying spectrum usage by UAS in a specific area. Spectrum usage is determined by exploiting wireless signals of opportunity emitted by drones. A priori knowledge is utilized to assist in spectrum sensing for UAS in both the frequency and time domain. Once a signal belonging to a UAS is detected through spectrum sensing, the location of the UAS can be estimated through radiolocation techniques.

A. Signals of opportunity emitted by UAS

Signals of opportunity emitted by UAS are from wireless communications used in UAS. We will only focus on wireless communications used in civil UAS in this discussion. Currently, there is no single wireless communication protocol that is used in civil UAS. This lack of standardization on a single wireless standard for UAS has led to various wireless technologies being used to satisfy the communication requirement for UAS. Both proprietary and standardized communication protocols are used on UAS. The type of wireless communication required depends on the UAS use case. Visual line of sight (VLOS) requires the UAS to be within the unaided sight of a remote pilot. Beyond visual line of sight (BVLOS) means that the UAS is flying without the remote pilot having the UAS within visual line of sight at all times. Autonomous UAS are self-guided and do not need to have a remote pilot in control

TABLE I
THE USE OF WIRELESS COMMUNICATION IN UAS

UAS Use Case	Wireless Communications		
	Command and Control	Telemetry	Video
VLOS	Required	Optional	Optional
BVLOS	Required	Required	Optional
Autonomous	Required	Optional	Optional

of the craft. The types of wireless communications for each UAS use case is summarized in Table 1 below.

Command and control is used for a remote pilot to direct a UAS. Command and control communication requires a low bitrate. [9]. As is demonstrated in the literature, there are a variety of frequency bands between 35MHz and 6GHz that are used by command and control data links. Small UAS typically use traditional remote control radios that often utilize the unlicensed 2.4 GHz band [2]. The emission source for command and control is the ground control station (GCS).

Telemetry is another low bitrate communication found on a UAS. This information is used to monitor the flight of a UAS. Typical data payloads include the GPS position, IMU measurements, speed, altitude, battery and other status. There are various defined protocols described in [2]. The emission source for telemetry is the UAS.

Live video transmissions is often found on UAS to aid in navigation. Video communication requires a high bitrate radio system. These video transmissions can either be on dedicated hardware or combined with telemetry and command and control hardware. Dedicated video transmitters are often implemented in the 5.8 GHz band. A popular technology used for video links includes 802.11a/b/g/n due to the ease of implementation [2]. The emission source for video is the UAS.

Some wireless technologies can serve multiple communication needs on a UAS. For example, 802.11 meets the bitrate requirements for command and control, telemetry, and video combined. Cellular technology such UMTS and LTE have been demonstrated to do this as well. With these wireless technologies the source of the wireless transmissions isn't always clear. However, separation of emissions from the UAS and GCS is possible due to the multiplexing of the signals.

B. Spectrum Sensing Algorithms for UAS

As shown in Figure 1, there are various domains in which spectrum sensing can be applied. For UAS, spectrum sensing detection methods are best implemented in either the time domain or frequency domain. This is due to the high level of a priori knowledge that can be collected on UAS wireless links. This information can be gathered from off-the-shelf test equipment, such as a spectrum analyzer. The spectrum sensing detection algorithms should be implemented in whichever domain there exists a greater understanding of the signal. For example, if the spectral shape of the signal is well known, but it is unknown if there is any periodic time domain data, such as training data, then a correlation detector (matched filter) implemented in the frequency domain is the optimal detector.

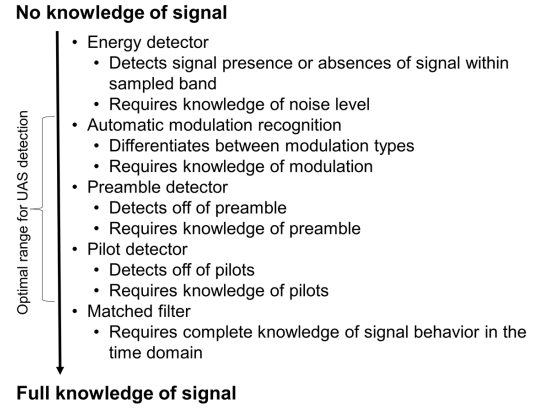


Fig. 1. Spectrum Sensing Algorithms.

On the other hand, if the spectral characteristics are more random, but signal contains periodic data, such as training data, then time domain detection methods are better.

In some cases, more than one detection method may be appropriate for a signal. Detection methods in one domain may be dependent of knowledge that can be gained by a detector in the other domain. In many cases, time domain detectors require knowledge of the carrier frequency of the signal. This knowledge can be gained using a frequency domain detection method.

Energy detection, a spectrum sensing method commonly used by cognitive radios, is most appropriate if there is little or no knowledge of the signal transmitted. A matched filter (correlator) is the optimal detection method if the spectrum sensor has complete knowledge of signal transmitted. Some spectrum sensing algorithms, such as matched filtering, provide processing gain that increases detection range. Through proper analysis and characterization, the amount of knowledge of transmitted waveforms is somewhere in between the extremes.

Unlike other sensor systems described therein the size of the UAS has no impact on the detection range. The limiting factor of a spectrum sensor is the transmit power of the UAS, processing gain of the detection algorithm, and the antenna gain on the sensor.

C. Radiolocation

Radiolocation is the process of determining position of an RF emitter. Throughout aviation history, several approaches to radiolocation have been applied to collision avoidance. One example is the use of a multilateration system to provide aircraft position and identity over the entire Dallas/Ft. Worth airport [3]. A more recent example is a secondary surveillance technique using direction finding in [4]. These are just two examples. More of the history of the use of radiolocation in aviation can be found in [5]. These systems were developed to fill in gaps in surveillance data which were often found through tragic accidents.

Each of these systems, which have been used with larger aircraft, operate on a single wireless transmission standard. These radiolocation systems operate on the basis of having

nearly complete knowledge of the signal. As previously mentioned, there are a variety of wireless communication standards used in UAS. Thus, there is less a priori knowledge of the signal compared to systems used in manned aviation. Signal detection and classification using spectrum sensing algorithms provide the majority of the knowledge for radiolocation of UAS.

Traditional radiolocation systems in aviation have a dedicated frequency band. These allocated frequency bands are free of interference from other non-aviation related spectrum users. Most civil UAS operate on unlicensed frequency bands. This spectrum is shared with other non-aviation related communication. These systems can interfere with traditional radiolocation methods. It is important to be able to separate UAS RF emissions from non-UAS RF emissions.

Traditional aviation radiolocation systems have cooperative signals. The systems have some control over when signals are emitted and which aircraft emits signals. In contrast, UAS signals are not cooperative with radiolocation systems. Radiolocation systems for UAS must be able to handle collision of signals.

D. Spectrum Sensor System Architecture

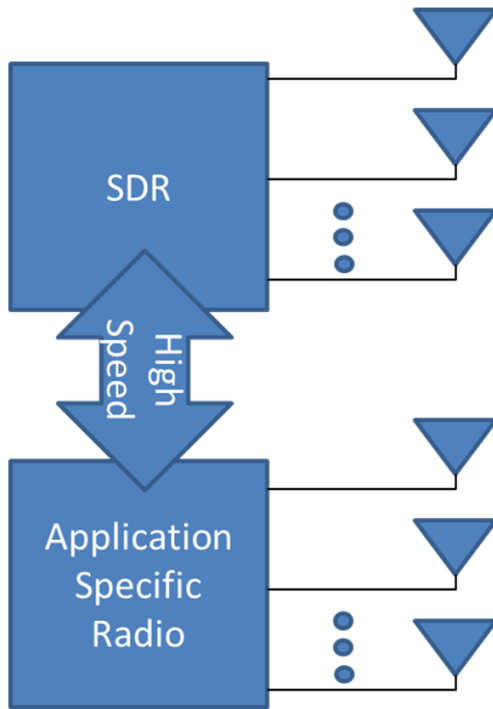


Fig. 2. A high level block diagram of a spectrum sensor.

A sensor node that performs spectrum sensing techniques is called a spectrum sensor. A block diagram of a spectrum sensor is shown in Figure 2 above. A spectrum sensor consists of one or more software defined radios. A software defined radio is a transceiver which signal processing functionalities are performed in a programmable processor. The type of processor can be a digital signal processor, field programmable

gate array (FPGA), and/or a general purpose processor [6]. The programmable nature of these radios allows for the spectrum sensor to adapt to new waveforms and frequency bands used by UAS. Coverage of multiple frequency bands is required in order to detect multiple UAS types.

Additional radio receivers for specific wireless standards can optionally be used by the spectrum sensor as well. There exists several wireless chips that implement many of the protocols used by UAS. Examples include RC, 802.11, etc.

Both the software defined and application specific radios are connected to an antenna system. Depending upon the application, directional or omnidirectional antenna systems can be utilized. The tilt of the directional antennas should be upward to maximize coverage area [8].

V. LIMITATIONS OF SPECTRUM SENSORS

Spectrum sensing has the best performance when there is a high level of knowledge of the signal of opportunity that is emitted by the UAS. When many of the parameters of a signal are unknown, detection and classification of a UAS are more difficult. Under this condition, performance of a spectrum sensor is limited due to the type of detector that can be applied. Thus, detection performance will be degraded in this case.

The only non-cooperative objects in the airspace that a spectrum sensor works with are ones that emit RF signals on a regular basis. Other non-cooperative objects in the sky, such as birds, balloons, and some general aviation aircraft, do not fall into this category. This limits the usefulness of a spectrum sensor for collision avoidance and safe integration of UAS.

Autonomous UAS may not have any wireless communication signals emitting. These types of UAS may be guided by GNSS or vision alone. UAS that are operated in this manner do not require any periodic communications with the ground. With the absence of any RF signals of opportunity, these UAS cannot be detected by a spectrum sensor.

A system of systems approach can aid in these scenarios. In a system of systems approach a spectrum sensor systems can be paired with one or more other types of sensors that can detect objects that do not emit RF signals of opportunity. For example, a radar system could be used to complement a spectrum sensor since it is capable of detecting objects that do not emit RF signals.

VI. EXPERIMENTAL RESULTS

TODO!

VII. CONCLUSION

In this paper we discussed multiple different technologies for UAS detection, their benefits and drawbacks. We propose using spectrum sensing with radiolocation for the safe integration of UAS into the airspace. While there exists some limitations with the use of this technology, spectrum sensing is ideal in most scenarios, as the safe and successful operation of a UAV requires a wireless communication link. There is a tradition of using wireless transmissions for surveillance

of manned aircraft. Much of the same technology used for manned aircraft can be reused for unmanned aviation as well.

The discussion therein has focused on ground-based spectrum sensors. An opportunity exists to explore the possibility of airborne spectrum sensors for UAS DAA applications.

APPENDIX A

PROOF OF THE FIRST ZONKLAR EQUATION

Appendix one text goes here.

APPENDIX B

Appendix two text goes here.

ACKNOWLEDGMENT

The authors would like to thank...

REFERENCES

- [1] H. Kopka and P. W. Daly, *A Guide to L^AT_EX*, 3rd ed. Harlow, England: Addison-Wesley, 1999.

PLACE
PHOTO
HERE

Jonathan M. Peck earned a Bachelor of Science in Computer engineering in 2006 from Clarkson University and Master of Science in Electrical Engineering in 2012 from Syracuse University. He recently obtained a Masters of Business Administration from the State University of New York at Oswego. His past experience is in the design of electronic warfare systems applied to wireless communications with an emphasis on detector design, system modeling, and simulation. His research interest include UAS wireless communications and practical radiolocation

systems. He is licensed remote pilot by the FAA under Part 107 for operation of UAS.

John Doe Biography text here.

Jane Doe Biography text here.