


# Polarization Maintaining Splitters

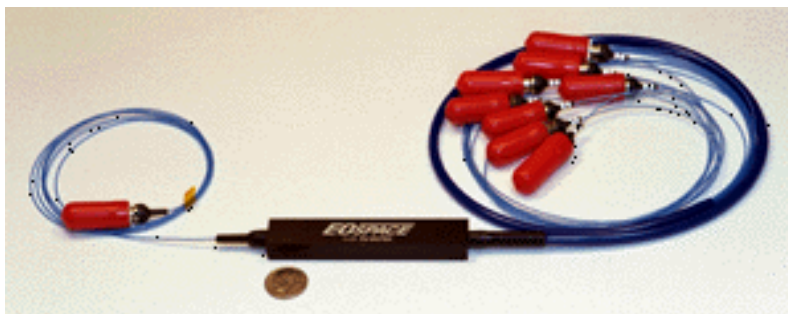

## Key Specifications

Excess Insertion Loss	< 3 dB
Output Uniformity	< 0.5 dB
Output Polarization Extinction Ratio	> 20 dB
Available Splitting Ratios	1x8, 1x16
Operating Wavelength	1.55 micron (C- and L-band)
Input Fiber	PM
Output Fiber	PM
Optical Connectors	FC/PC standard (FC/APC & others available)
Options	Voltage tunability Custom configurations 1.06 & 1.3 micron operating wavelength