

# MikroBus to Olimex Extension v0.1

2025-04-01

Intergalaktik d.o.o.  
License: CERN-OHL-S v2  
Year: 2024.

Change project informations under:  
File>>Schematic Setup>>Text Variables

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
Olimex board is delivering MAX 2.5V on connector.  
You can use 2.5V output signals for 3.3V.  
Be carefull FPGA input only tolerate MAX 2.5V!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!


!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
VCC input is connected over 500mA resetable fuse!  
Maximum current for VCC is set to 500mA.  
It may be possible to drain more current but  
you will need add different FUSE and use it at your own risk!  
3.3V step up is limited to 400mA  
Idea behind limits is that you can use all 3 extensions slots  
at once without any risk od draining to much!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
There is same pinout part for 5V step up.  
So you can have 5V with just one IC change.  
For more details check Power page.  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

Page	Index
.....	.....
CoverPage	1
MainPage	2
PowerPage	3
Board Dimensions	4
.....	.....

A1 Dedicated clock input pins are:  
IO\_SB\_A8: CLK0  
IO\_SB\_A7: CLK1  
IO\_SB\_A6: CLK2  
IO\_SB\_A5: CLK3  
You can use them all as differential inputs.  
We are not able to use any on extension boards.  
It is also possible to use any GPIO as a clock input.  
The only thing to note here is that the signal must be  
routed via the routing structure to the entry point  
of the global clock mesh. These paths are longer than  
via the dedicated clock pins, which is why it is  
essential to pay attention to clock skew.

## TOP VIEW

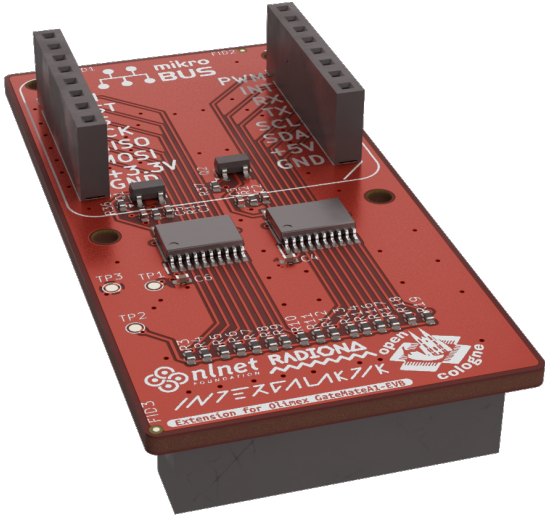

Dimension  
File: dimension.kicad\_sch

Main Sheet  
File: main.kicad\_sch



CERN-OHL-S v2  
Intergalaktik d.o.o.

Sheet: /  
File: MikroBusIO.kicad\_sch

Title: MikroBus to Olimex Extension v0.1

Size: A4

Date: 2024-12-02

Rev: v0.1

KiCad E.D.A. 9.0.0


Id: 1/4

# Main Page


!!  
Olimex board is delivering MAX 2.5V on connector.  
You can use 2.5V output signals for 3.3V.  
Be carefull FPGA input only tolerate MAX 2.5V!  
!!

!!  
Set and Voltage on BANK 1.2V/1.8V/2.5V  
STEP UP can boost any of those voltages  
to 3.3V/5V depending on selected chip  
!!






V\_IN over Resettable Fuses – PPTC 0.50A 6V 0805

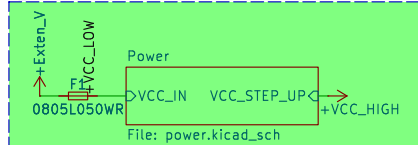


OLIMEX CONNECTOR




POWER FLAGS

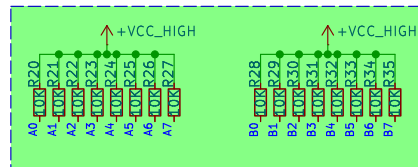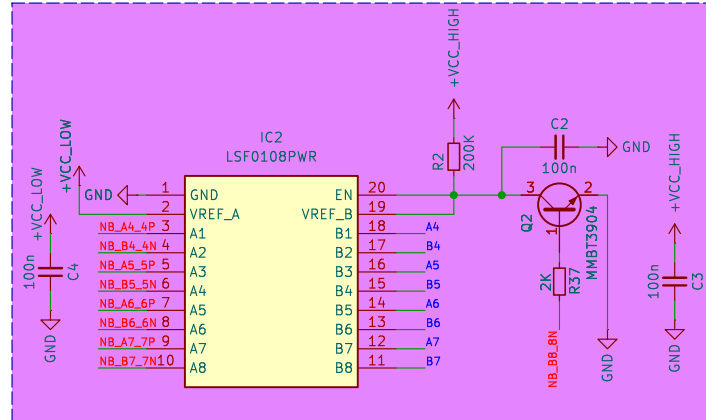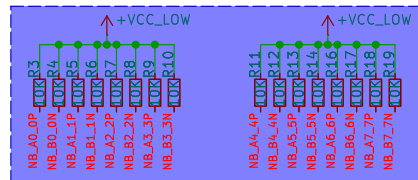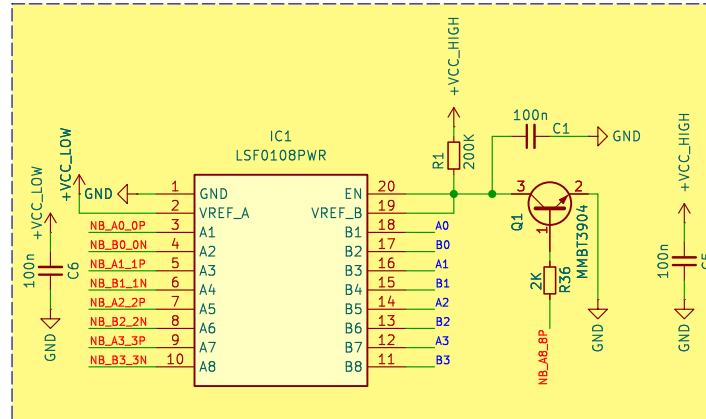


mikroBus

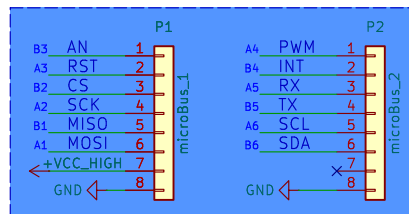

Fiducials



TEST points



CERN-OHL-S v2

Intergalaktik d.o.o.

Sheet: /Main Sheet/

File: main.kicad\_sch

**Title: MikroBus to Olimex Extension v0.1**

Size: A4


Date: 2024-12-02

KiCad E.D.A. 9.0.0

Rev: v0.1


Id: 2/4

# Power Page

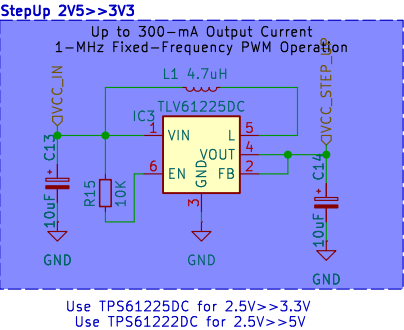

CERN-OHL-S v2		
Intergalaktik d.o.o.		
Sheet: /Main Sheet/Power/		
File: power.kicad_sch		
Title: MikroBus to Olimex Extension v0.1		
Size: A5	Date: 2024-12-02	Rev: v0.1
KiCad E.D.A. 9.0.0		Id: 3/4

# Dimension Page

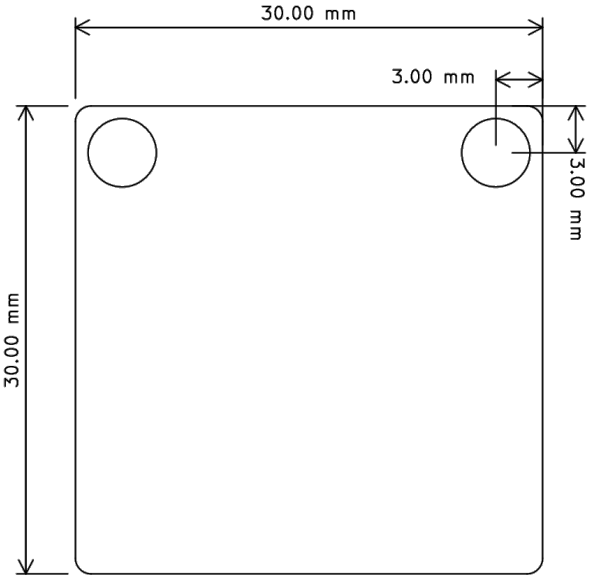

CERN-OHL-S v2

**Intergalaktik d.o.o.**

Sheet: /Dimension/

File: dimension.kicad\_sch

**Title: MikroBus to Olimex Extension v0.1**

Size: A5

Date: 2024-12-02

**Rev: v0.1**

KiCad E.D.A. 9.0.0

Id: 4/4