


nRF9161-DEV-BOARD | nRF9161-LACA-R7 | Hierarchical schematic

[illegible][illegible][illegible]

Circumstance	Justified (%)	Not justified (%)
If someone is attacking you	85	15
If someone is threatening you	75	25
If someone is harassing you	65	35
If someone is insulting you	55	45
If someone is annoying you	15	85

[illegible][illegible][illegible]

Abstract: The purpose of this study was to determine the effect of the use of a 3D printer on the quality of the dental model. The study was conducted in a dental laboratory. The results showed that the use of a 3D printer resulted in a higher quality of the dental model compared to the traditional method. The 3D printer was able to produce a more accurate and detailed model of the dental arch. The study also found that the use of a 3D printer resulted in a faster and more efficient process. The 3D printer was able to produce the model in a shorter amount of time compared to the traditional method. The study concluded that the use of a 3D printer is a viable option for producing dental models.

Figure 1 **Figure 1**

[illegible]





Electrical sources of truth: nRF9161 Product Specification v1.0 Table 55 – Figure 122
nRF91 Hardware Design Guidelines decoupling, nRF9161 DK 1.0.0 RF/GNSS/SIM reference.
Do not populate C18–C21. RF match until antenna/VNA characterization (Nordic OR pin default).

Id: 1/13


A. nRF9161-LACA-R7 (Nordic PS v1.0 Table 55)


SIM_DET (45) MUST FLOAT per PS. RES pins soldered mechanically, electrically NC. GND_Shield tied to VSS pin 103.

nRF9161 PIN POLICY (PS v1.0)
RES pins 10,51,70,71,73,104-127: solder for mechanical rigidity, electrically NC
SIM_DET pin 45: MUST FLOAT - do not wire (PS: Not used)
888 pins only. GND pin 45 must float (PS). DECO=4.7uF.
DECO pin 13: 4.7uF only (PCN134 / nRF91x1)

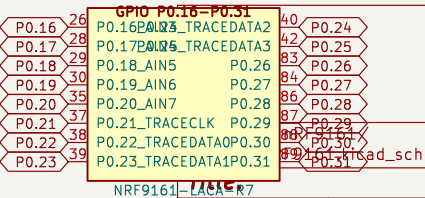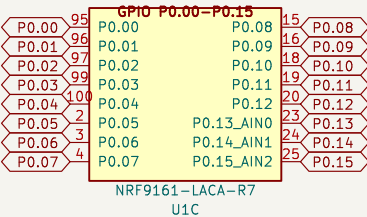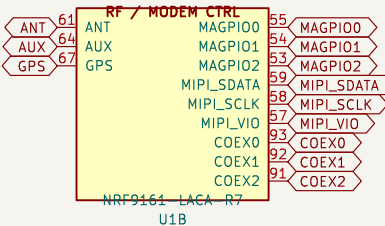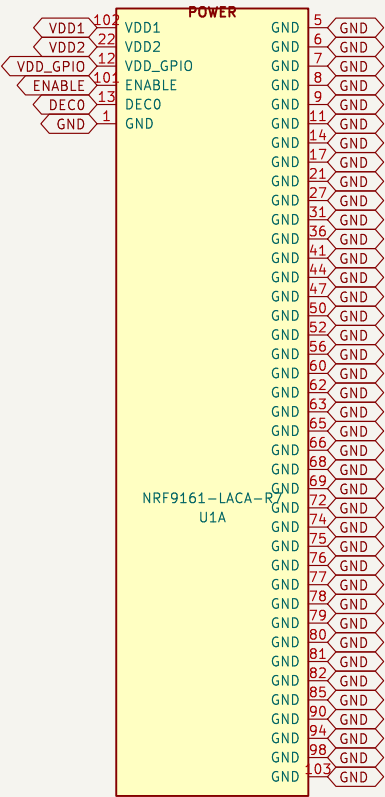

B. POWER (nRF9161 PS 11.3.1 + nRF91 HDG + DK FB3 on VDD2)

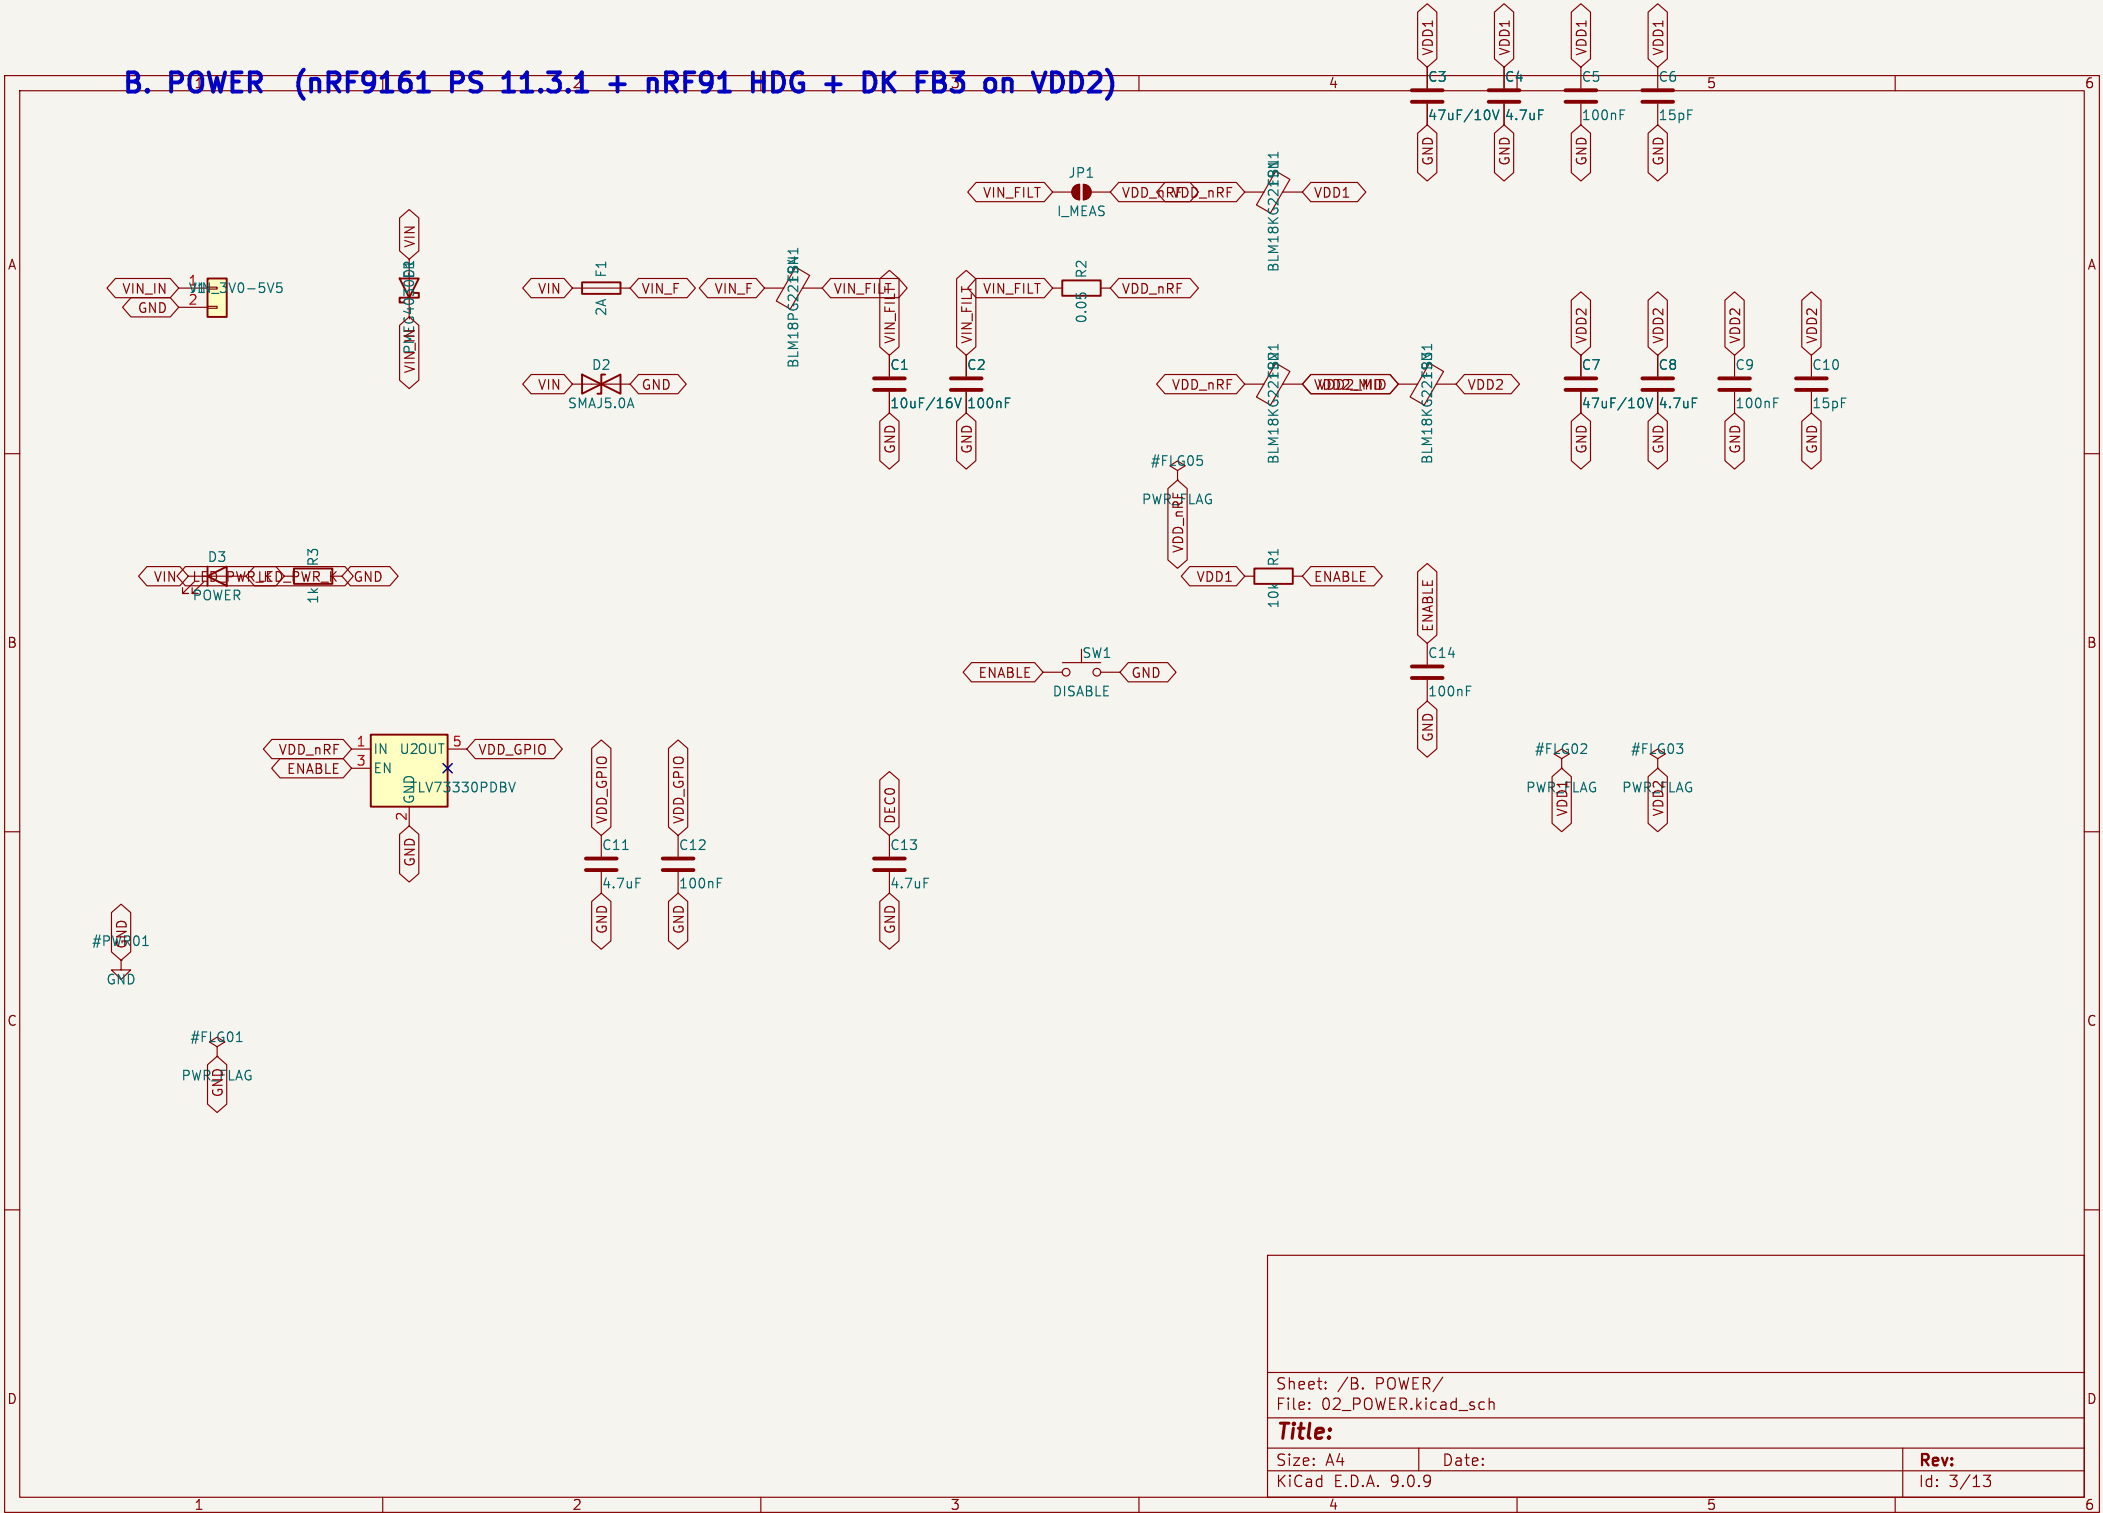


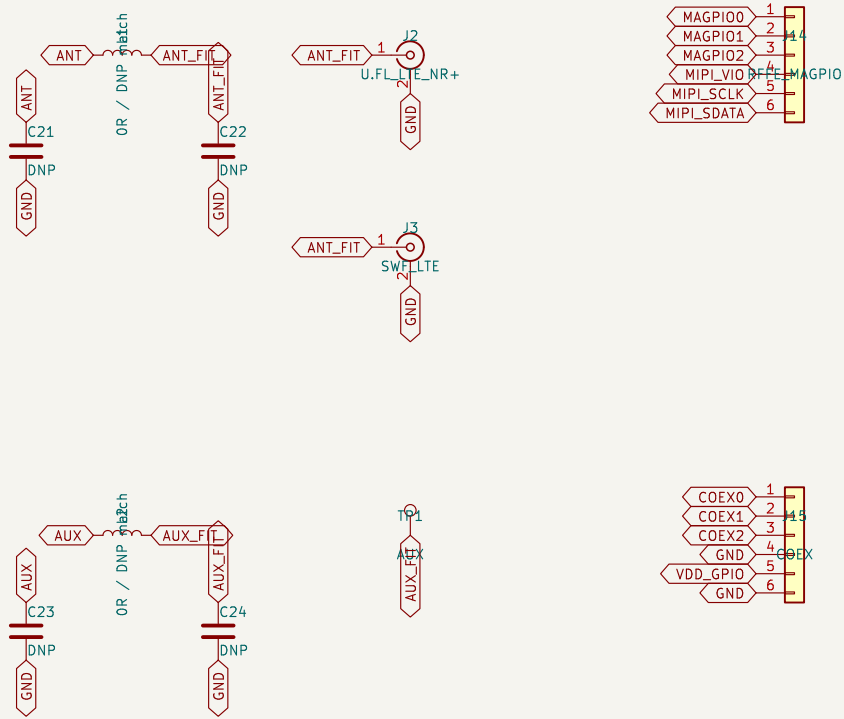

Sheet: /D. GNSS/
File: 04_GNSS.kicad_sch

Title:		Rev:
Size: A4	Date:	
KiCad E.D.A. 9.0.9		Id: 5/13

E. SIM/UICC (TPD3F303 per nRF91 HDG; SIM_DET floats)

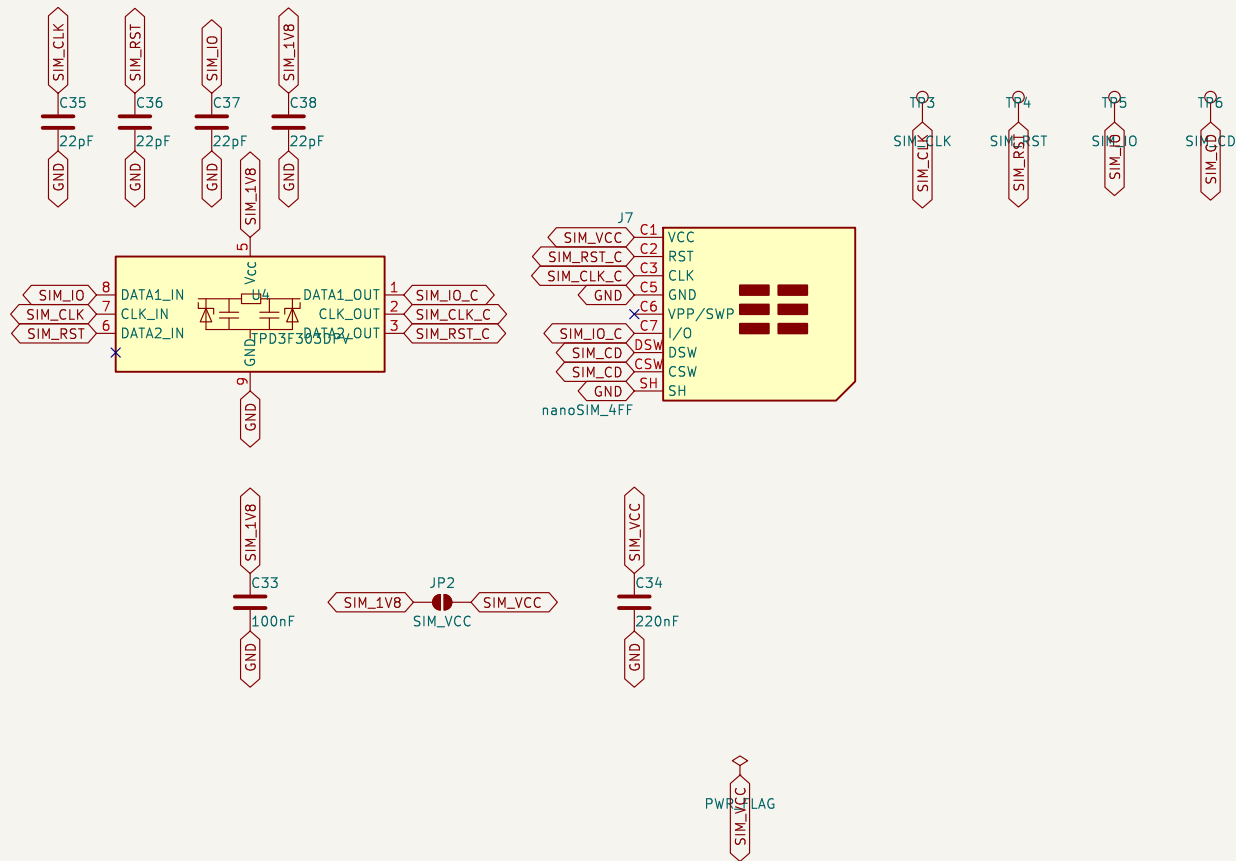

Sheet: /E. SIM/UICC/
File: 05_SIM.kicad_sch

Title:

Size: A4




Date:

Rev:

KiCad E.D.A. 9.0.9

Id: 6/13

F. SWD/DEBUG (10-pin Cortex-M, J-Link compatible)

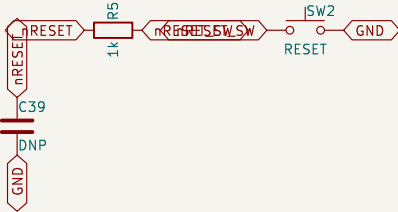

Sheet: /F. SWD/DEBUG/
File: 06_SWD.kicad_sch

Title:


Size: A4

Date:


KiCad E.D.A. 9.0.9

Rev:


Id: 7/13

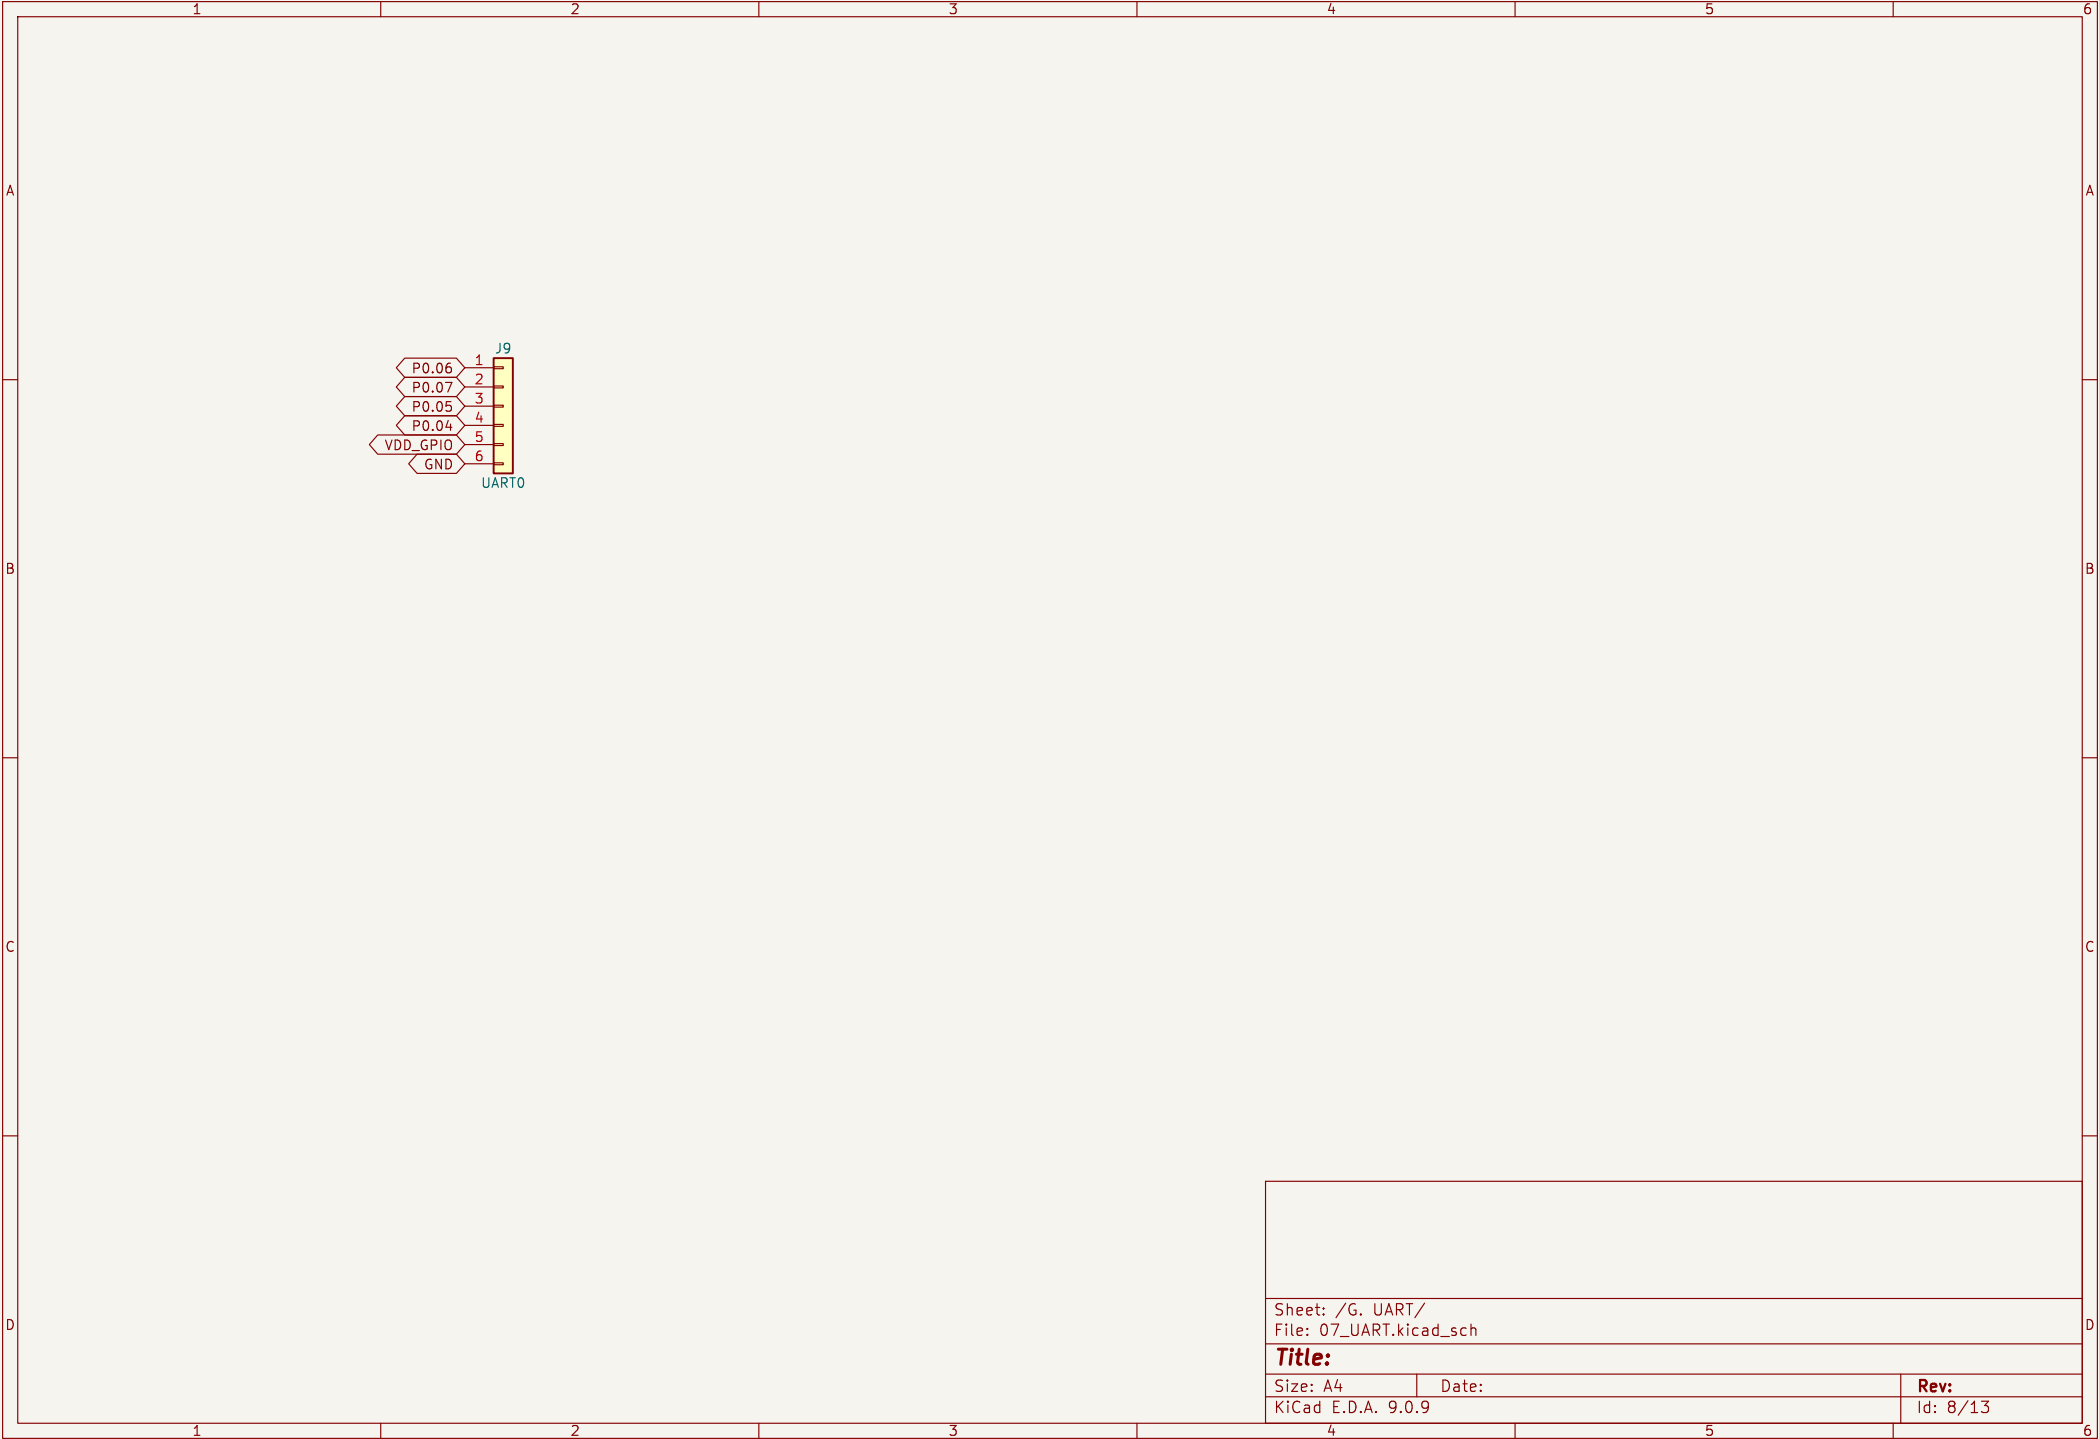


Sheet: /G. UART/ File: 07_UART.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.9		Id: 8/13

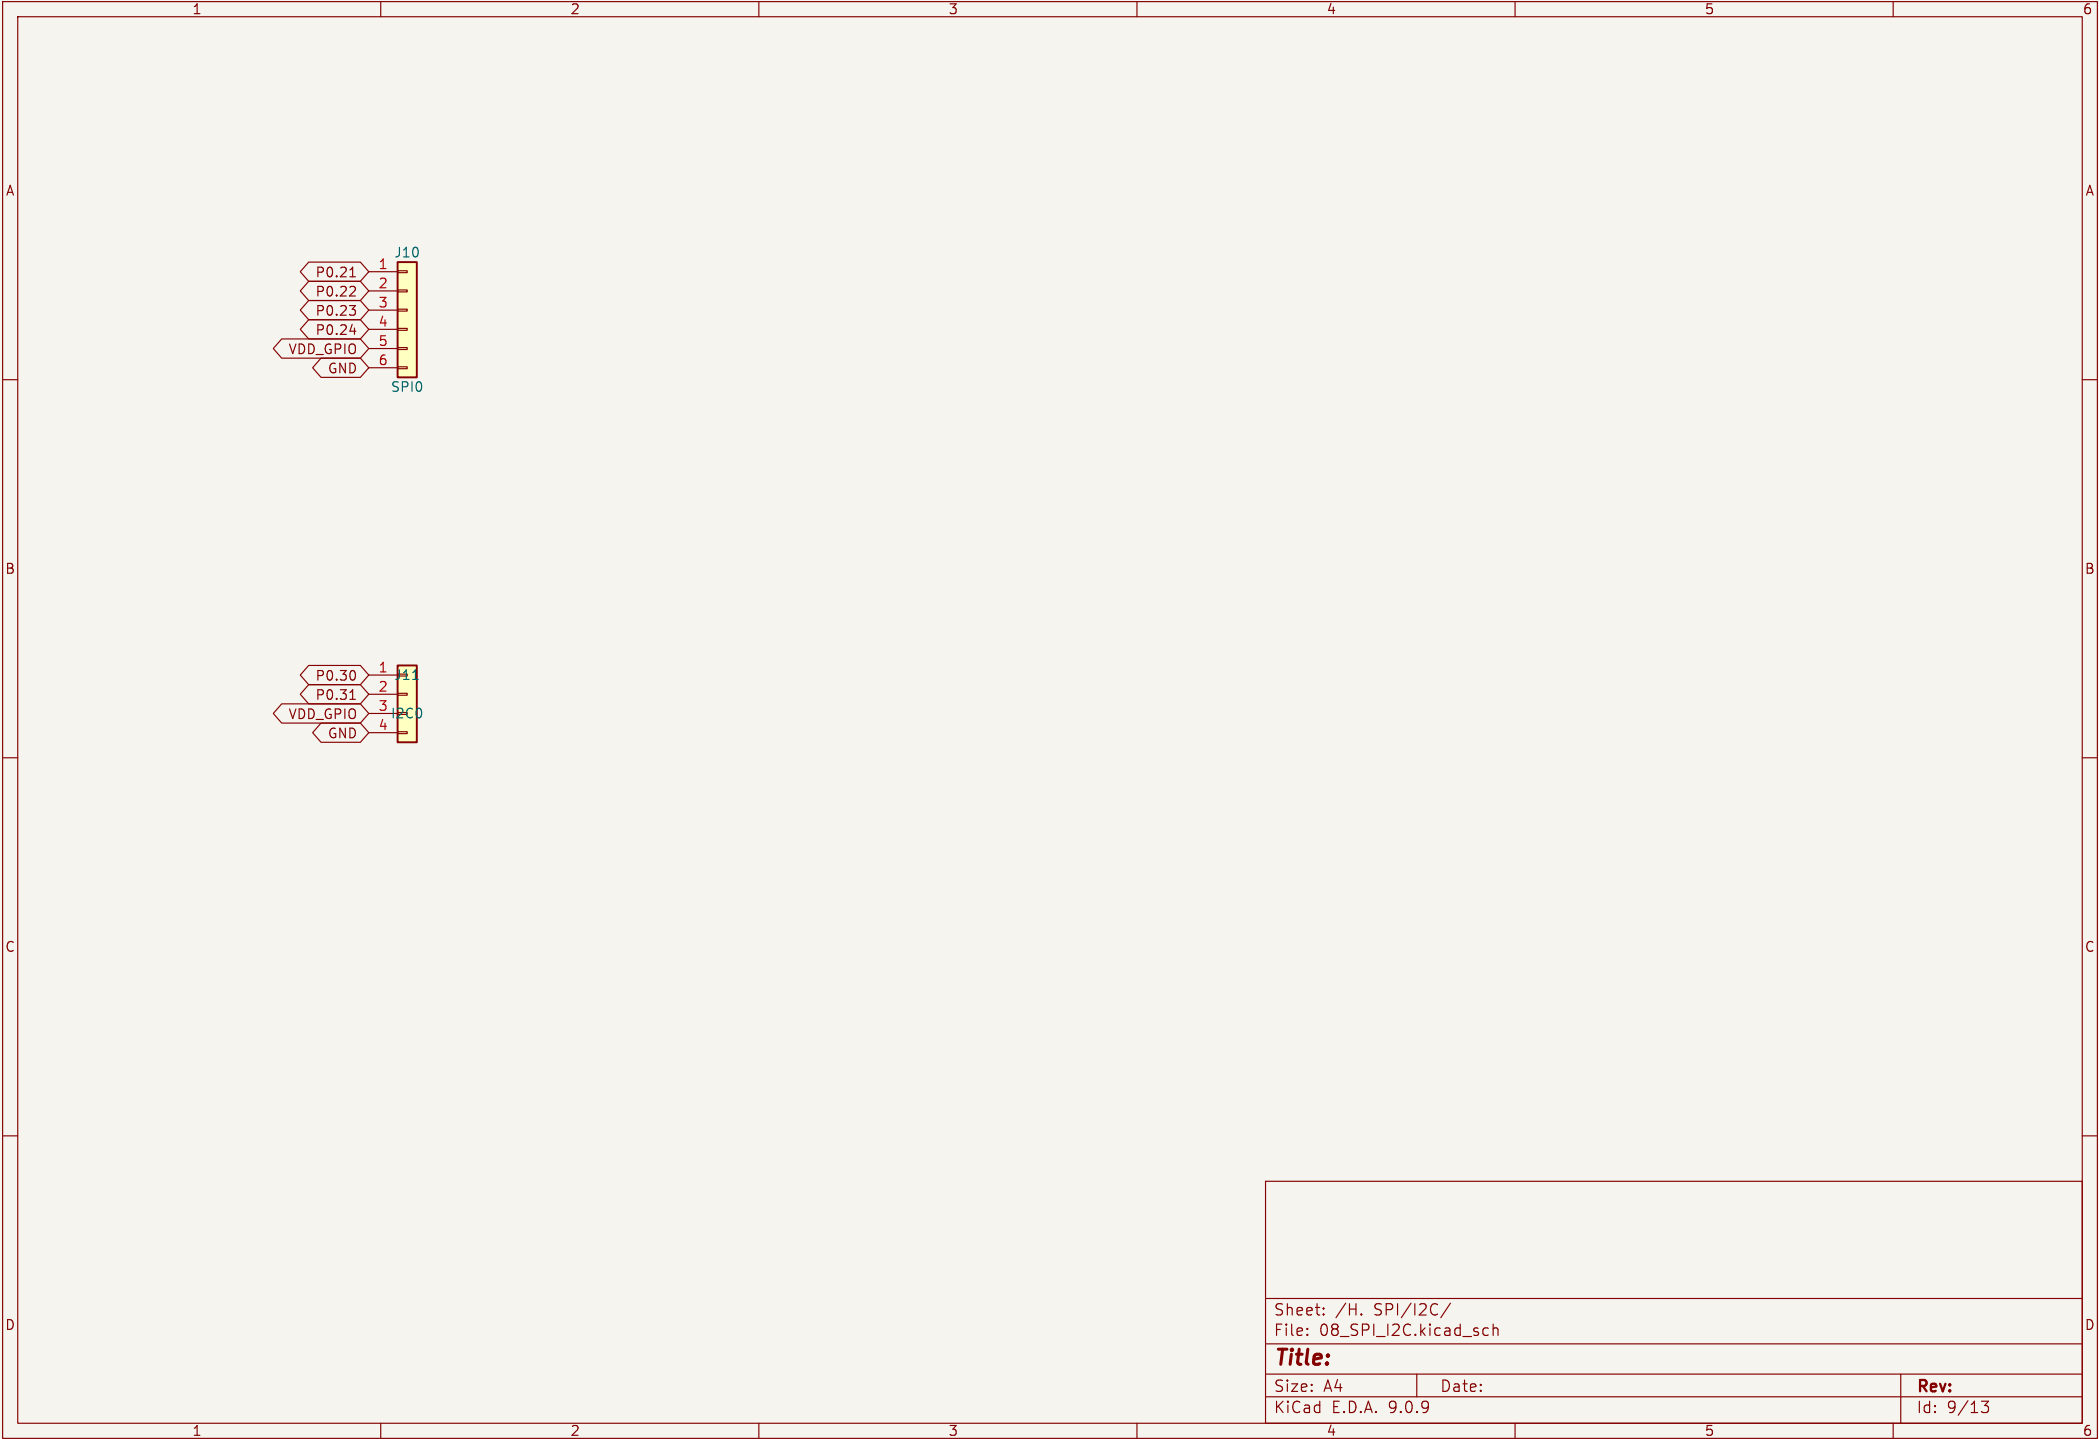

Sheet: /H. SPI/I2C/ File: 08_SPI_I2C.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.9		Id: 9/13

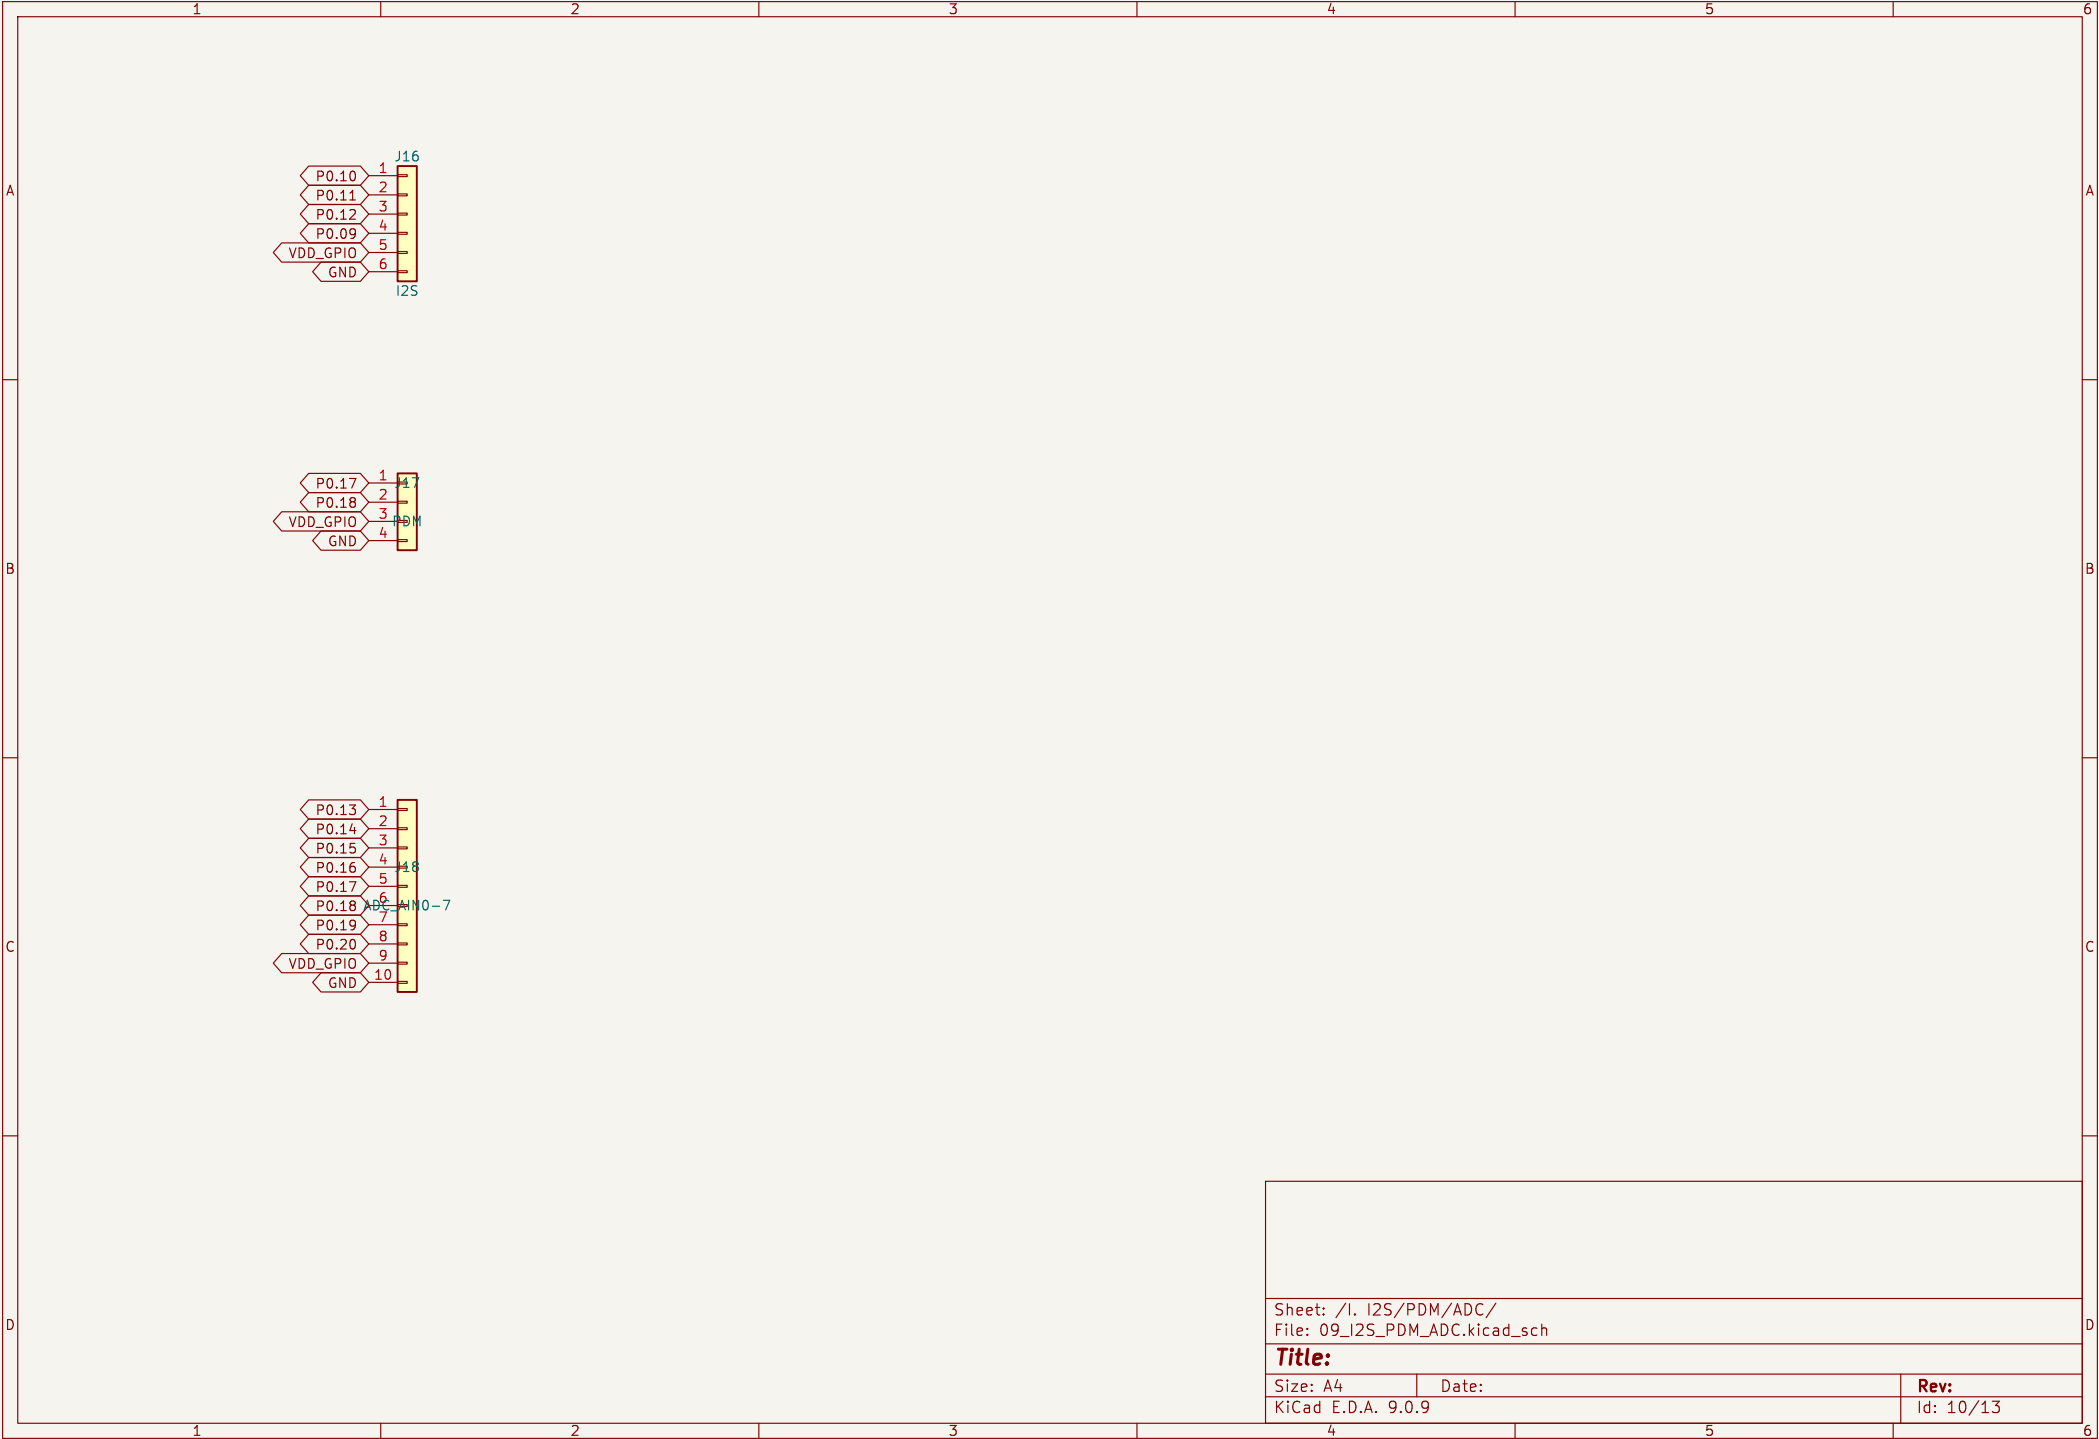

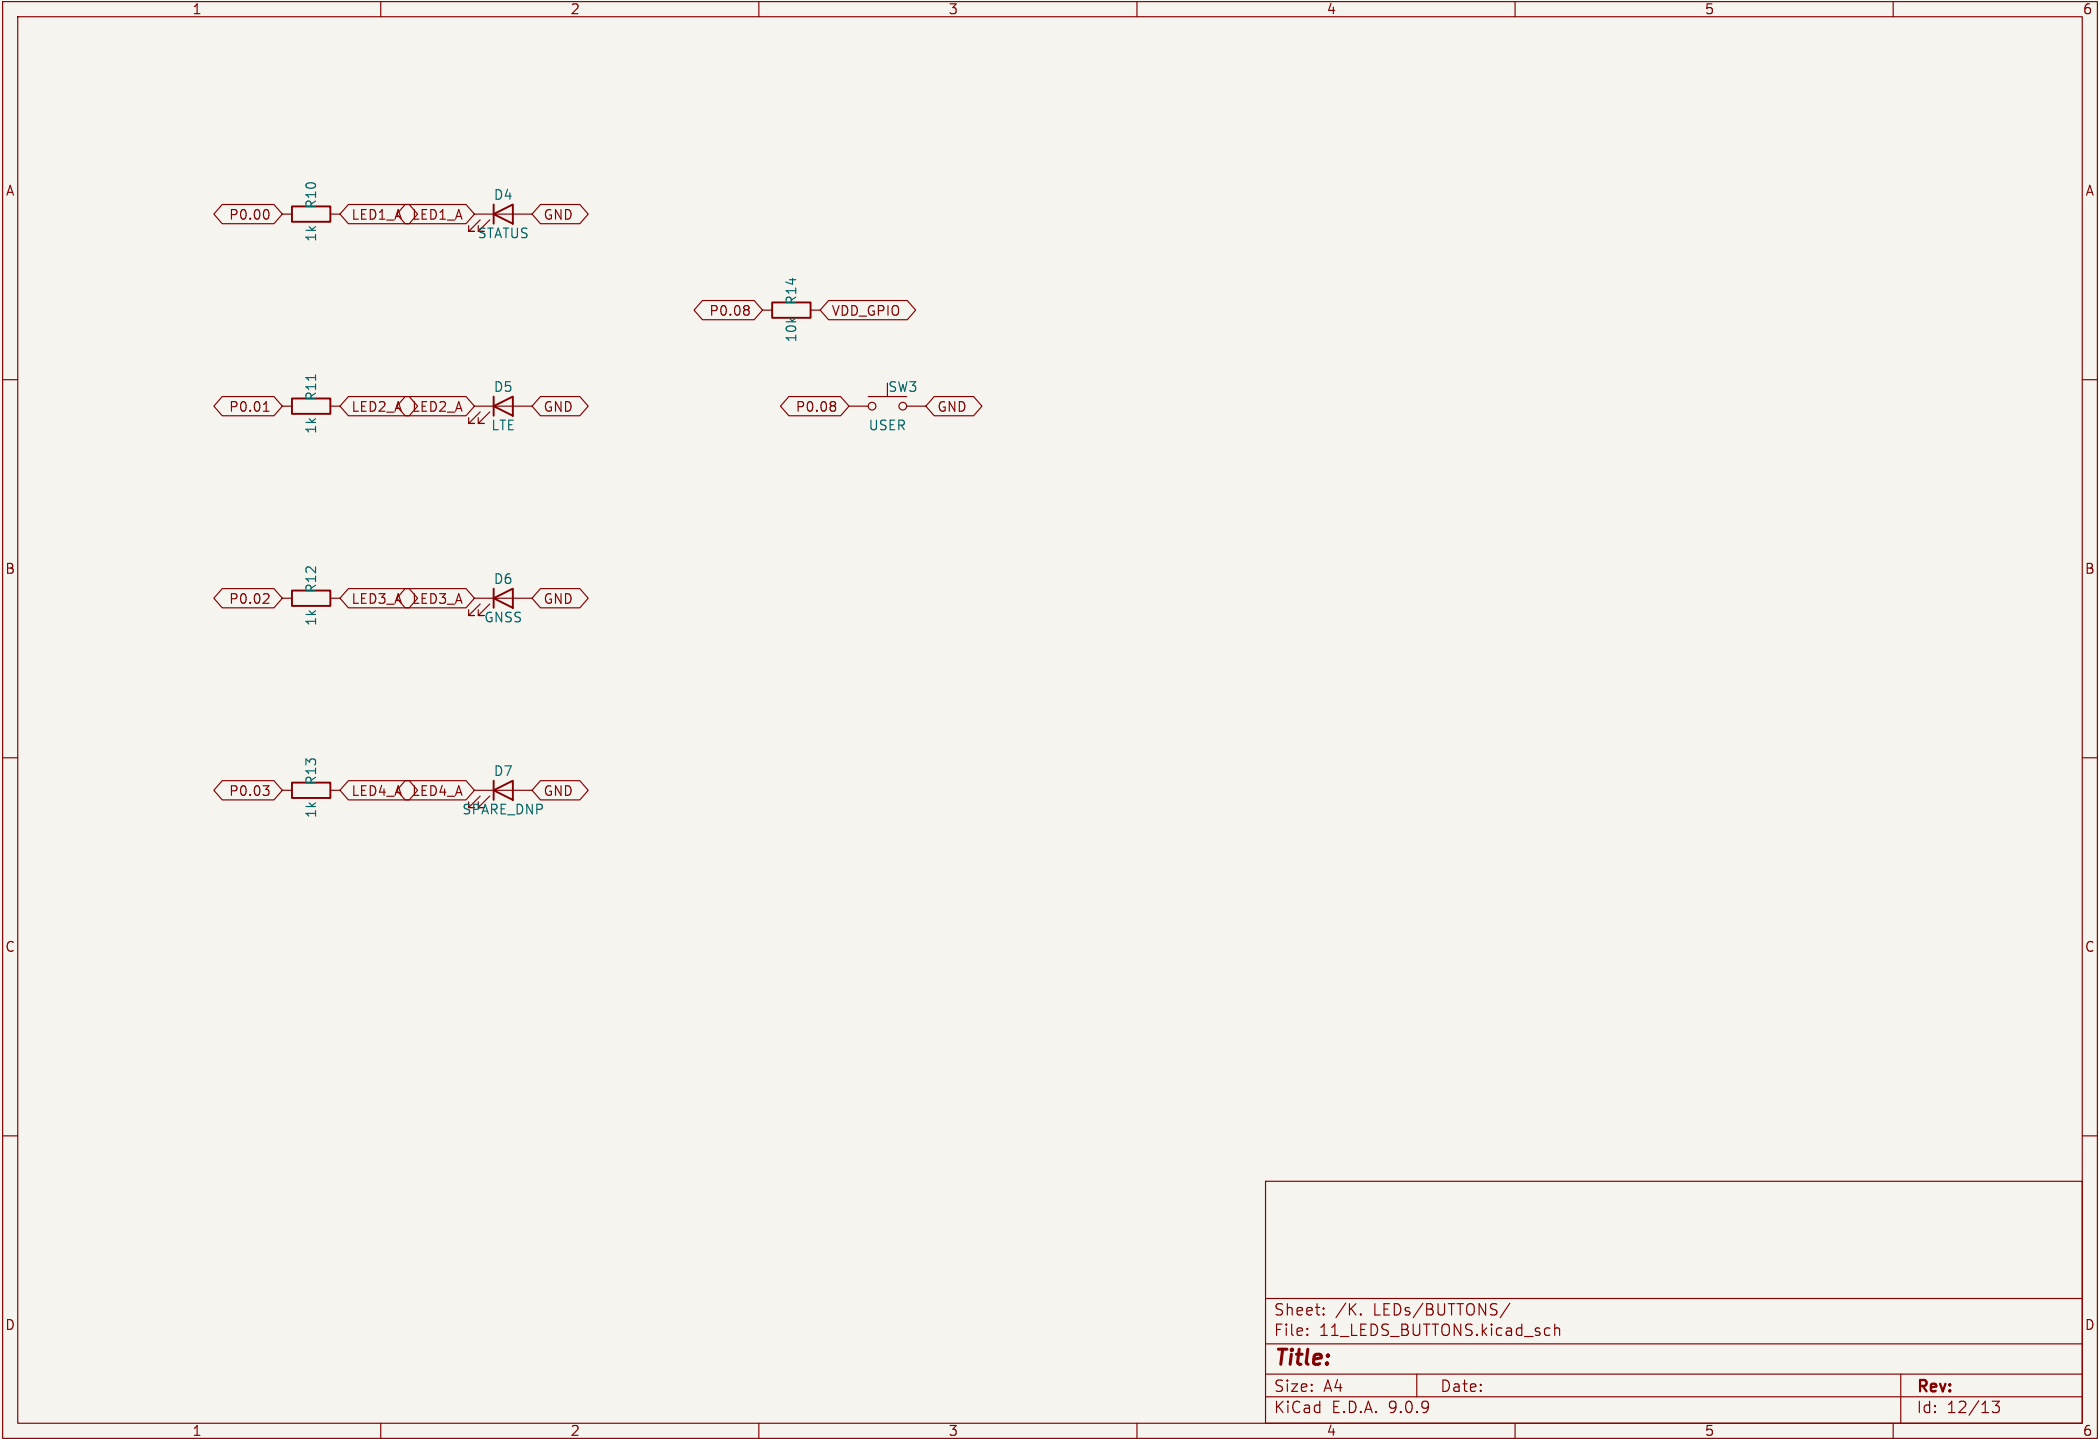


Sheet: /K. LEDs/BUTTONS/
File: 11_LEDS_BUTTONS.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.9

Date:

Rev:
Id: 12/13

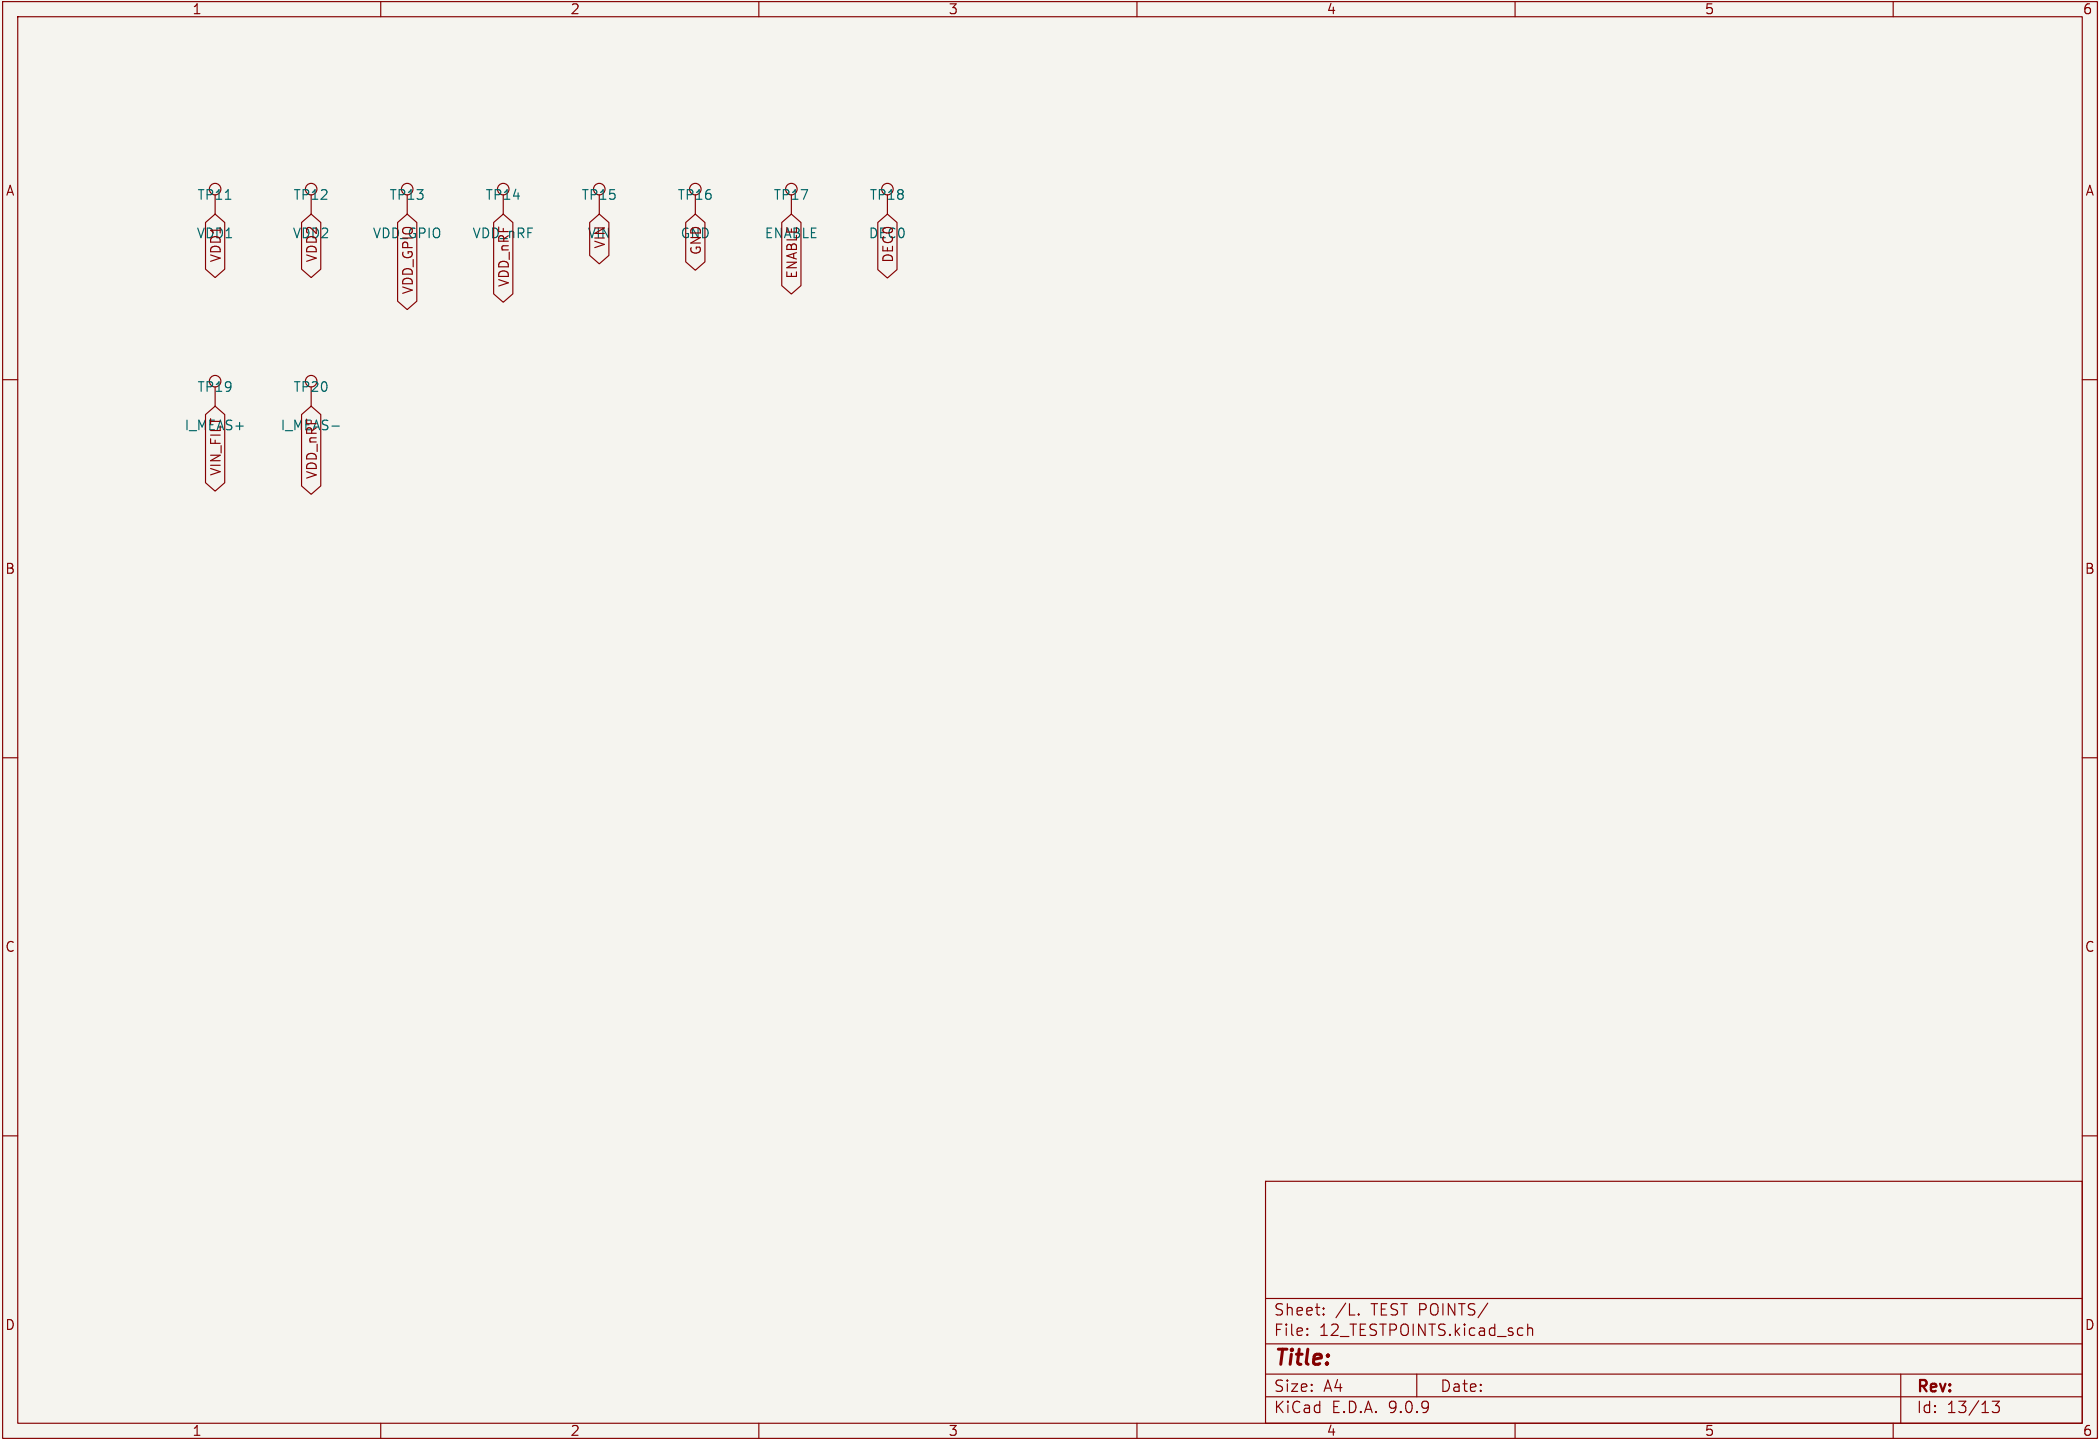

Sheet: /L. TEST POINTS/ File: 12_TESTPOINTS.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.9		Id: 13/13