

# Power, Area and Thermal Prediction in 3D Network-on-Chip using Machine Learning

Abhijith C, Anand M K

Department of Computer Science and Engineering

National Institute of Technology Karnataka (NITK)

Surathkal, India

Email: {abhijithc.242cs003, anandmk.242cs008}@nitk.edu.in

## I. PROPOSED METHODOLOGY

Machine learning (ML) algorithms are widely used in various real-time predictions, such as energy consumption prediction and weather forecasting. The Power, Area, and Temperature (PAT) prediction of Network-on-Chip can also leverage the ability of machine learning models. However, the lack of availability of a proper public dataset is a crucial issue. In addition, most existing studies focus on power, area, or thermal analysis independently. Frameworks involving simultaneous analysis of all three parameters are rare in current research.

This work proposes a hybrid model that combines ML and DL algorithms. The ML component of the hybrid model uses algorithms such as linear regression and decision trees to predict area and power, which have a linear relationship with NoC parameters. The DL component of the model uses convolutional neural networks (CNNs) that learn complex nonlinear relationships in NoC to predict temperature. The algorithms can predict PAT values for unseen input NoC configuration based on their learning. The prediction of both models is combined to produce a single output in the hybrid model.

### A. Linear Regression

Linear regression is an ML algorithm that is used for predictions involving numerics. It learns the relationship between a dependent variable, the output and independent variables, the inputs, by fitting a linear equation. The equation is represented as:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \dots + \beta_n X_n + \epsilon$$

where  $Y$  is the predicted output,  $X_1, X_2, \dots, X_n$  are the input features,  $\beta_0$  is the intercept,  $\beta_1, \beta_2, \dots, \beta_n$  are the coefficients, and  $\epsilon$  is the error term. The coefficients of the equation are learned using Mean Squared Error (MSE), a loss function. In power, area, and thermal (PAT) prediction for networks-on-chip (NoC), linear regression can predict these metrics based on input parameters such as topology size, packet injection rate, and others. However, linear regression can only learn linear relationships between the input and output variables. Therefore, methods such as decision trees

are needed to learn the complex and non-linear relationships that are present in NoC systems.

### B. Decision Trees

Decision trees are powerful ML algorithms used for regression and classification tasks. These algorithms split the training dataset based on the most significant feature that separates the data most precisely. The internal nodes of the decision tree define the decision on an input feature, and the leaf node represents the predicted output value. Decision trees can find complex relationships between input and output variables as they are non-parametric. In power, area, and thermal prediction in NoC systems, these algorithms can learn complex relationships between NoC parameters. Decision trees also provide a visual structure that helps researchers understand which features impact the outputs most. However, these algorithms can result in an overfitted model with increased generalization error. Generalization error can be reduced using techniques like pruning, making these algorithms perform well in large-scale NoC systems.

### C. Convolutional Neural Networks

Convolutional Neural Networks (CNNs) are DL algorithms that are widely used for tasks such as Image processing and Object detection. They extract features from the input dataset by applying filters using convolutional layers, making CNN the best algorithm for learning data structured in grid-like topologies, such as NoC systems. In power, area, and thermal prediction in the NoC system, CNNs can be used to understand non-linear relationships required for temperature prediction. CNNs work well with large datasets and can learn complex patterns in NoC designs that may not be possible for simpler algorithms like linear regression and decision trees.

### D. Dataset Creation

The dataset generation process for power, area, and thermal prediction in NoC systems involves using different parameters specified in Table I to generate different configurations for a NoC system. The different NoC parameters include topology, routing algorithm, network size, traffic pattern, buffer size, packet size, and packet injection rates (PIR) across the X, Y, and Z axes. The dataset is created by changing the value

of the parameters to generate different configurations for an NOC system.

The dataset creation is described in Algorithm 1. Step 1 involves generating different configurations of a NoC system by looping through different parameter values. Step 2 involves using a PAT-noxim simulator to simulate the different configurations generated in Step 1 and collecting output metrics such as total power consumption, total area, and average temperature for each configuration. Steps 3 and 4 involve storing the output metrics along with the configurations of the NoC system into a file such as a CSV file. This file will then be used to train the ML and DL models.

NoC Parameter	Parameter Values
Topology	3D Mesh Topology
Routing Algorithm	XYZ Routing
Network Size	2x2x2, 3x3x3, 4x4x4, 5x5x5, 6x6x6, 7x7x7, 8x8x8, 9x9x9, 10x10x10, 12x12x12
Traffic Pattern	Random
Buffer Size	8
Packet Size	16 flits
Packet Injection Rate (PIR)	X-axis PIR: [0.01, 0.05, 0.1, 0.15, 0.2] Y-axis PIR: [0.01, 0.05, 0.1, 0.15, 0.2] Z-axis PIR: [0.0001, 0.001, 0.005, 0.01]
Sample Period	20000000

TABLE I: NoC Parameters and Values

### E. Design of Proposed Method

Algorithm 2 describes the flow of the proposed method. Step 1 involves dataset generation using the PAT-noxim simulator, as described in Algorithm 1. The dataset is normalized to ensure that all the parameters equally contribute to the ML prediction. The duplicate data is removed to ensure the proposed model is trained on different data. The dataset is split into training (70%), testing (15%), and validation (15%).

---

### Algorithm 1 Generate Data Points for NoC Dataset

---

```

1: Input: Set of NoC parameters:
   • Topologies: {2x2x2, 3x3x3, 4x4x4, 5x5x5, 6x6x6, 7x7x7, 8x8x8, 9x9x9, 10x10x10, 12x12x12}
   • Traffic Patterns: {Random}
   • Buffer Size: 8 flits
   • Packet Size: 16 flits
   • PIR Values:
     – X-axis PIR: {0.01, 0.05, 0.1, 0.15, 0.2}
     – Y-axis PIR: {0.01, 0.05, 0.1, 0.15, 0.2}
     – Z-axis PIR: {0.0001, 0.001, 0.005, 0.01}
   • Sample Period: 20,000,000 cycles
2: Step 1: Generate Configurations
3: for each topology in Topologies do
4:   for each traffic pattern in Traffic Patterns do
5:     for each PIR_x in X-axis PIR do
6:       for each PIR_y in Y-axis PIR do
7:         for each PIR_z in Z-axis PIR do
8:           Create a configuration with the parameters: {topology, traffic pattern, PIR_x, PIR_y, PIR_z, buffer size, packet size, sample period}
9:         end for
10:       end for
11:     end for
12:   end for
13: end for
14: Step 2: Simulate and Gather Metrics
15: for each configuration generated do
16:   Run the simulation to gather metrics: {total power, total area, average temperature}
17: end for
18: Step 3: Store Results
19: for each configuration do
20:   Store the configuration parameters and the gathered metrics
21: end for
22: Step 4: Save Dataset
23: Save the dataset with the 1000 configurations and metrics to a file (e.g., CSV)

```

---

---

**Algorithm 2** Algorithm for Proposed Framework

---

- 1: **Input:** Set of NoC parameters: Topology, Traffic Pattern, PIR (X, Y, Z), Buffer Size, Packet Size, Sample Period
  - 2: **Output:** Predicted values of Power, Area, and Temperature
  - 3: **Step 1: Dataset Creation**
  - 4: Create dataset using simulation tool (PAT Noxim) based on input NoC parameters
  - 5: Extract Power, Area, and Temperature as output labels
  - 6: **Step 2: Data Preprocessing**
  - 7: Normalize or scale the dataset
  - 8: **Step 3: Train-Test Split**
  - 9: Split the dataset into Training, Validation, and Test sets (e.g., 70% training, 15% validation, 15% testing)
  - 10: **Step 4: Model Training**
  - 11: **ML Component:**
  - 12: Train a **Linear Regression** model for Power and Area prediction
  - 13: Train a **Decision Tree** model for Power and Area prediction
  - 14: **DL Component:**
  - 15: Train a **CNN** for Temperature prediction
  - 16: **Step 5: Model Evaluation**
  - 17: Use validation data to evaluate both models
  - 18: **Step 6: Combine Predictions**
  - 19: Combine the outputs from the ML and DL models for final Power, Area, and Temperature predictions
  - 20: **Step 7: Testing and Final Prediction**
  - 21: Test the combined model on the test set and make the final prediction
  - 22: **End**
- 

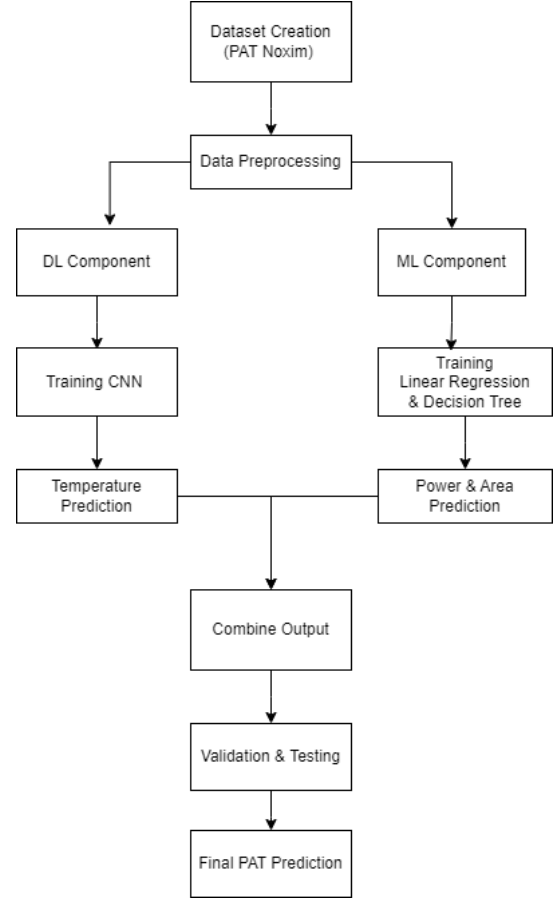


Fig. 1: Illustration of the Proposed Framework