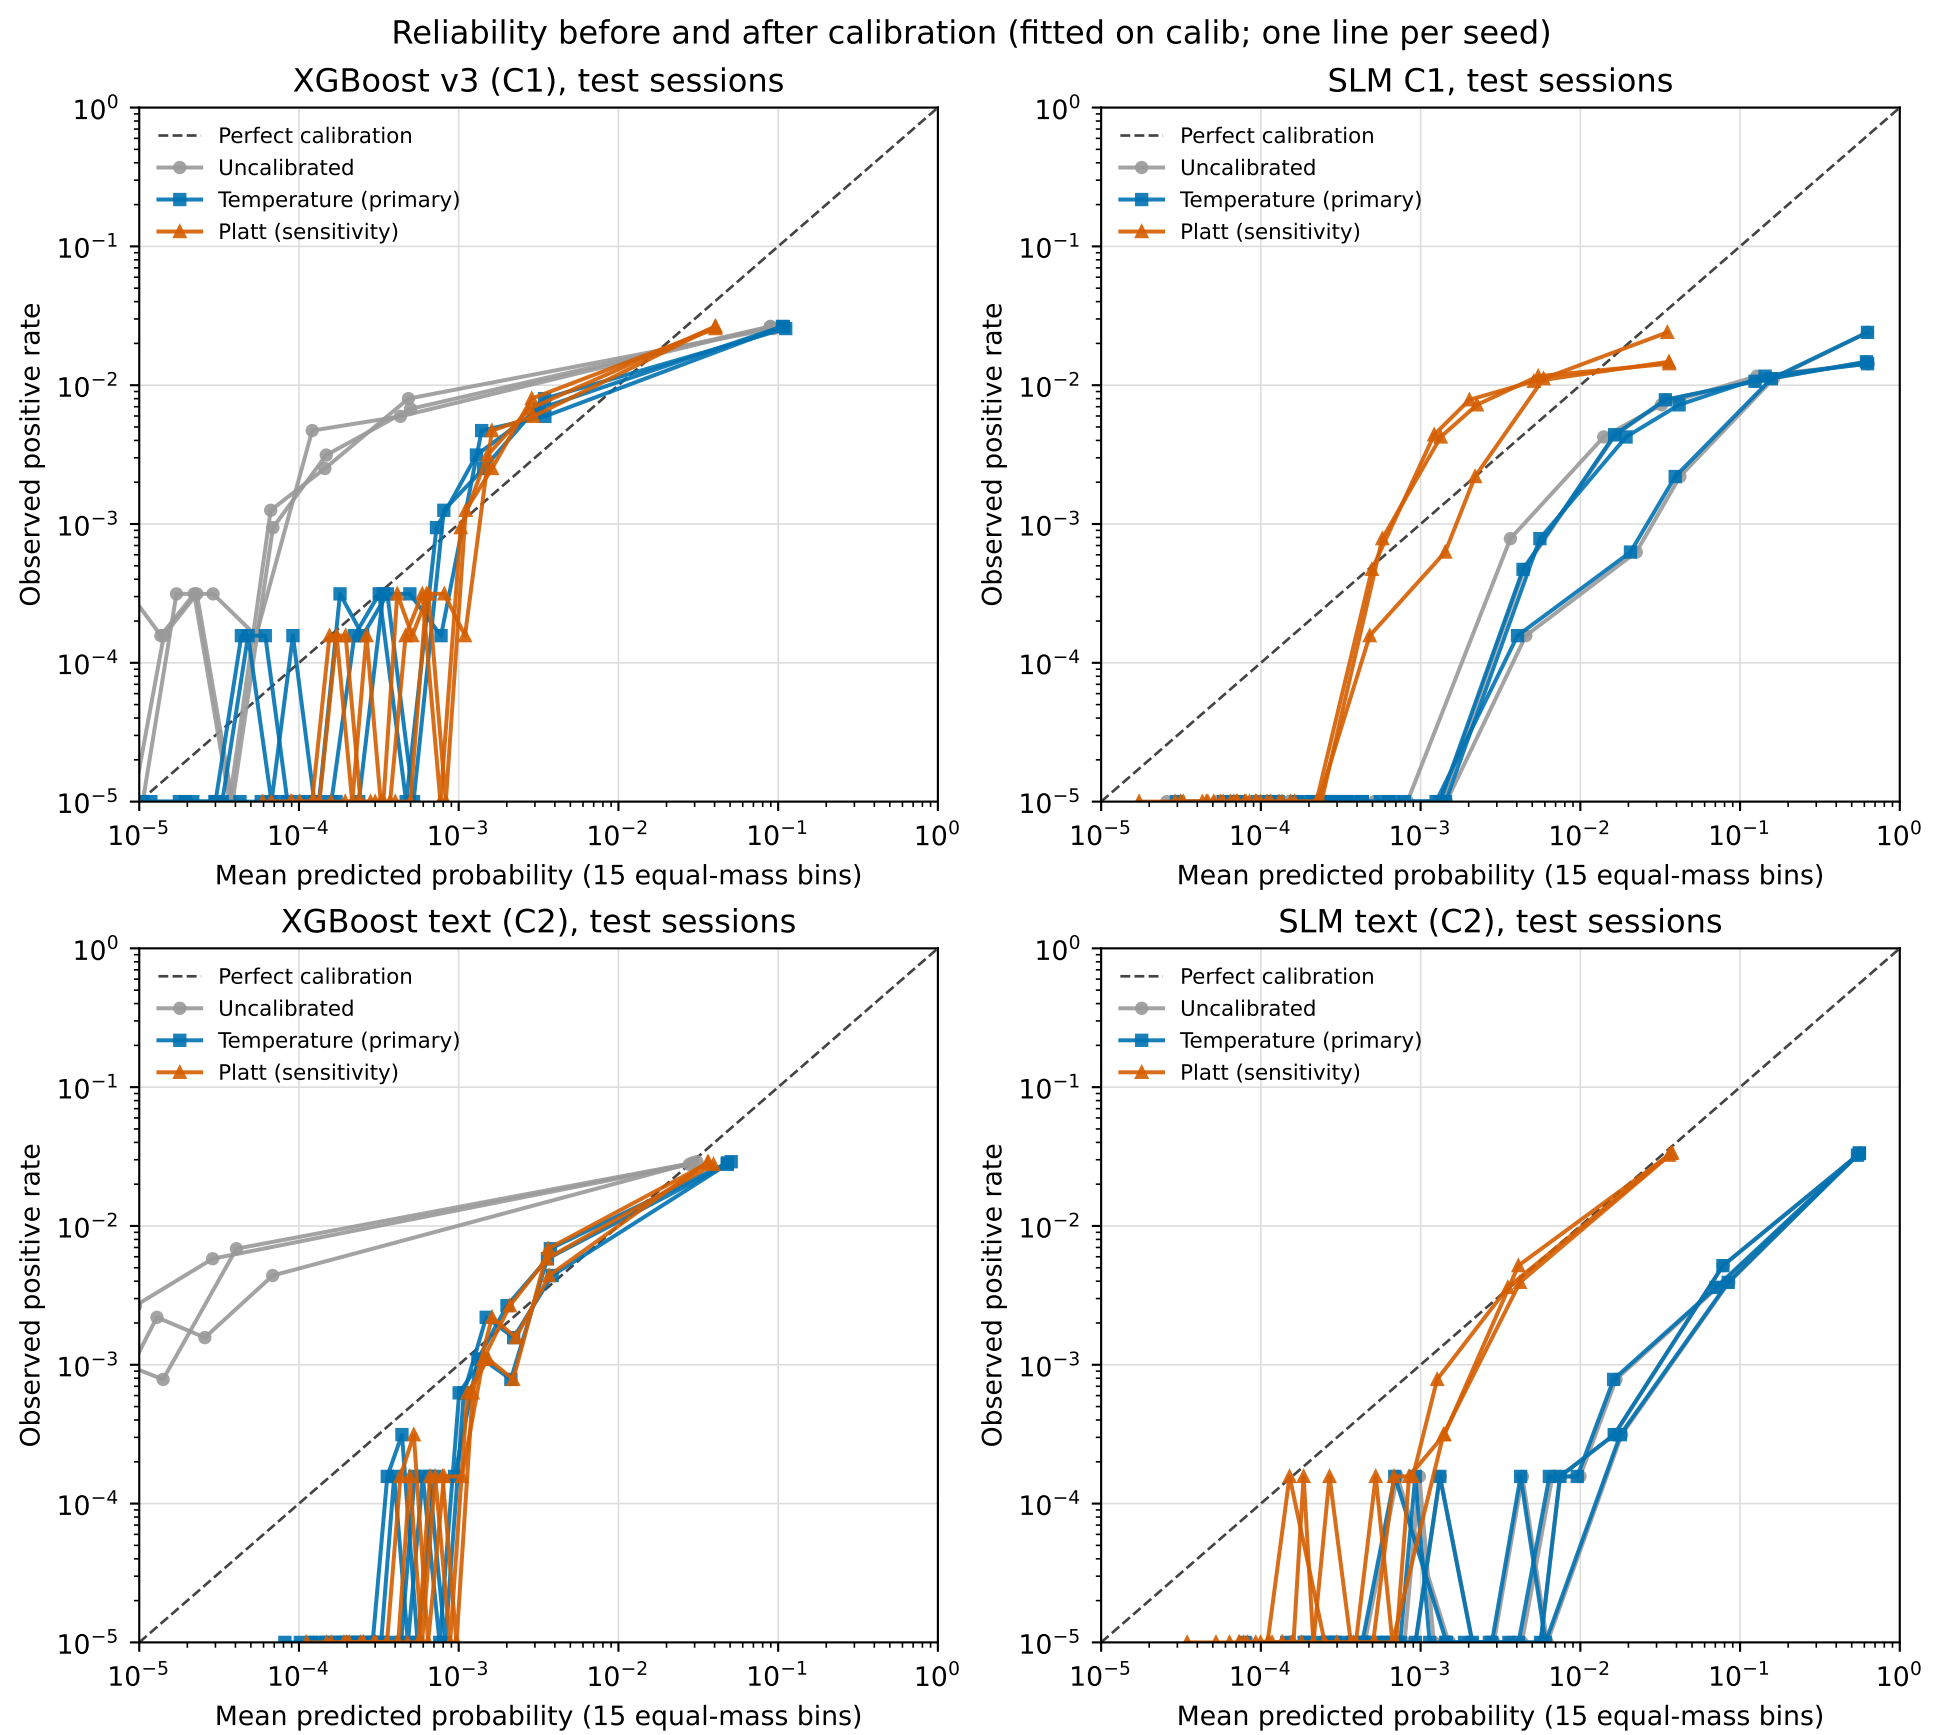

Reliability diagrams on log-log axes (15 equal-mass bins; one line per seed); bins with no observed positives are drawn at the 1e-5 floor of the y axis.