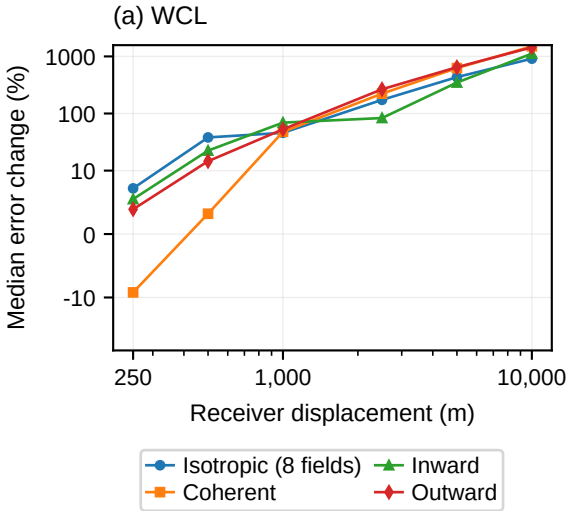
(a) WCL
Median error change (%)
1000
100
10
0
-10
250
1,000
10,000
Receiver displacement (m)
Isotropic (8 fields)
Inward
Coherent
Outward

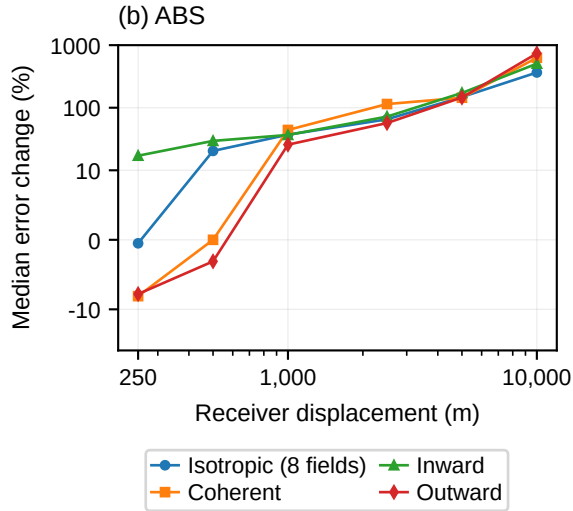
(b) ABS
Median error change (%)
1000
100
10
0
-10
250
1,000
10,000
Receiver displacement (m)
Isotropic (8 fields)
Inward
Coherent
Outward

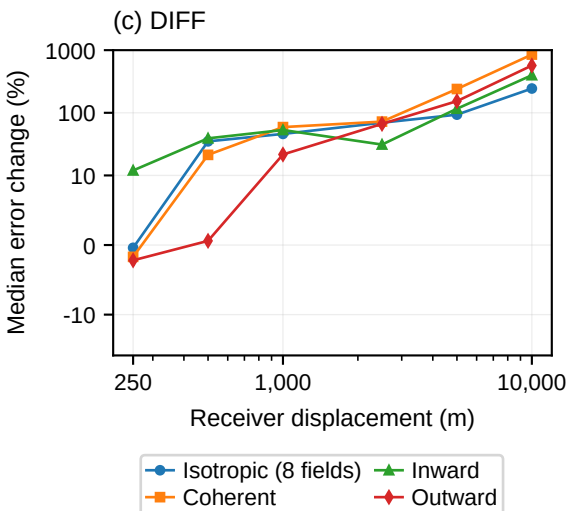
(c) DIFF
Median error change (%)
1000
100
10
0
-10
250
1,000
10,000
Receiver displacement (m)
Isotropic (8 fields)
Inward
Coherent
Outward

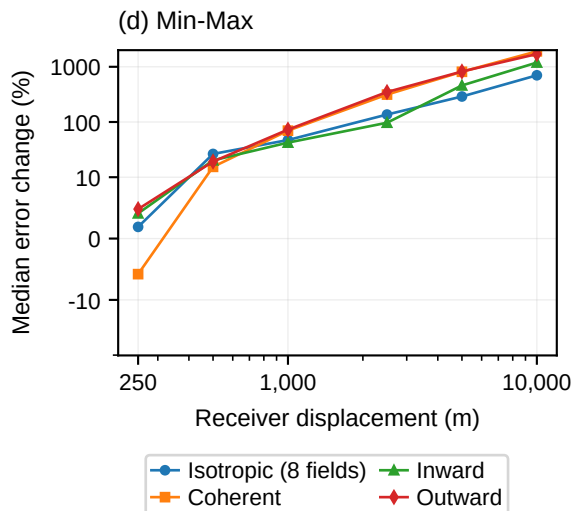
(d) Min-Max
Median error change (%)
1000
100
10
0
-10
250
1,000
10,000
Receiver displacement (m)
Isotropic (8 fields)
Inward
Coherent
Outward