




DIGITAL PANEL METER



COMPACT

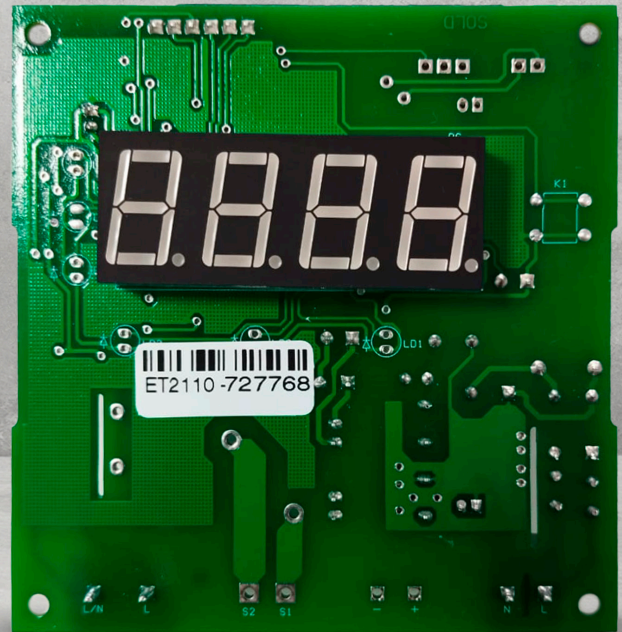

ELEGANT



ACCURATE



EASY TO USE

FEATURES

- Compact in size.
- True RMS Measurement.
- Wide Auxiliary Supply Range: 85 - 270 V AC or DC.
- Available in Accuracy Class 1.0
- Single row display displays L-L and L-N voltages.

TECHNICAL PARTICULARS

- Model Number
- Voltage measurement range
- Aux Supply
- Accuracy
- Display
- Isolation
- Temperature range
- Burden
- Operating frequency
- With Conformal Coating

OFFERED SPECIFICATION

ET 2110
50 -500 V AC
85 – 270 V AC / DC
± 1%
4 Digit, 12.5 mm, 7 segment, High red
2000 V AC for one minute
-10 to 60 degree C, RH < 95%
2 VA typical on Aux. Supply
50 – 400 Hz


MECHANICAL DETAILS

- Product dimension = 85 x 85 x 29.1 mm
- Package Top = 10 mm
- Package Bottom = 17.5 mm
- PCB Thickness = 1.6 mm
- Total Height = 29.1 mm



**NOTE : Dimensions mentioned are in mm (Tolerance ± 5mm)

BOARD DIMENSIONS AND MOUNTING HOLE DETAILS

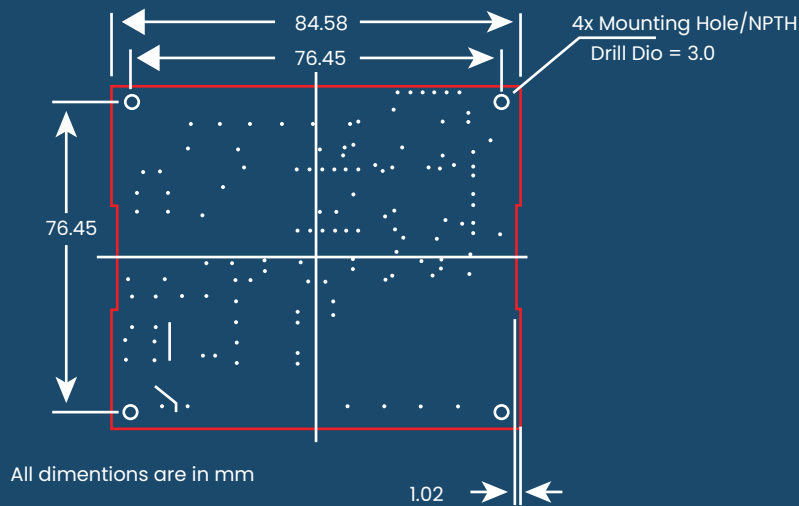

118,000+
Telecom Towers



700+
Solar Sites



15+ Global
MNO/Tower CO



26+
Countries



500,000+
Connected Assets



20,000+
Enterprise Users

DIN EN ISO 9001:2015

Get in touch :



sales@invendis.com



www.invendis.com



No. 230, 1st Cross, 38th Main, BOOHBCS Layout,
BTM 2nd Stage, Bangalore – 560 068

Invendis
Invent, Discover.



**SCAN FOR
MORE DETAILS**