

RDB40

DATA SHEET

PRODUCT INFO

PROCESSOR

MediaTek MT7628, 128 MB DDR RAM, 32 MB Flash

Wi-Fi

2.4 Ghz Wi-Fi, AP/Station

BLE

nRF54L05 BLE 6.0 SOC with LR Radio and 128 MHz Arm® Cortex®-M33 processor, 500KB NVM and 96KB RAM

INTERFACE

1x LAN 10/100, 1x WAN 10/100

POWER

12V DC IN/ Active PoE IN (802.3 af)

OPERATING SYSTEM

Open-WRT Linux



Hardware Specification

CPU	MediaTek MT7628
RAM	128 MB
FLASH	32 MB
WAN	1x 10/100 (Active POE)
LAN	1x 10/100
Wi-Fi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Wi-Fi: 2x Internal Antenna BLE: 1x Internal Antenna
Status LED	2x Power, 1x Wi-Fi 2.4G, 1x PRG/BLE, 2x Ethernet
Power Connector	DC Jack /PoE
Input Voltage Range	12 Vdc (DC Jack) 44-57 Vdc (Active PoE IN (802.3 af))
Power Adapter	YES
Enclosure Material	ABS Plastic
Colour	White
Mounting	Ceiling Mount
Design	Fanless
Dimensions	190mmx190mmx40mm (W x D x H)
Weight	290 gm
Working Environment	Indoor

BLUETOOTH SPECIFICATIONS

BLE Chipset	nRF54L05 BLE 6.0 SOC with LR Radio and 128 MHz Arm® Cortex®-M33 processor, 500KB NVM and 96KB RAM
RF Front End (FEM)	Integrated FEM with +20dB PA and 13 dB LNA Gain (nRF21540 -Range Extender)
Operating Frequency	2400 MHz to 2500 MHz
Channel spacing	1MHz
On the Air Data Rate	125kbps-4000kbps
Transmit power	7dBm at BLE SOC , Additional 5dBm to 22dBm Gain setting in PA of the FEM
Receive Sensitivity	-104 dBm @125 kbps Bluetooth LE mode for BLE SOC, Additional 13dBm gain in LNA of FEM -96 dBm @1Mbps with 0.1% BER for BLE SOC, Additional 13dBm gain in LNA of FEM

Wi-Fi

Technology	802.11 b/g/n
Channel Selector	Auto/Configurable
Channel Width	20 MHz, 20/40 MHz
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
TX Power	Configurable
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Scheduler	Scheduled ON/OFF
MAC ID Filtering	Whitelisting, Blacklisting
Other	WMM (Enabled/Disabled)


Operational & Environmental


Storage Temperature	-30 ~ 70 °C
Operating Temperature	0~ 50 °C
Humidity	10 ~ 90% (non-condensing)

Standard Packaging

RDB40 Router with Plastic housing, *Power Adapter, 01-meter Ethernet cable.

SPATIAL MEASUREMENT:

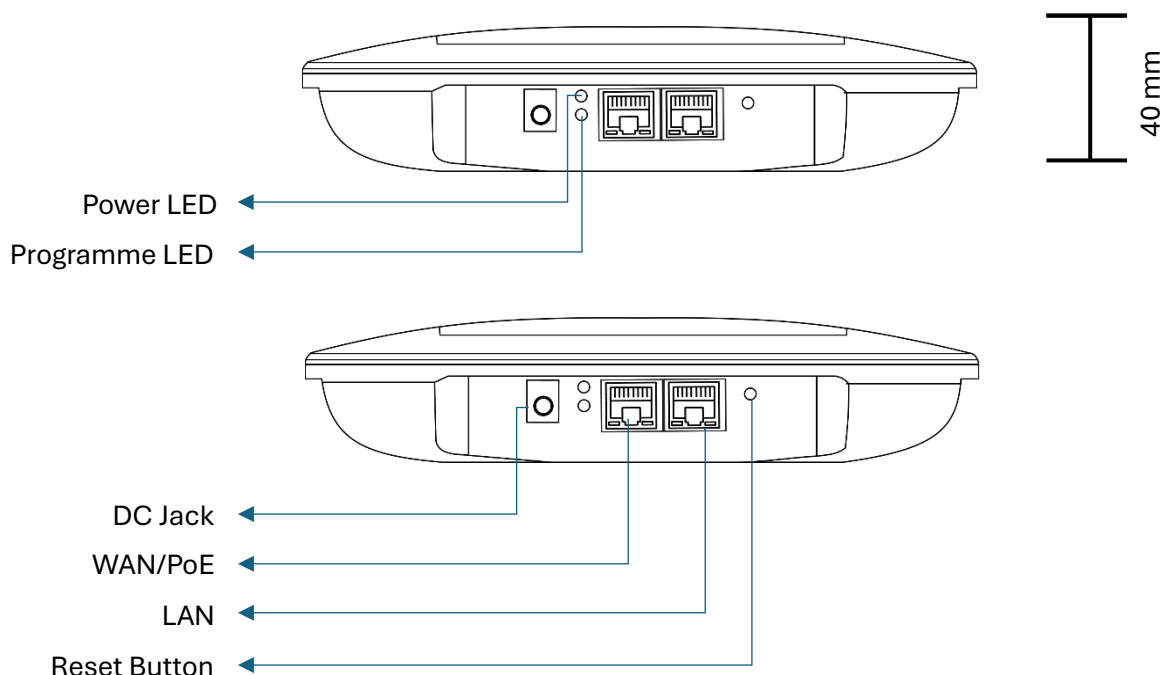

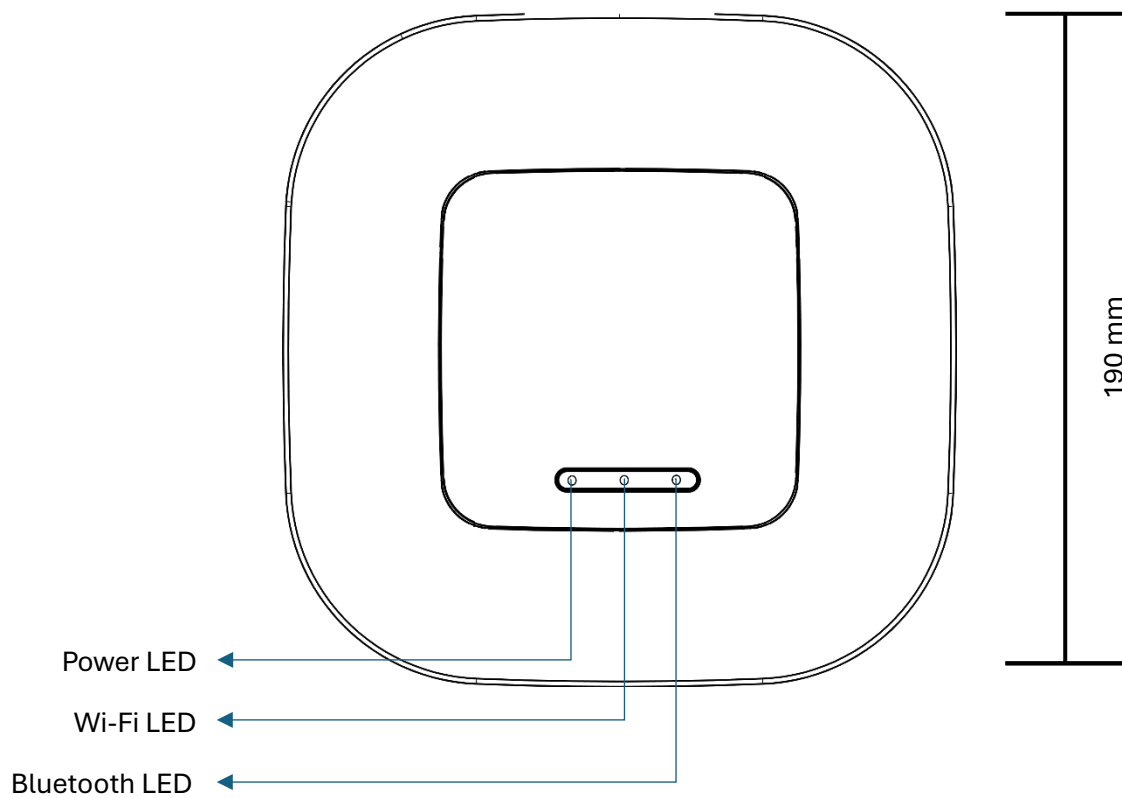

*All rights reserved, subject to change without prior notice.

Get in touch:



sales@invendis.com



www.silbonetworks.com



Invendis Technologies India Private Limited

No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068

