


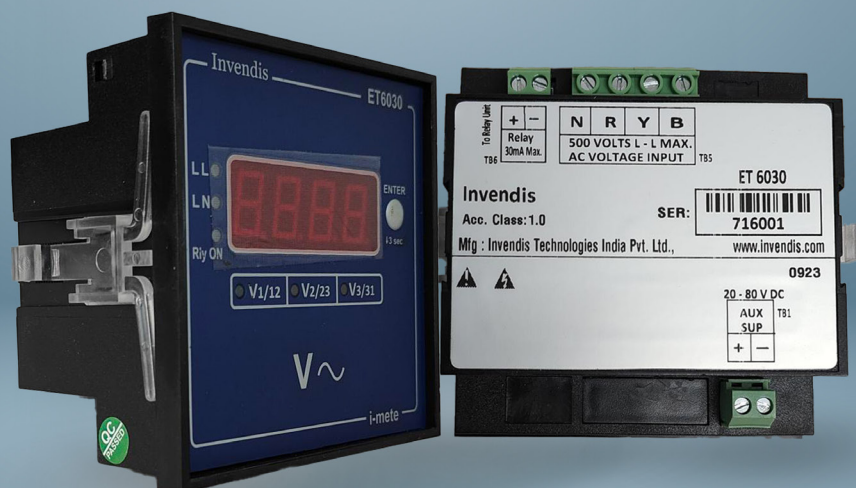

NANO SERIES DIGITAL PANEL METER

Our ET6030(V2.0) Series is basic 3Ph volt meter with built in provision for relay(30mA Max). True RMS voltage is measured and displayed. 3 phase voltage monitoring for over voltage and under voltage.

CLASS 1.0

VOLT METER

TRUE RMS

LOGGING ENABLED

FEATURES

- Single row display, Displays for both L-L, L-N voltages & For Relay ON/OFF Indication.
- A single 3 Element Meter caters to 3 Wire or 4 Wire.
- In any 1 Phase, if the voltage goes below 90V relay will operate. In any 1 Phase, If the voltage goes above 270V relay will operate.
- Under voltage status persists until voltage on any 3 Phase increases as per voltage setting. Over voltage on any 3 Phase drops persists until voltage drops below settings.
- Failure on any phase - Optional
- Failure & wrong sequence of phases - Optional
- Asymmetry & Neutral disconnection - Optional.
- Automatic scaling for Kilo or Mega units. Automatic placement of decimal point.
- Unrestricted range of user programmable CT and PT ratios from the front panel of the meter.
- Unique service support over-the-counter free replacement within warranty.

PARAMETERS DISPLAYED

Model	V(3Ph)	Remarks
ET 6030 (V2.0)	●	Single row display with LED Indication for Relay ON/OFF

TECHNICAL PARTICULARS

● Configuration	3 Phase, 3 Element; 3 / 4 Wire (Note Order code)
● Input V Nominal	415 V LT or 110 V through PT (line to line)
● Computation	True RMS for all Voltages
● Accuracy	Class 1.0 IEC 62053-21
● Display	Displays of 3 digit, 12.5 mm, 7 segment, super-bright LEDs
● Isolation	2000 V AC for one minute
● Safety	Measurement Category III, Pollution Degree 2 as per EN61010-1 First Edition
● Supply Voltage L-L	500V
● Operating Voltage L-L	500V
● Burden	0.1 VA typical per Voltage
● Ambient	Temp. 0-50 deg C, RH < 95% non-condensing
● Weight	~ 400 gm

OFFERED SPECIFICATION

• Weight	~ 400 gm
• Dimensions	96 x 96 mm (Bezel), x 28 mm
• Panel Cutout	(90+1-0) mm x (90+1-0) mm
• Mounting	Slide and Lock clamp
• Warranty	12 months from date of sale

Note: * Ordering option,
Type test carried at "Electrical Research and Development Association" Vadodara India.
Reports are available on request.



128,000+
Telecom Towers



700+
Solar Sites



15+ Global
MNO/Tower CO



54+
Countries



500,000+
Connected Assets



20,000+
Enterprise Users

Invendis
Invent, Discover.

DIN EN ISO 9001:2015

Get in touch :



sales@invendis.com



www.invendis.com



No. 230, 1st Cross, 38th Main, BOOHBCS Layout,
BTM 2nd Stage, Bangalore – 560 068

**SCAN FOR
MORE DETAILS**

