


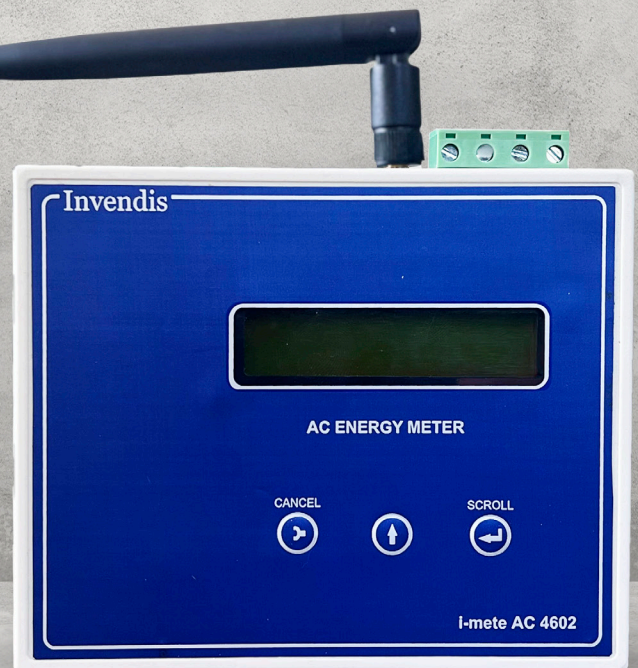

IoT ENABLED AC ENERGY METER

Our GSM-based meter embraces real-time AC power parameters which unlocks a world of precise power insights, empowering you to optimize consumption, boost efficiency. It's not just a meter; it's your gateway to a smarter, more sustainable future with energy at your fingertips. Experience the power of precision measurement with real-time data on the fly.

CLASS 1.0

4G ENABLED

DUAL SOURCE

3PH / 1PH

TRUE RMS

FEATURES


- Accuracy Class 1.0 IEC 62052
- True RMS Measurement
- Simultaneous Sampling of Volts & Amps
- User Programmable Password Protection
- Active energy Wh, positive energy accumulation
- 4G GSM Module built-in with Single SIM Interface (Wi-fi module optional)
- Dual source meter to record power consumption from two sources (not simultaneously)
- Direct communication with server for energy management and remote monitoring.
- Pluggable connectors for hot swappable at field
- Positive Energy accumulation Even with CT Reversal
- Field Programmable Star (Wye) or Delta or Single-Phase Configuration and Pre-configured CT with class 0.5
- AC Input Voltage
 - Phase to Phase: 10 VAC – 500 VAC
 - Phase to Neutral 15 VAC – 415 VAC

TECHNICAL PARTICULARS

OFFERED SPECIFICATION

● AC Current Measurement	Average, AR, AY, AB
● AC Voltage Measurement	Average, VLL (RY, YB, BR), VLN (RN, YN, BN)
● Power Factor (PF)	Average & Phase wise
● Active Power (kW)	Total & Phase wise
● Apparent Power (kVA)	Total & Phase wise
● Frequency (Hz)	45 to 65 Hz
● Active Energy (kWh)	Both EB & DG
● Communication	4G GSM with Single SIM
● Power Input	48V DC
● Display Type	2 Line LCD with back light
● Mounting Type	DIN Mount
● Local Settings	Password protected, through SCROL keys
● Power Consumption	Approx. 4 Watts
● Operating temperature	-10°C to +55°C
● Storage temperature	-25°C to +70°C
● Humidity	5% to 95% non-condensing

Mechanical Specifications

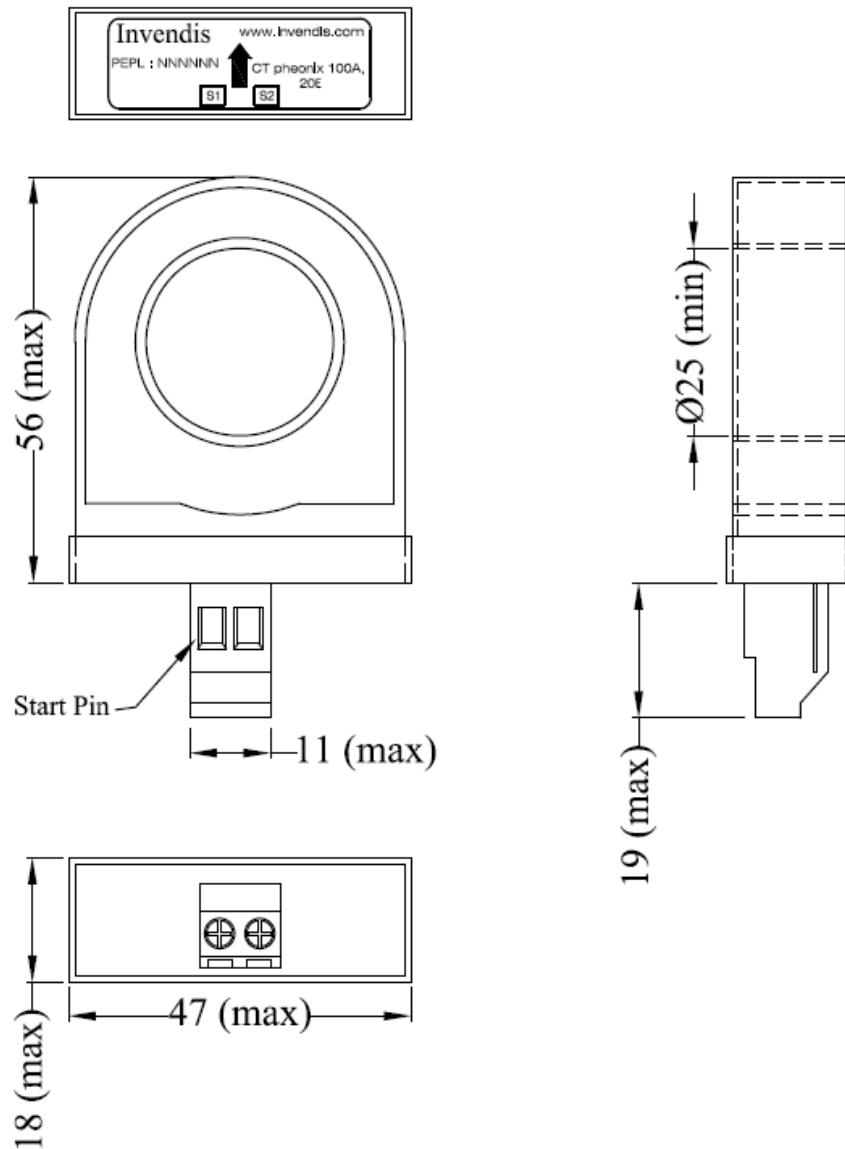

Electrical Characteristics:

- Inductance (@100Hz/0.3V): W1(1-2): 105H min (measured prior to connection of burden resistor)
- DC Resistance: 1850 Max (measured prior to connection of burden resistor)
- Current rating: 100A
- Max Current Rating: 200A
- Secondary Burden: 20.150±1%
- Turns Ratio : 1:2500
- Frequency: 50/60 Hz
- Output Voltage at 100A : 0.8V±0.5%
- Insulation resistance: 100M @500VDC
- Operating Temperature: -20°C to +85°C
- Dielectric Voltage: 1.5kVac max

CT SPECIFICATIONS

CT output	333mV@100A,50Hz
CT Type	Solid Core
Accuracy	1.0% of FSD Offset 1.0% of FSD
Power Supply	Self-generated EMF
Linearity	±1%FS
Temperature Drift	≤±1mV/°C
Response time	<20ms
Inner Diameter	16mm
Operating temperature range	-10°C to +55°C
Storage temperature range	-25°C to +70°C
Insulation Resistance	100MΩ
Insulation Voltage	3KV
Case	ABS Plastic



118,000+
Telecom Towers



700+
Solar Sites



15+ Global
MNO/Tower CO



26+
Countries



500,000+
Connected Assets



20,000+
Enterprise Users

DIN EN ISO 9001:2015

Get in touch :



sales@invendis.com



www.invendis.com



No. 230, 1st Cross, 38th Main, BOOHBCS Layout,
BTM 2nd Stage, Bangalore – 560 068

Invendis
Invent, Discover.

**SCAN FOR
MORE DETAILS**

