

XG-82-2MI (8 Port Semi Managed Switch)

DATA SHEET

PRODUCT INFO

INTERFACE

8x 10/100/1000, 2x SFP

POWER

AC Power (100-240VAC, 50-60 Hz)

PoE & POWER BUDGET

120 W (Max)



Hardware Specification

Ethernet	8 x 10/100/1000 Mbps
SFP	2 x SFP, 2.5Gbps
Console	Serial console
Status LED	PWR(On/Off), LAN Activity LED (Green: 10/100 Mbps Amber: 1000 Mbps), PoE Out LED, SFP Status LED, SYS LED.
PoE Standard	802.3at & 802.3af, Remote power and Data feeding up to 100m
PoE Budget (Per Port)	30 W (Max)
Total PoE Budget	120 W(Max)
Power Connector	Panel Mount Plug Adaptor Power Socket 3 Pin
Input Voltage Range	100-240 VAC, 50-60 Hz
Power Consumption	Idle :5-7 W Full Load: 120 W
Enclosure	Sheet Metal
Mounting	Option 1: 19 inch Rack Mount Option 2: Table Top
Design	Fanless
Dimensions	280 mm x 116 mm x 44mm (WxLxH)
Weight	1000 gm

Features

Layer	Layer 2
Management Type	Managed
Smart Managed Switch	Yes
Switching Capacity	20 Gbps
MAC Address table entries	8K
Packet Forwarding Rate	14.88 Mpps
Packet Buffer Size	4 Mbit
Jumbo Frame	15K Byte
VLAN	32
Basic Function	Compatible with IEEE 802.3AF/AT compliant Powered Devices (PD) Wire-speed forwarding MAC self-learning and aging IEEE802.3X Full-duplex and backpressure for half-duplex mode

Spanning Tree Protocol	Support 802.1d STP Support 802.1S (MSTP)
Security	MAC Manage, Storm Control, Traffic Monitoring, DHCP Snooping
QoS	QoS Basic, QoS Advance (802.1p)
Switch Monitoring and Management	Web, CLI (Console Port, Telnet, SSH), SNMP V1/V2, Support trap: cold start, warm start, link down and link up
EEE	Support Energy-Efficient Ethernet (EEE) function (IEEE802.3az)
PoE	POE configuration, POE scheduling management, etc.
VLAN Function	Port-based VLAN, Tag based VLAN (802.1Q)
DHCP Function	DHCP Snooping, DHCP Relay
Managed Features	IGMP Snooping, LAG, Port Mirror, LLDP Config, LLDP Neighbour, Loop Prevention, ERPS.
Diagnostics	Ping Tool, Cable diagnostics
Configuration Utility	Import and Export Configuration backup

Operational & Environmental

Storage Temperature	-30 ~ 70 °C
Operating Temperature	0~ 60 °C
Humidity	10 ~ 90% (non-condensing)


Standard Packaging

Option 1: Switch, Power Cord and Rack Mount Brackets

Option 2: Switch, Power Cord

Images

UI Options of XG-82-2-MI

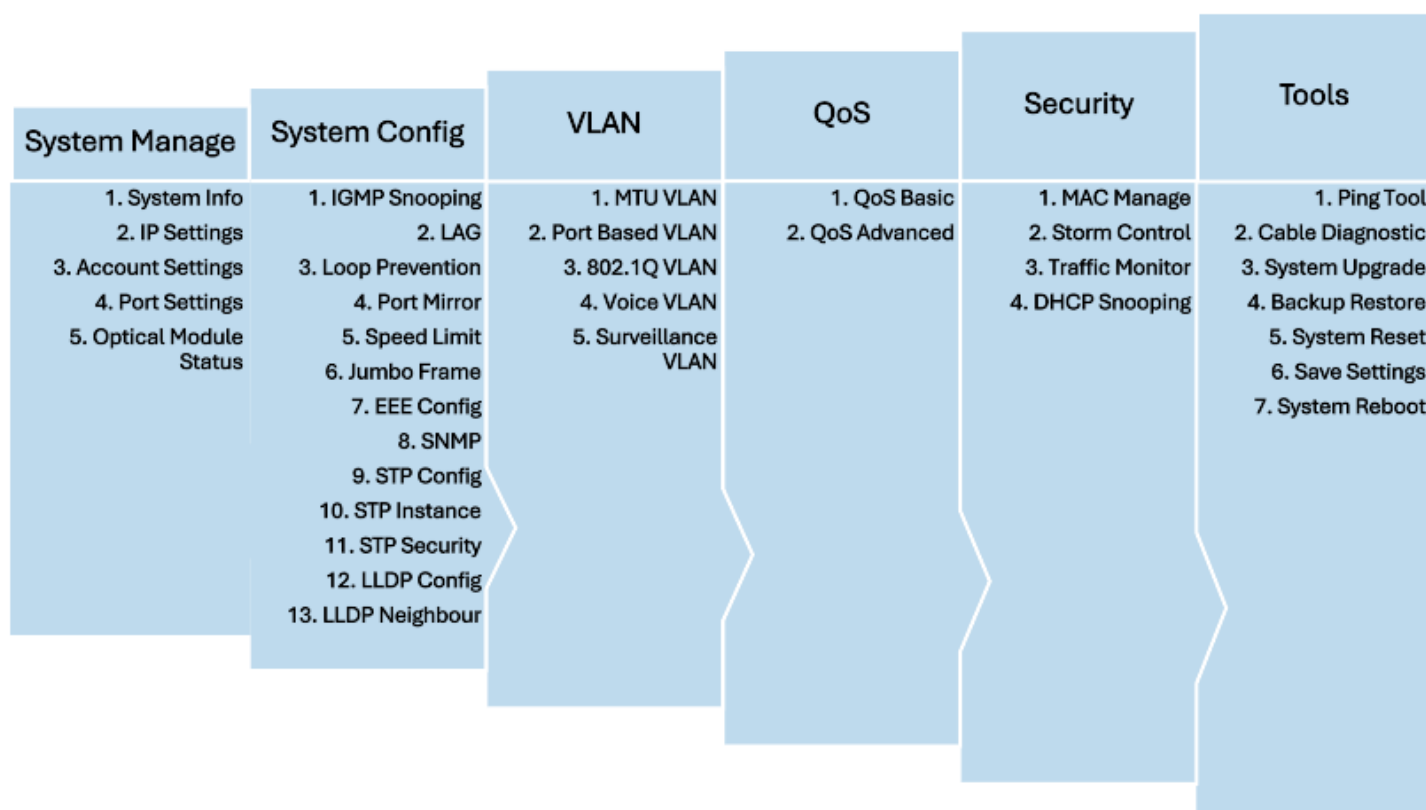



Cable Diagnostics

Port Index:

Test

Pair	Cable Status	Cable Length (m)
A	normal	2.4
B	normal	2.4
C	normal	2.4
D	normal	2.4

Attention:

1. Only support cable diagnostics for 1G speed.
2. During cable diagnostics, please do not refresh the webpage, close the webpage, or make any other configurations.

Option 1: Rack Mount



Option 2: Table Top



*All rights reserved, subject to change without prior notice.

Get in touch:



sales@invendis.com



www.silbonetworks.com <https://invendis.com/>



Invendis Technologies India Private Limited

No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068

