

ODU-MT7981

DATASHEET

PRODUCT INFO

PROCESSOR

MediaTek MT7981, 512MB DDR RAM, 128MB NAND

CELLULAR

4G/3G/2G with Dual SIM, External 5dBi antenna

5G Ready (Support for 5G in case of 5G requirement)

Wi-Fi

NA

INTERFACE

1x WAN 10/100

POWER

PoE IN (802.3af (48V-57V))

OPERATING SYSTEM

Open-WRT Linux



Hardware Specification

CPU	MediaTek MT7981
RAM	512MB
FLASH	32MB
WAN	1x 10/100
Cellular	M.2 Quectel EC200A LTE 4G module
SIM	2x Nano SIM (1x Active & 1x Passive)
Wi-Fi	NA
RTC	Built-in RTC
Reset	Pinhole Reset Button
Antenna	Cellular: 2x N Type Connector
Status LED	1x Power, 1x Sys, 1x Mode, 1x ACT, 2x Program, 8x Signal Strength, 2x SIM, 5x Ethernet
Power Connector	PoE in
Input Voltage Range	802.3af (48V-57V)
Power Adapter	Yes
Enclosure	Polycarbonate IP66 Housing
Mounting	WALL Mount
Design	Fanless
Dimensions	140 x 84 x 224 mm (W x H x D)
Weight	950 gm

Operational & Environmental

Storage Temperature	-20 ~ 60 °C
Operating Temperature	-0 ~ 50 °C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE SPECIFICATIONS

Cellular

Cellular Module	4G (LTE) - Cat 4 up to 150 Mbps, 3G - up to 42 Mbps, 2G - up to 236.8 Kbps
Status	Single strength (RSSI), SINR, RSRP, RSRQ
Band Management	Auto/User configurable
Operator Lock	Automatic/Manual
APN	Configurable, Auto APN
Modem configuration mode	Single SIM, Dual SIM
SIM switching	Signal strength, ICMP echo, Data limit based
PDP Type	IPv4, IPv6, IPv4v6
SIM Authentication	PAP,CHAP, No Authentication
SMS	Send SMS, Read SMS, SMS Commands

Firewall & Networking

Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Connection Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
Attack Prevention	SYN Flood Protection, Drop Invalid Packets
DHCP	Static and Dynamic
Multi-WAN Configuration	Configurable Failover, load balancing between Cellular WAN, Wi-Fi WAN and Wired.
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
Open VPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
IPsec Encryption	3DES, AES128, AES192, AES256
IPsec Authentication	SHA1, MD5, SHA256, SHA384, SHA512
IPsec DH Group	MODP768, MODP1024, MODP1536, MODP2048, MODP3072, MODP4096
PPTP/L2TP	Server & Client with/without MPPE Encryption
Monitoring Application	Modem Monitoring with ICMP Echo, Router Monitoring with ICMP Echo
Time Synchronization	NTP Client, RTC, Manual
Diagnostic	Ping, Traceroute, Modem Debug Info, Iperf, Download Logs
Other Features	MAC binding, Connection Diagnostics, URL Filtering, Router Health Monitoring, Package Manager

Remote Management

NMS	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
TR069	TR069 Client for CPE Management
SMS Commands	Reboot Command, Uptime Command

Operating System


Operating System	Open-WRT based Linux OS
Supported Languages	Shell scripting, C, C++
Development tools	SDK package with built environment provided (Optional)

Standard Packaging

ODU-MT7981-Outdoor Cellular Router with Polycarbonate IP66 Housing , 2x External Antennas, PoE Injector*, Mounting Kit.

SPATIAL MEASUREMENT:

Top View

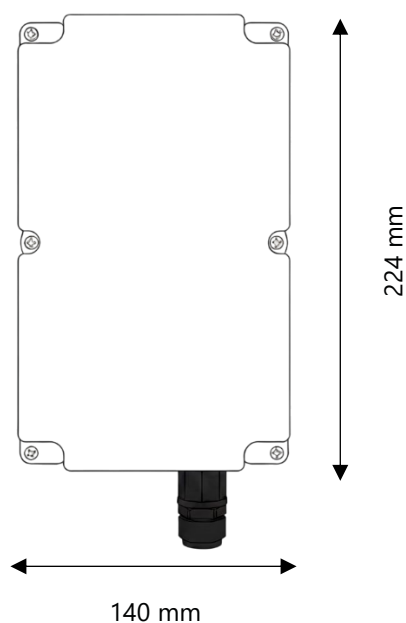

*All rights reserved, subject to change without prior notice.

Get in touch:



sales@invendis.com



www.silbonetworks.com



Invendis Technologies India Private Limited

No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068

