XB-82-2

DATA SHEET

PRODUCT INFO

INTERFACE
8x 10/100/1000

POWER
9-57 VDC

PoE & POWER BUDGET
NA

Hardware Specification

Ethernet	8 x 10/100/1000 Mbps (MDI/MDIX)
SFP	2 x SFP
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Orange: 1000 Mbps), SFP Status LED (Green: Connection status)
PoE	NA
PoE Standard	NA
PoE Budget (Per Port)	NA
Total PoE Budget	NA
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	Spring Loaded 2 wire connector
Input Voltage Range	9-57 Vdc
Power Consumption	5.5 W
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	56 mm x 110 mm x 114 mm (W x H x D)
Weight	300 Gm
Other	Grounding Screw

Operational & Environmental

Storage Temperature	-30 ~ 70 ˚C
Operating Temperature	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

Standard Packaging

XB-82-2 with Industrial Aluminium Enclosure

SPATIAL MEASUREMENT:

Top View

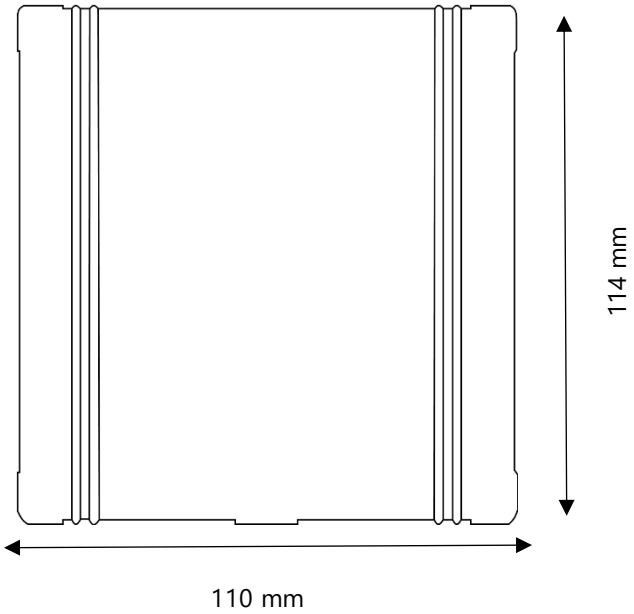

Front View

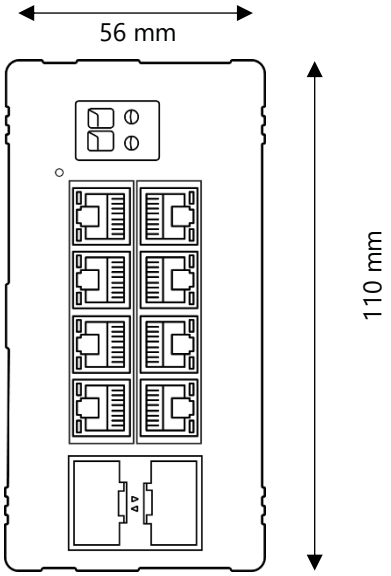

*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068