XC-80-1

DATA SHEET

PRODUCT INFO

INTERFACE
8x 10/100

POWER
9-30 Vdc

PoE & POWER BUDGET
NA

Hardware Specification

Ethernet	8 x 10/100 Mbps (MDI/MDIX)
Status LED	PWR(On/Off), LAN Activity LED.
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	2 Pin Screw TB
Input Voltage Range	9-30 Vdc
Power Consumption	<5W
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	45 mm x 110 mm x 95 mm (W x H x D)
Weight	300 Gm
Other	Grounding Screw

Operational & Environmental

Storage Temperature	-30 ~ 70 ˚C
Operating Temperature	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

Standard Packaging

XC-80-1 with Sheet Metal Enclosure

SPATIAL MEASUREMENT:

Top View

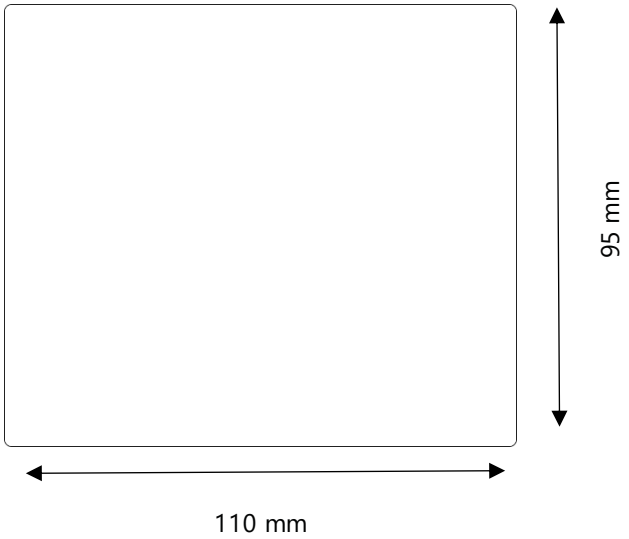

Front View

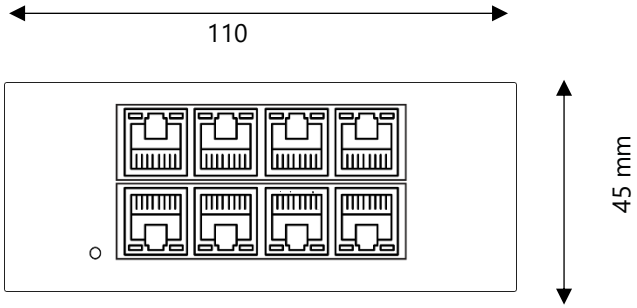

Side View

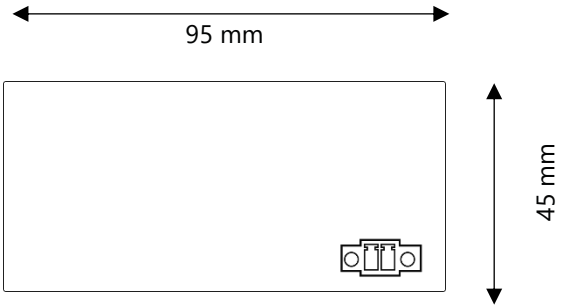

*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068