# XD-50-1

## DATA SHEET

## PRODUCT INFO

**INTERFACE**
5x 10/100

**POWER**
9-30 Vdc

**PoE & POWER BUDGET**
NA

## Hardware Specification

| | |
|---|---|
| Ethernet | 5 x 10/100 Mbps (MDI/MDIX) |
| Status LED | PWR(On/Off), LAN Activity LED. |
| MAC Address table entries | 2000 |
| Jumbo Frame | 9216 bytes |
| Buffer size | 128 KB |
| Power Connector | 2 Pin Screw TB |
| Input Voltage Range | 9-30 Vdc |
| Power Consumption | <5W |
| Enclosure | Sheet Metal Enclosure |
| Mounting | DIN rail mounting Kit (Optional) |
| Design | Fanless |
| Dimensions | 27 mm x 112 mm x 94 mm (W x H x D) |
| Weight | 250 Gm |
| Other | Grounding Screw |

## Operational & Environmental

| | |
|---|---|
| Storage Temperature | -30 ~ 70 ˚C |
| Operating Temperature | 0~ 50 ˚C |
| Humidity | 10 ~ 90% (non-condensing) |

## Standard Packaging

XD-50-1 with Sheet Metal Enclosure

# SPATIAL MEASUREMENT:

Top View

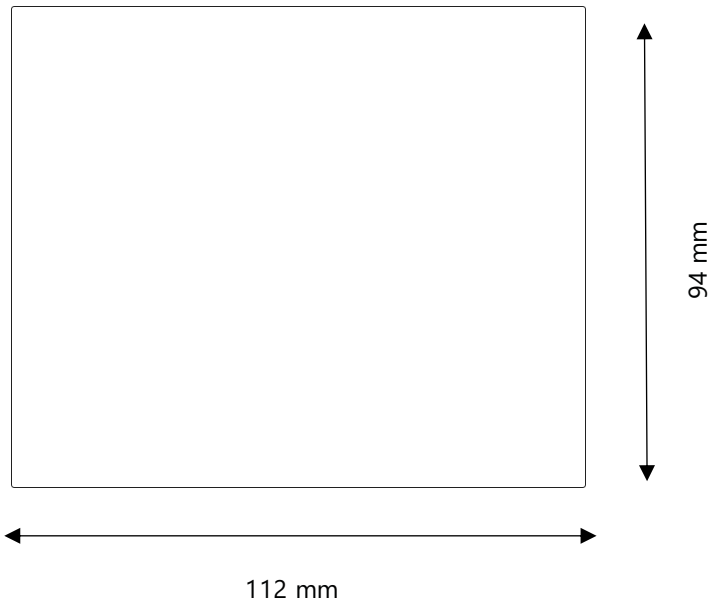


Front View

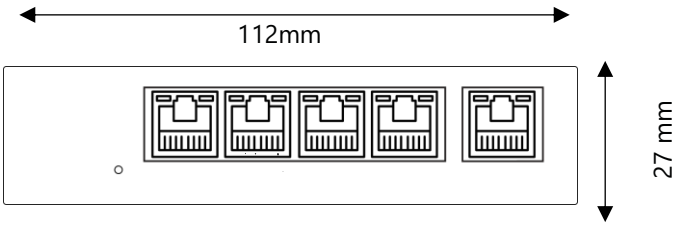


Side View

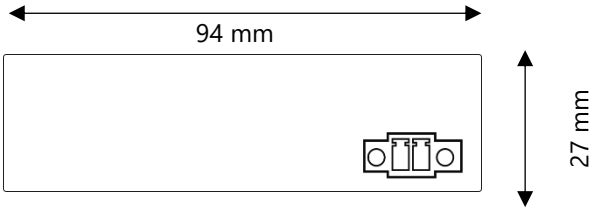


*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068