XG-82-2L Managed Switch

DATA SHEET

PRODUCT INFO

INTERFACE
8x 10/100/1000, 2x SFP

POWER
Dual Input: 44-57 VDC

PoE & POWER BUDGET
240 W (Max)

Hardware Specification

Ethernet	8 x 10/100/1000 Mbps
SFP	2 x SFP, 2.5Gbps
Console	Serial console (Optional)
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Amber: 1000 Mbps), PoE Out LED, SFP Status LED, SYS LED.
PoE Standard	802.3at & 802.3af, Remote power and Data feeding up to 100m
PoE Budget (Per Port)	30 W (Max)
Total PoE Budget	240 W(Max)
Power Connector	Option 1: 2 x Screw Terminal block Option 2: Spring Loaded 2 Pin Terminal block and DC Jack
Input Voltage Range	44-57 Vdc
Power Consumption	Idle :6 W Full Load: 250 W
Enclosure	Industrial Aluminium Enclosure / Sheet Metal
Mounting	Option 1: Din rail Mount Option 2: Table Top
Design	Fanless
Dimensions	200 mm x 120 mm x 55mm (WxLxH)
Weight	675 Gm (Industrial Aluminium Enclosure)

Features

Layer	Layer 2
Management Type	Managed
Smart Managed Switch	Yes
Switching Capacity	20 Gbps
MAC Address table entries	8K
Packet Forwarding Rate	14.88 Mpps
Packet Buffer Size	4 Mbit
Jumbo Frame	15K Byte
VLAN	32
Basic Function	Compatible with IEEE 802.3AF/AT compliant Powered Devices (PD) Wire-speed forwarding MAC self-learning and aging IEEE802.3X Full-duplex and backpressure for half-duplex mode

Spanning Tree Protocol	Support 802.1d STP Support 802.1S（MSTP）
Security	MAC Manage, Strom Control, Traffic Monitoring, DHCP Snooping
QoS	QoS Basic, QoS Advance (802.1p)
Switch Monitoring and Management	Web, CLI (Console Port, Telnet, SSH), SNMP V1/V2, Support trap: cold start, warm start, link down and link up
EEE	Support Energy-Efficient Ethernet (EEE) function (IEEE802.3az)
PoE	POE configuration, POE scheduling management, etc.
VLAN Function	Port-based VLAN, Tag based VLAN (802.1Q)
DHCP Function	DHCP Snooping, DHCP Relay
Managed Features	IGMP Snooping, LAG, Port Mirror, LLDP Config, LLDP Neighbour, Loop Prevention, ERPS.
Diagnostics	Ping Tool, Cable diagnostics
Configuration Utility	Import and Export Configuration backup

Operational & Environmental

Storage Temperature	-30 ~ 70 ˚C
Operating Temperature	0~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

Standard Packaging

Option 1: Switch, 2x TB Connectors and Din Rail.

Option 2: Switch, 1x TB Connector.

Images

UI Options of XG-82-2

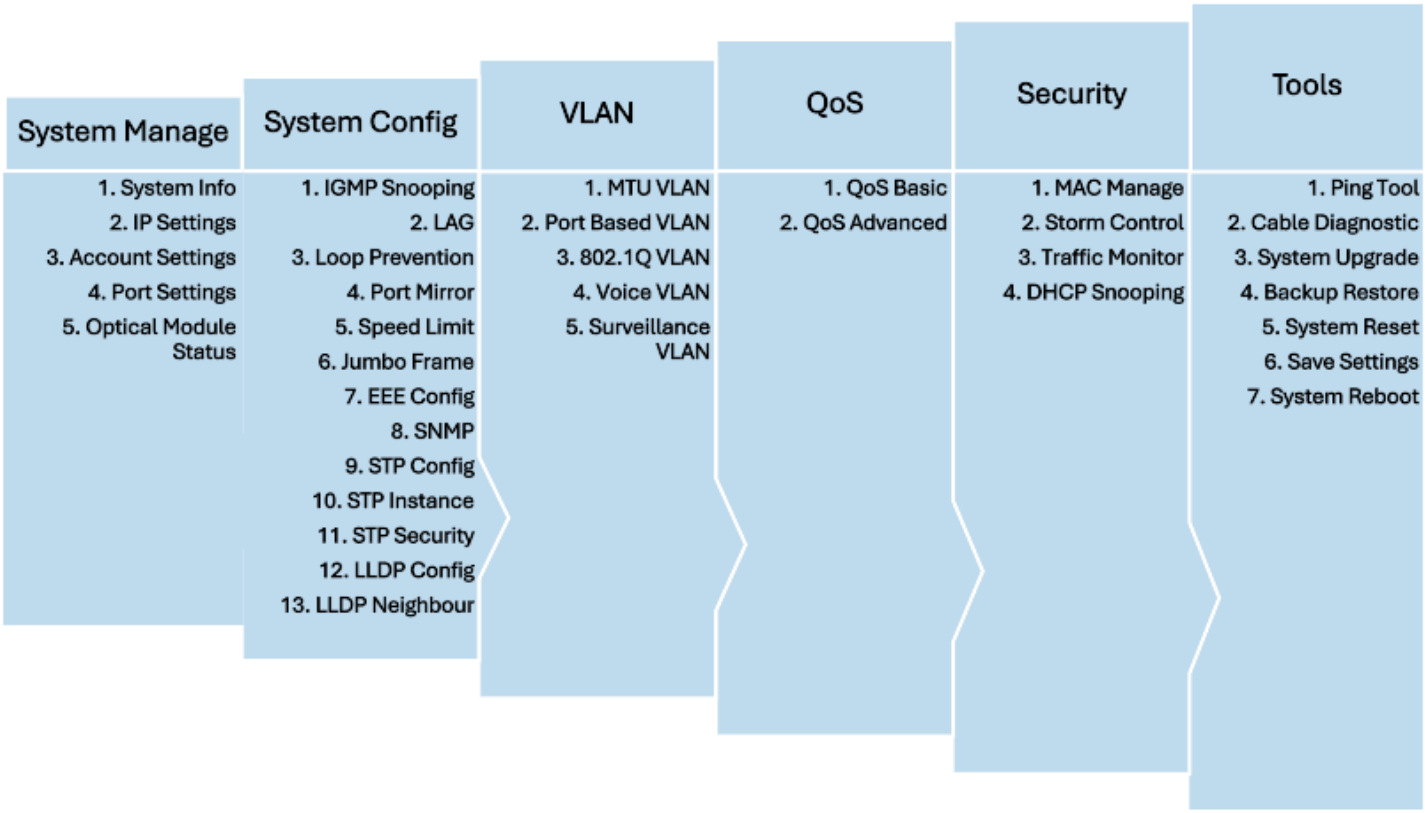

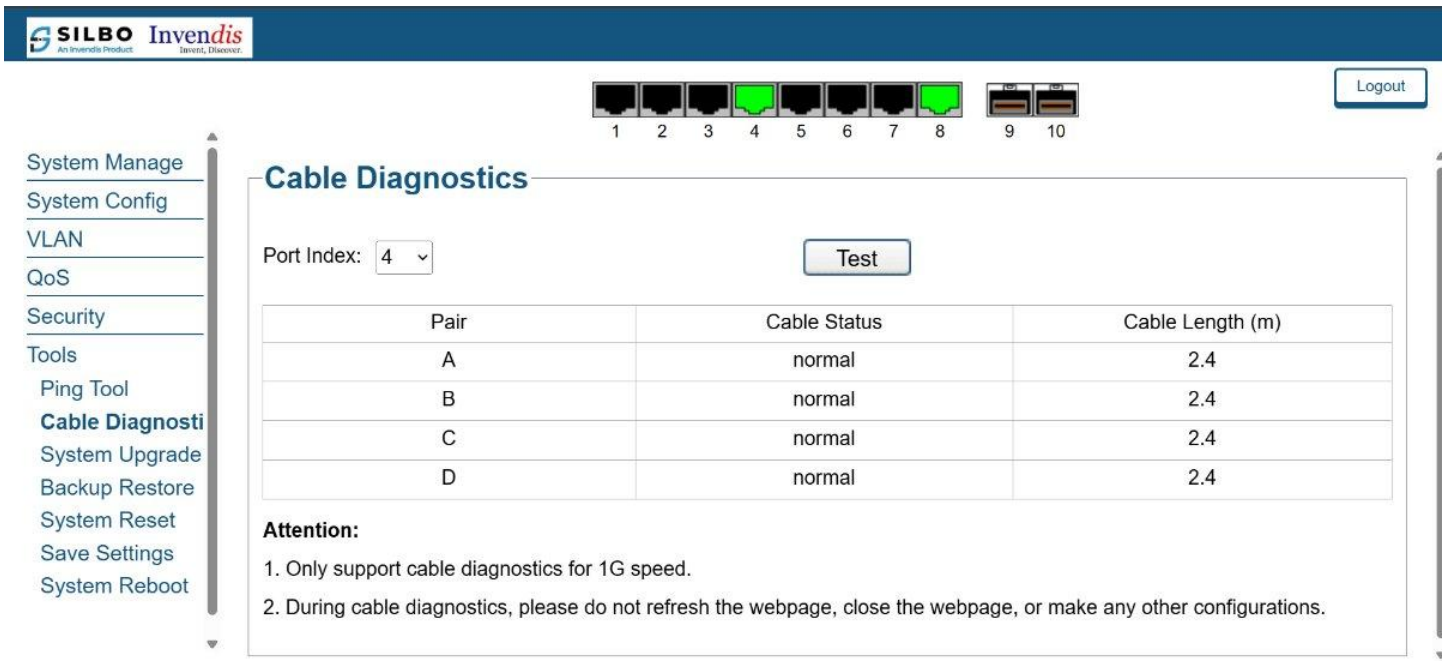

Option 1: Table Top

Option 2: Din Rail

*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com https://invendis.com/

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068