Brief Specification of Intel X7425E based SDWAN

Copyright © 2025 INVENDIS Technologies

Brief Specification of Intel X7425E based SDWAN

HARDWARE SPECIFICATION	
CPU	Intel X7425E, 4 cores with 3.4GHz Turbo Frequency
RAM	32GB DDR5 SODIMM (Max)
Ethernet Ports	4 x 10/100/1000 (RTL811H)
Cellular	One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems.
SIM	2x Nano SIM
Wi-Fi	One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0)
Storage	One M.2 (B Key,2280), Upto 512GB SSD, Upto64GB eMMC
TPM	Firmware/Hardware TPM
RTC Battery Backup	3V, CR2032
Input Power	12V DC , DC Jack
Button	Software Reset
LEDs	Power, SATA, WiFi (depending on WiFi module), Cellular Activity (depending on modem), Optional Cellular Signal Strength (needs custom application. API's will be provided), Link and Activity for Ethernets.
Antenna	Cellular : 8 x SMA and Wifi : 2 x SMA for 2.4 and 5 GHz
USB	2 x USB2.0
HDMI	1
Console	1 x Type B Micro USB
Enclosure	Aluminum Heat Sink with CRCA Enclosure
Mounting	Desktop Mount/ Wall Mount / 19 inch rack mount / Vesa Mount
Design	Fan less
Dimensions	150mm X 160mm X 52.8mm (L X W X H) (w/o mounting options) *(*Dimensions will vary depending on the mounting option chosen.)*
Operational & Environmental	
Storage Temperature	-20 ~ 75°C
Operating Temperature	0 ~ 50°C
Humidity	10 ~ 90% (non-condensing)
Ingress Protection Rating	IP30
Operating System	
Operating System	Ubuntu/Oracle Linux/OpenWRT/Windows

Copyright © 2025 INVENDIS Technologies

Brief Specification of Intel X7425E based SDWAN

Block Diagram:

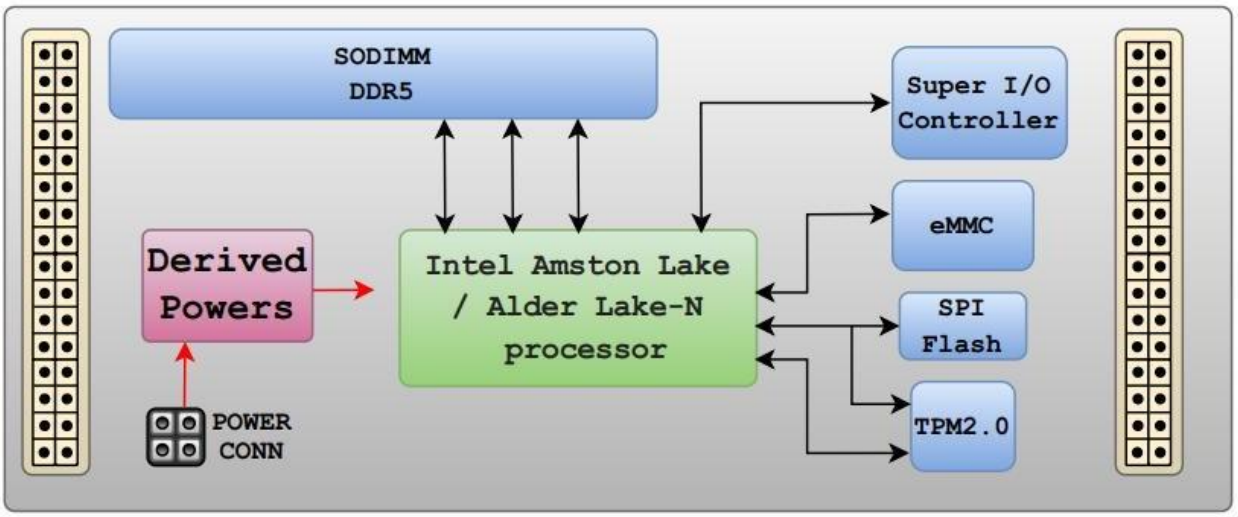

INTEL ADL / AML carrier board-3 (INV-CE)

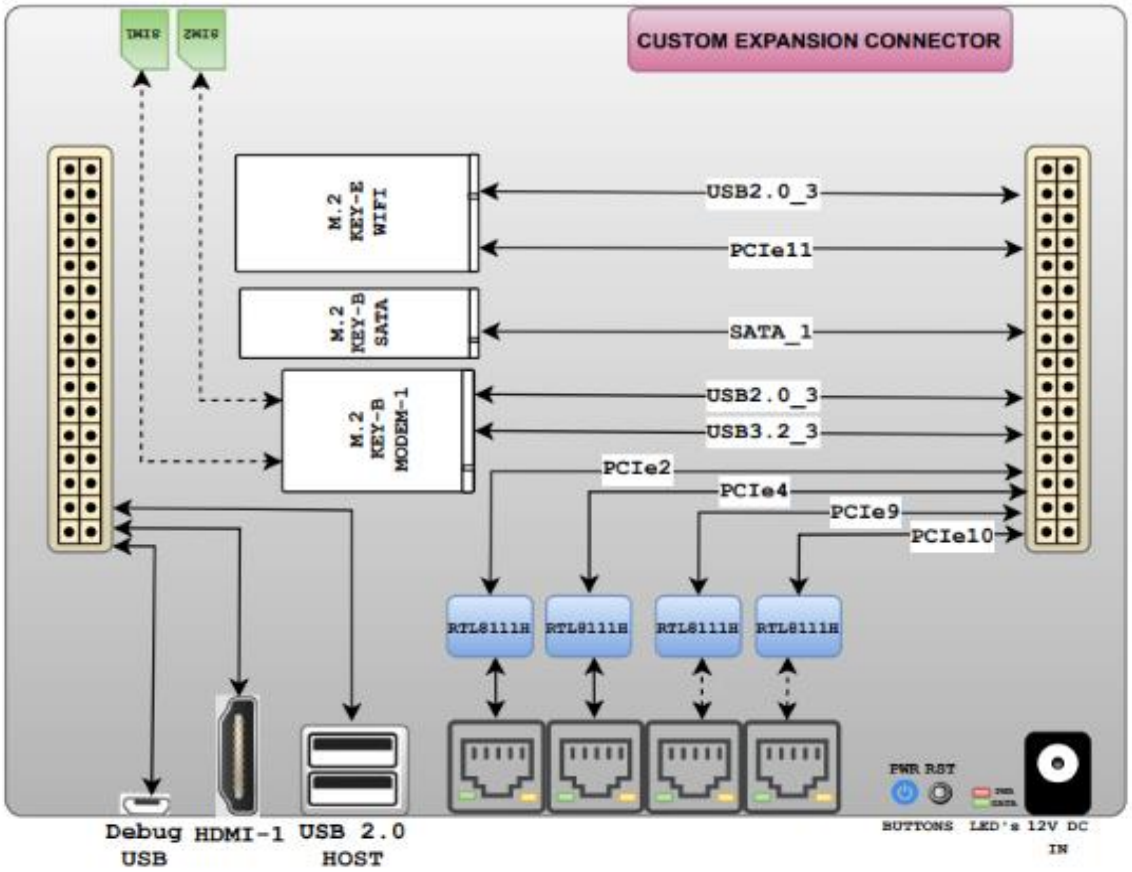

Copyright © 2025 INVENDIS Technologies