RV54-1

DATA SHEET

PRODUCT INFO

PROCESSOR
MediaTek MT7621, 512MB DDR RAM, 32MB Flash

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

Wi-Fi
Dual-Band Wi-Fi, AP/Station, External 5dBi antennas

INTERFACE
5x WAN/LAN 10/100/1000

POWER
12V DC IN

OPERATING SYSTEM
Open-WRT Linux

Hardware Specification

CPU	MediaTek MT7621
RAM	512MB
FLASH	32MB
WAN	1x 10/100/1000 Mbps
LAN	4x 10/100/1000 Mbps
Serial Interface	NA
SIM	2x Nano SIM (1xActive and 1x Passive)
Wi-Fi	802.11 b/g/n/ac
RTC	Built-in RTC
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector, Wi-Fi: 2x SMA connector
Status LED	1x Power , 1x Sys, 1x Mode, 1x ACT, 2x Program, 1x 2.4 GHz Wi-Fi, 1x 5GHz Wi-Fi, 6x Signal Strength, 2x SIM, 5x Ethernet
Power Connector	DC Jack
Input Voltage Range	12 Vdc
Power Adapter	YES
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	110 x 60 x 95 mm (W x H x D)
Weight	400 gm
Other	Grounding Screw

Operational & Environmental

Storage Temperature	-30 ~ 70 ˚C
Operating Temperature	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE SPECIFICATIONS

Cellular

Cellular Module	4G (LTE) - Cat 4 up to 150 Mbps, 3G - up to 42 Mbps, 2G - up to 236.8 Kbps
Status	Single strength (RSSI), SINR, RSRP, RSRQ
Band Management	Auto/User configurable
Operator Lock	Automatic/Manual
APN	Configurable, Auto APN
Modem configuration mode	Single SIM, Dual SIM
SIM switching	Signal strength, ICMP echo, Data limit based
PDP Type	IPv4, IPv6, IPv4v6
SIM Authentication	PAP,CHAP, No Authentication
SMS	Send SMS, Read SMS, SMS Commands

Wi-Fi

Technology	802.11 b/g/n/ac
Channel Selector	Auto/Configurable
Channel Width	20 MHz, 20/40 MHz
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
TX Power	Configurable
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Scheduler	Scheduled ON/OFF
MAC ID Filtering	Whitelisting, Blacklisting
Other	WMM (Enabled/Disabled)

Firewall & Networking

Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Connection Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
Attack Prevention	SYN Flood Protection, Drop Invalid Packets
DHCP	Static and Dynamic
Multi-WAN Configuration	Configurable Failover, load balancing between Cellular WAN, Wi-Fi WAN and Wired.
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
Open VPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
IPsec Encryption	3DES, AES128, AES192, AES256
IPsec Authentication	SHA1, MD5, SHA256, SHA384, SHA512
IPsec DH Group	MODP768, MODP1024, MODP1536, MODP2048, MODP3072, MODP4096
PPTP/L2TP	Server & Client with/without MPPE Encryption
Monitoring Application	Modem Monitoring with ICMP Echo, Router Monitoring with ICMP Echo
Time Synchronization	NTP Client, RTC, Manual

Diagnostic	Ping, Traceroute, Modem Debug Info, Iperf, TCP DUMP
Other Features	MAC binding, URL Filtering, Router Health Monitoring,
Captive portal	Redirects to Particular URL over LAN and WAN interfaces
Site configuration	For Unique Identification of the Device
Download Logs	Kernel Log, System Log, Modem Log, MonitorApp Log, Esim Log, Power ON/OFF Log, NTPSync Log, NMS Log, Wan Status Log.
SNMP	SNMP Agent, SNMP Traps.
Schedule Back UP Configuration	Scheduled backup File transfer to FTP server
Network Redundancy	VRRP

Remote Management

NMS	Remote Monitoring & Management Platform for SILBO Networking products, NMS Configuration Retain.
NMS VPN	Remote Access of SILBO and non-SILBO Networking Device
TR069	TR069 Client for CPE Management
SMS Commands	Reboot Command, Uptime Command, Network info Command.
Health Monitoring	Scheduled Publishing of device parameters over http, MQTT and MQTTs

Operating System

Operating System	NA
Supported Languages	Open-WRT based Linux OS
Development tools	Shell scripting, C, C++

Standard Packaging

SDK package with built environment provided (Optional)

SPATIAL MEASUREMENT:

Top View

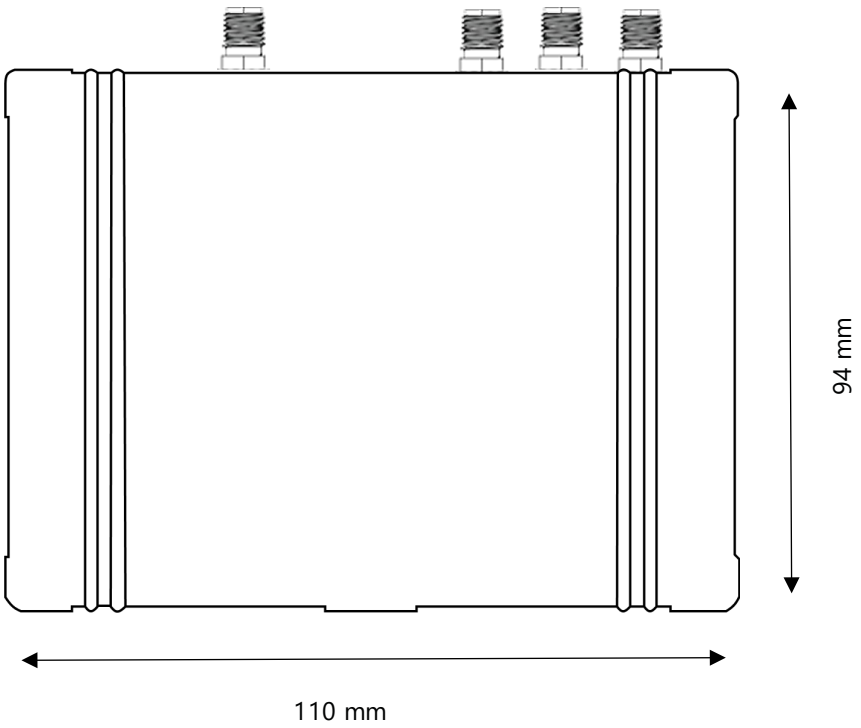

Front View

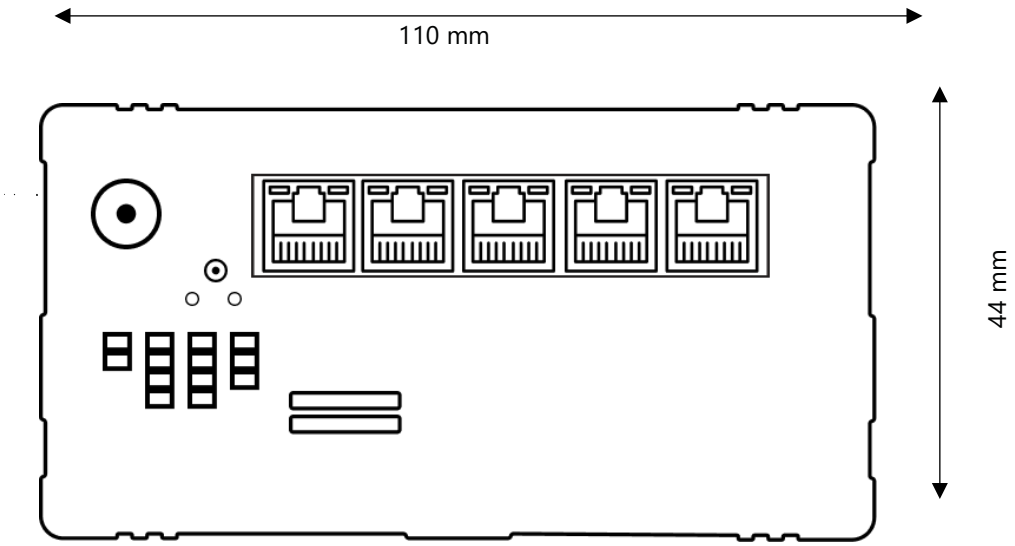

Rear View

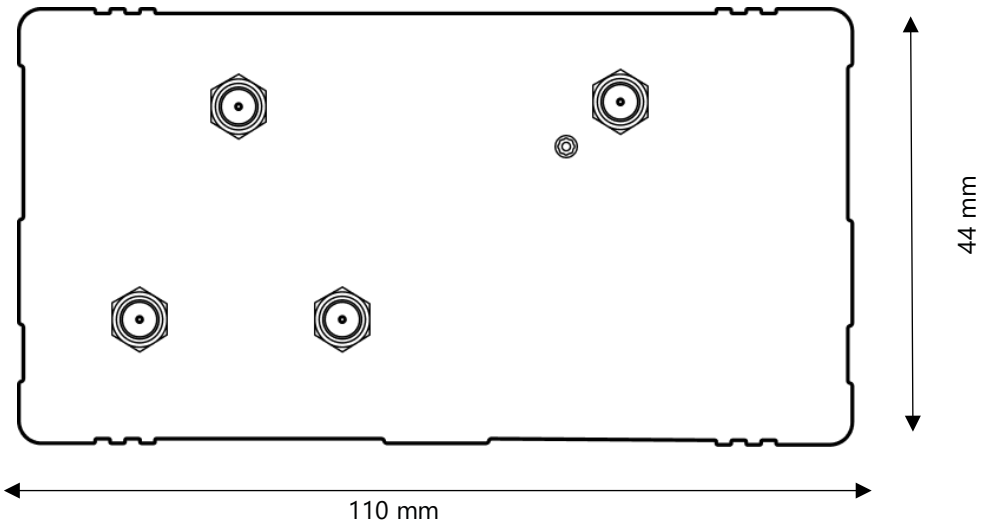

*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068